

CRYOGENIC VALVES

PRODUCT CATALOGUE





PERFORMING IN DEMANDING APPLICATIONS

Ball Valves & Actuators for the most demanding, challenging and hazardous applications is our passion and profession for the last 70 years. We believe in designing, manufacturing and supplying control and shutoff components and solutions that improves the overall safety, integrity and sustainability of the systems they are installed in.

Designed, manufactured and tested according to the highest standards, our products allow us to partner within systems that flows and control varied gases and liquids in divers markets especially where extreme temperatures and pressures are involved, hazardous materials are used and system performances are critical.

We are leading in cryogenic ball valve-based control solutions, emergency shutoff ,High Pressure and Severe Service and specially designed solutions. Believing that supplying and developing the most effective, safe and reliable products for the global leaders in the Gas distribution Severe Service and BioTech markets continually challenges us to improve our capabilities and products. Best coping with our prestigious customers’ most challenging requirements technically, operationally and commercially is the outcome and our contribution to the development of these high end markets.

Table of contents

About Habonim	6
Habonim Valves	11
Cryogenic Valves	37

 SANITARY	 INDUSTRIAL	 HIGH TEMP.	 HIGH PRESSURE
 CONTROL	 ACTUATORS	 CRYOGENIC	 SPECIAL USE



HOW TO USE THIS CATALOGUE

This catalogue provides information in a hierarchical structure starting from Habonim company general information, product families, product lines, product series and to a single product data.

When using information of any level, the aggregate information of the levels above would apply and should be taken into consideration where applicable.

Online Version

A live and up-to-date electronic version of this catalog is available for online use and download on Habonim: www.habonim.com



In the case of discrepancies between the print and electronic versions, we recommend to use the latest version (the version date is printed on the back cover).

Proprietary Note

This catalog is the exclusive property of Habonim Industrial Valves and Actuators Ltd. Any unauthorized reproduction of this catalog, in whole or in part, shall be prosecuted.

Disclaimer

The products and datasheets in this catalog reflect current Habonim standard production specifications. Habonim Industrial Valves and Actuators Ltd. Reserves the right to modify products and materials, including modifications undertaken to comply with specific customer requests and technical specifications without further notice.

It is always the system designer and the end-user responsibility to verify all equipment use in their system is properly selected to ensure safety and integrity of their systems. Habonim offers only general information based on common market knowledge and standard market adaptations for its valves. For each system and use, the system designer and end-user must consider the particular operations conditions, media parameters and any other implication of their system for the proper selection of valves to be used on their solely responsibility.

PRODUCT FAMILIES

Temperature		 													
°C	°F	ACCESSORIES							ACTUATORS						
650	1200	 HIGH TEMP.													
600	1100														
550	1000														
500	900														
450	800														
400	750														
350	650														
300	550	 SANITARY  INDUSTRIAL  CONTROL  HIGH PRESSURE													
250	480														
200	390														
150	300														
100	200														
50	120														
0	32														
-50	-58	 CRYOGENIC  SPECIAL USE													
-100	-148														
-160	-260														
-185	-300														
-196	-321														
-269	-450														
ASME Class	150 300 600 900 1500 2500 6000														
Pressure Bar	-1	0	16	20	40	50	100	150	200	250	350	420	700	1034	
Pressure Psi	-14	0	230	290	580	750	1500	2250	3000	3750	5000	6000	10000	15000	

ABOUT HABONIM

Sustainability, Safety and Health

Habonim management and employees around the world are dedicated to promoting, in every aspect of their work, the following principles and guidelines:

Sustainability

Habonim management pledges to comply with the relevant laws, standards, and regulations to preserve the environment and promote sustainability at company premises and in our products.

Safety & Health

Habonim aspires to a safe and healthy work environment, aiming for zero work accidents and promoting our employee's wellbeing. Management and the entire workforce comply with the relevant laws and regulations necessary to achieve this goal.

Operations

Habonim operates a global infrastructure to best support customers and projects by supplying our catalog standard products, specially adjusted catalog products and custom-made products and sub-systems. Ball valves, actuators and control packages are our core deliveries.

Standard Delivery

With the goal of offering our high-end products as well as our general-use products with best availability, best quality, cost-effectiveness and with simple communication, handling and operation, we mark selected items designated as **Standard Offer** in most of our product lines with the Green "Standard Delivery" mark in order to provide best availability and supply readiness.





Materials

Habonim uses and stocks metallic, polymeric and other materials used in our products, all sourced from well-recognized manufacturers with the required testing, certifications and documentation.

Heat numbers and materials certificates are managed throughout the manufacturing and assembling process to enable full backtracking for our product components.

Available Certifications, some supply as standard and some per request:

- Materials certificates per EN10204 type 2.2/3.1/3.2
- FDA / USP Class VI compliant for polymers, elastomers, and lubricants where applicable
- CE1935:2004 compliant for polymers, elastomers, and lubricants where applicable

Tagging, Traceability

Each product is tagged for traceability. For product identification, a stainless steel nameplate is placed on the product body.

Traceability of assembly and testing procedures, heat codes, and foundry identification as per B16.34 stipulations where applicable.



ABOUT HABONIM

Cleaning, Assembling and Packing

Habonim manages different levels of cleaning, assembling and packing lines to meet different levels of end product and use requirements:

Commercial Service

Excessive hydrocarbon films, water, rust or mill scale, shop dirt, filings, chips or loose weld spatter is removed from the valve parts.

- Accessible surfaces are inspected for cleanliness by the naked eye under bright white light.
- Inaccessible surfaces are inspected and cleaned indirectly by wiping.
- A sticker on the package indicates the cleaning grade of the product.

Oxygen

A meticulous cleaning and assembly procedure eliminate the ignition hazards that can be caused by the presence of hydrocarbon oil, grease, and metal chips.

Our process of cleaning, assembling and packing refers to international standards in partial or in full:

- ASTM A380 • CGA G 4.1 • EN 12300

Habonim uses an environment friendly, alkaline-based degreasing process with controlled parameters. Valves are assembled in an oil-free restricted area by personnel who are specially equipped and trained to perform this task. The assembling area, work surfaces, equipment and tools are specially maintained to ensure cleanliness requirements are met.

- Valves are capped ends and plastic bagged
- A sticker on the plastic bag indicating "oxygen use"





Quality

Habonim strives to deliver quality products that meet and exceed customer expectations, providing complete and total satisfaction and to operate, instruct and train employees globally in light of standards such as:

- ISO 9001:2015
- CE PED 2014/68/EU (Module H)
- ATEX 2014/34/EU
- API SPEC Q1: 2013
- TPED 2010/35/EU and TPE - CDG 2009 – for specific product lines
- IEC 61508-2:2010 (SIL 2 / 3) – for specific product lines
- SIL IEC 61508-1,2, 2010/35/ EU – for specific product lines


Habonim's management diligently monitors goals and objectives and continually enhances processes and products as well as the safety and environmental practices in light of the above.

Testing and Laboratories

Habonim operates a wide range of testing laboratories and equipment for ongoing and R&D needs and certifies products for cryogenic, high pressure, aggressive or clean, industrial use and more.

Habonim carries out external and internal testing and certification of products per customers' requests and market trends on a regular basis and offer a wide range of certified products for diverse certification bodies as but not limited to:



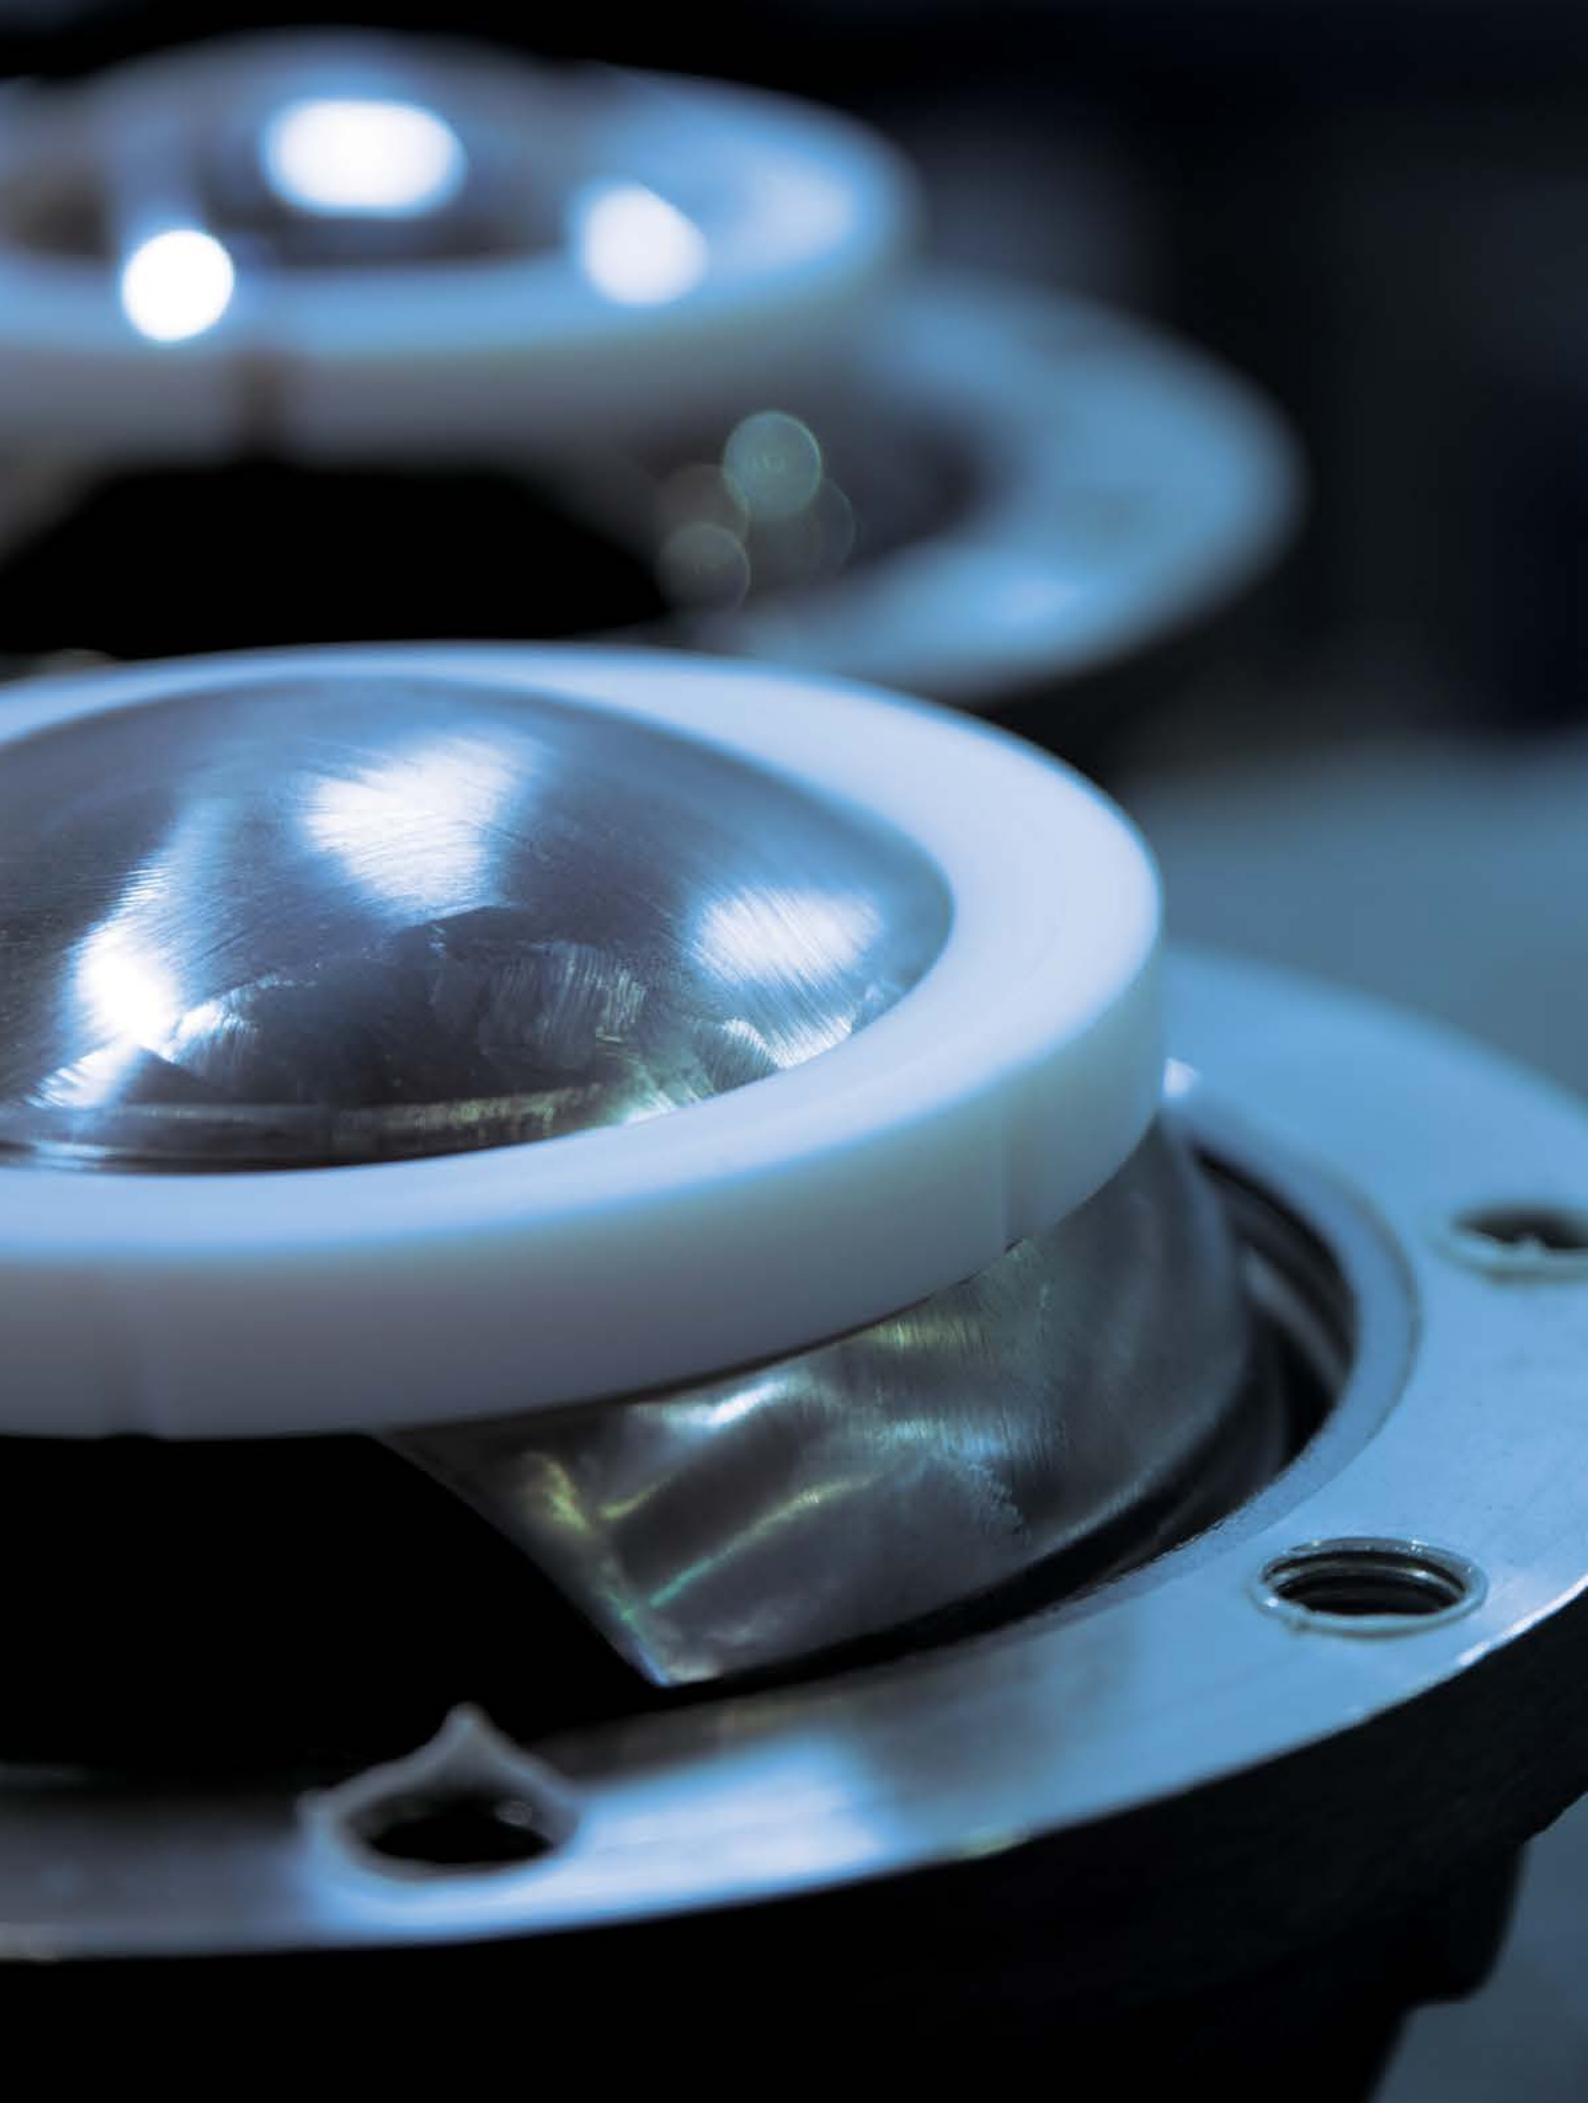



VALVES

Habonim Ball Valves	12
Valve Features	22
Cryogenic	37

HABONIM BALL VALVES

General

Habonim develops, designs, manufactures, tests, supplies and service ball valves for the global market and is globally leading in some segments of ball valve usage. With high-end products, uncompromised quality, serviceability and innovation to create solutions for the most demanding applications Habonim has gained a long track record of proven success. Habonim's ball valve product line supports extreme cold to extreme heat systems, industrial use up to very high pressures, and meets the specific needs and regulations of a wide range of industries.



Habonim ball valve product lines are subject to the company's regulation, methodologies and certification – for more information, see Habonim introduction chapter.

Design and Engineering

Habonim designs its valves with accordance to international standards and guidelines in full, partial or with reference to. For some an external certification is available:

- API 6D (number 6D-1278)
- ASME VIII Div I
- API608
- ASME B16.34
- ISO 14313
- ISO 17292
- ASME BPE (48SER)
- ISO 15848-1, API641
- Fire safe design per API 607, ISO 10497, API6FA
- Antistatic design per ISO 17292

For relevant valves, Habonim complies or use as guidelines market leading standards such as, but not limited to:

- NACE MR-0175
- NDT/DT (according to ASME B16.34)
- MSS SP-55
- Polymers per TSE/BSE, BAM, FDA, USP, CE1935:2004





Testing

Habonim refers to the following international standards for valve testing:

- API 598
- ISO 15848-2
- API6D
- EN 12266-1/2
- ISO 5208

Strength/Valve shell leak test:

- Tested per quality system procedures
- By usage of compressed air, nitrogen or water

In-Line Leak Test:

- 100% of valves are tested
- By compressed air, nitrogen or helium
- At 5-7 bar pressure
- Pass criteria:
 - Rate A result (bubble tight shutoff) for soft seated valves

Functional Test:

- 100% of valves are tested
- Torque is tested to design limits

Packing

Habonim valves are delivered as a standard as:

- Valve in open position
- Actuated valves are delivered in fail-safe position
- Ends are capped
- A firm, clean package packed by soft, clean, shock-absorbing material for transportation protection.



HABONIM BALL VALVES



Registered EU Design
015025978-0001

As a standard, most of HABONIM valves are equipped with the Total HermetiX integrity package comprised of three main elements and a superior inline sealing mechanisms in some of them:

Zero fugitive-emission no maintenance stem sealing

- Patented HermetiX® stem sealing design with zero fugitive emission sealing capability.
- Tested or certified according to ISO 15848-1 and API641 standards.
- Up to 500,000 cycles of operation.
- Field proven for millions of cycles continuous operation.

Double body sealing

- Body-to-ends & body-to-bonnet double sealing for superior sealing.
- Selection of sealing materials for diverse applications.
- Fugitive emission prevention.




Fire-safe

- According to API 607 & ISO 10497 - where applicable.
- Type-tested and certified by leading certification bodies for marine service – for some valve series.
- Clean fire-safe construction guarantees no graphite contamination of the media flow.

Superior In-line sealing

A variety of implemented mechanisms provide extended in-line sealing capabilities such as:

- Bidirectional sealing
- High pressure full Δp sealing
- High & low pressure sealing
- Others

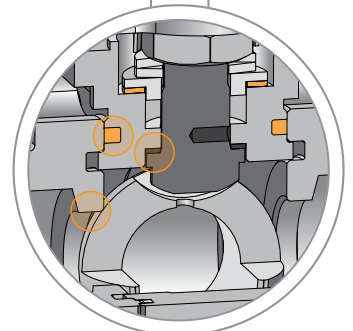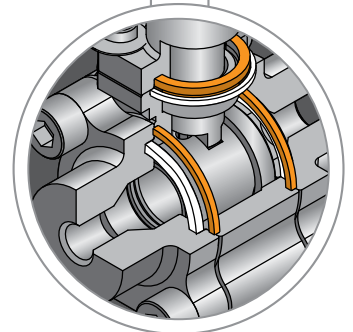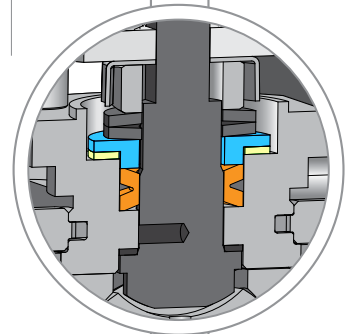




Quarter Turn Valves - Introduction

Quarter-Turn Ball Valves Design Styles

HABONIM offers ball valves in a variety of design styles and technologies that is most effectively supports a wide range of applications and use cases. We offer Floating ball style valves and Trunnion-mounted ball style valves with several construction methods.


Floating Ball Valves Design

The floating ball valve is the legacy style for ball valves, the most used and best fit for many industrial applications. The design places the valve ball between seats that holds it in place but without a firm connection to the valve body, hence, it "floats" inside the valve. Assuring a tight seal between the seats and the ball as well as the between the seats and the valve body guarantees the valve in-line sealing by a simple structure with minimal parts. As a rule of thumb, a floating ball valve should be considered as first choice wherever applicable.



Trunnion-Mounted Ball Valves

In a trunnion-mounted valve, the ball rotates only around its vertical axis while being mechanically anchored to the top and bottom of the valve body. This construction balances the torques of the rotating ball and keeps it in a lower range than with similar sized floating ball valves by tolerating the heavy loads applied to the valve trim as a result of large sizes, high pressures and dynamic temperature cycles. The seats are compressed against the ball sphere by the force of the springs and by the line pressure, providing "double block" or "double isolation" capability to the valve. Trunnion-mounted ball valves are often used for larger sizes, higher pressure ratings and dynamic temperatures.

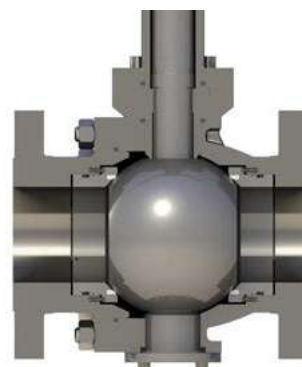

HABONIM BALL VALVES

Habonim Floating Ball Valve Designs

One-piece Design

The standard-port, one-piece, solid-cast body and flange design ensures minimum leak paths. The valve complies with ASME B16.5 for flange dimension and ASME B16.10 for Face-to-Face dimensions. The body includes an ISO 5211 integral mounting pad for easy automation. To facilitate easy assembly and maintenance, the valve is designed with one flange with a side entry that allows all inner parts to be positioned easily, and with a threaded plug that sets all parts under a precise preload with high repeatability. The result is optimum operating torque and bubble tight shut-off. It is possible to modify the ASME-standard flange connections by drilling the flanges to the EN1092 PN16 and PN40 standard. It is also possible to change one flange to a weld-end connection. A thermal jacket (steam jacket) over a one-piece design is the most efficient solution in applications where heating up the valve's outer surface (and the media inside) is mandatory to maintain media flow.

31 series | Vacuum 10^{-6} Tor; ASME B16.34 class 150 | Size ½"-8" (DN15-DN200)

32 series | Vacuum 10^{-6} Tor; ASME B16.34 class 300 | Size ½"-8" (DN15-DN200)



Two-piece Design

This unique full-port two-piece solid-cast body and flanged end design supports high flow capacity. The Habonim two-piece design is available in ASME B16.10 for Face-to-Face dimensions and ASME B16.5 class 150 and ASME class 300 flange dimensions and also in EN 1092 PN16 and PN40. The body includes an ISO 5211 integral mounting pad for easy automation. The valve is designed as a split construction which facilitates easy assembly and maintenance with standard tools. Tightening the end connector to the valve body via the body bolts preloads the complete ball-seat set, ensuring low operating valve torque, repeatability, and bubble tight shut off.

73 series | Vacuum 10^{-6} Tor; ASME B16.34 class 150 | Size ½"-8" (DN15-DN200)

74 series | Vacuum 10^{-6} Tor; ASME B16.34 class 300 | Size ½"-8" (DN15-DN200)

77 series | Vacuum 10^{-6} Tor; EN 1092 flanged PN16 | Size 3"-6" (DN80-DN150)

78 series | Vacuum 10^{-6} Tor; EN 1092 flanged PN40 | Size ½"-2½" (DN15-DN65)



Three-piece Design

The forged, cast, or rolled bar 3-piece design is comprised of a body (center section) and a variety of end connectors (thread, weld, flange) to facilitate a wide range of construction configurations. The swing-out design of the center section allows the end connector to remain a fixed part of the pipe work while the valve itself can be maintained by swinging out the center section only.

- 26 series** | Full port, solid cast | Vacuum 10^{-6} Tor
| In full compliance with ASME B16.34 class 600 | Size 2"-8" (DN50-DN200)
- 27 series** | Standard and full port, forged or rolled bar | Vacuum 10^{-6} Tor
| ASME B16.34 class 2500 (wall thickness) | Size ¼"-2" (DN8-DN50)
| ASME B16.34 class 1500 (wall thickness) | Size 2½"-8" (DN65-DN200)
| Hybrid seats technology as an option
- 28 series** | Standard & full port, forged or rolled bar, robust design, with Hybrid seats technology | Vacuum 10^{-6} Tor
| ASME B16.34 class 2500 (wall thickness) | Size ¼"-8" (DN8-DN200)
- 47 series** | Standard or full port design, forged, cast or rolled bar | Vacuum 10^{-6} Tor
| ASME B16.34 class 900 (wall thickness) | Size ¼"-2" (DN8-DN50)
| ASME B16.34 class 600 (wall thickness) | Size 2½" (DN65)
| ASME B16.34 class 400 (wall thickness) | Size 3"-6" (DN80-DN150)
- 48 series** | ASME BPE Floating Ball 3 Piece | Tube-size design, forged, cast or rolled bar
| Vacuum 10^{-6} Tor
| ASME B16.34 class 300 | Size ½"-1½" (DN15- DN40) | ASME B16.34 class 300
| Size 2"-6" (DN50- DN150)



Three-piece Threaded-Body Design

The forged, cast, or rolled bar 3-piece threaded-body design is comprised of a body (center section) and a variety of end connectors (thread, Coned & Threaded) to facilitate a wide range of construction configurations. The no-bolts design of the valve is suitable for high and very-high pressures.

- 24 series** | Standard and full port, Floating ball design, forged or rolled bar
| Vacuum 10^{-6} Tor | In full compliance with ASME B16.34 class 2,500
| Size ¼"-1½" (DN8-DN40)
- 25 series** | Forged or rolled bar | Floating ball design | Vacuum 10^{-6} Tor
| In full compliance with ASME B16.34 for 550 bar (8,000psi)
| Size ¼"-1½" (DN8-DN40)
- 29 series** | Forged or rolled bar | Floating ball design | Vacuum 10^{-6} Tor
| In full compliance with ASME B16.34 for 1,034bar (15,000psi)
| Size ¼"-1½" (DN8-DN40)



HABONIM BALL VALVES

Habonim Floating Ball Valve Designs

Multiport valves


Multiport valves are primarily used to simplify pipe and valve systems by replacing multiple two-way valves with a single multiport valve. They minimize dead legs, optimize drainability, simplify system validation and have a reduced envelope profile for easier installation. Multiport valves allow piping and machine engineers to design a simpler system that saves space and has fewer flow elements and leak paths. One multiport valve can replace multiple two-way valves and automation devices, and provides safe and easy changeover and flow shutoff, all within a confined space. Reducing the quantity of piping and fittings also means faster and more cost-effective construction. Available in a variety of flow patterns and directions and in both automatic and manual configurations, the design possibilities offered by the multiport valve are virtually unlimited.

- 61 series**
 - | Multiport with three horizontal ports
 - | Standard or full port design, forged or cast
 - | Vacuum 10^{-6} Tor
 - | ASME B16.34 class 600 (wall thickness) | Size ¼"-1½" (DN8-DN40)
 - | ASME B16.34 class 300 | Size 2"-4" (DN50-DN100)
- 62 series**
 - | Multiport with four horizontal ports
 - | Standard or full port design, forged or cast
 - | Vacuum 10^{-6} Tor
 - | ASME B16.34 class 600 (wall thickness) | Size ¼"-1½" (DN8-DN40)
 - | ASME B16.34 class 300 | Size 2"-4" (DN50-DN100)



Diverter valves

Diverter valves are primarily used to split or combine process flows, or to switch medium among different pieces of process equipment such as pumps, filters, or whole pipelines. Diverter valves provide reliable high flow rates in the most severe operating conditions, including vacuum conditions. They can also handle highly viscous media without the need for constant back-flushing. The diverter valves are available with different ball designs to accommodate a wide range of flow patterns. These flexible flow combinations reduce the number of valves in a system, thereby saving costs and facilitating easier control. Because all of the diverter valves have the same body Face-to-Face dimensions, they can be used with all standard end connections.

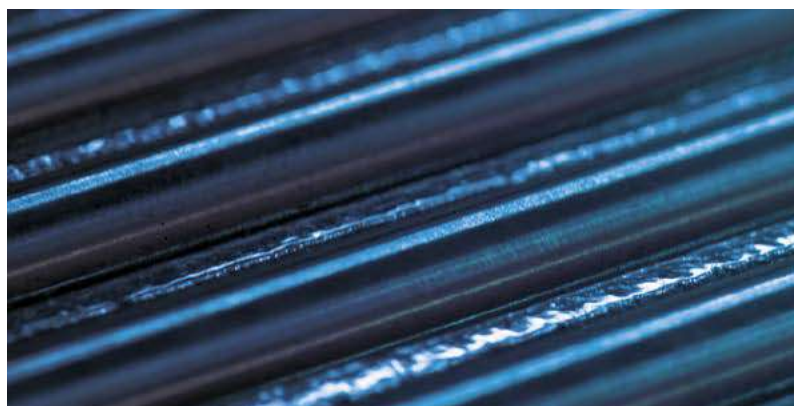



D31 series | Bottom entry diverter
 | Standard port design, cast | Vacuum 10^{-6} Tor
 | ASME B16.34 class 150 (wall thickness) | Size ½"-8" (DN15-DN200)

S31 series | Side entry diverter
 | Standard port design, cast | Vacuum 10^{-6} Tor
 | ASME B16.34 class 150 (wall thickness) | Size ½"-8" (DN15-DN200)

D32 series | Bottom entry diverter
 | Standard port design, cast | Vacuum 10^{-6} Tor
 | ASME B16.34 class 300 (wall thickness) | Size ½"-8" (DN15-DN200)


S32 series | Side entry diverter
 | Standard port design, cast | Vacuum 10^{-6} Tor
 | ASME B16.34 class 300 (wall thickness) | Size ½"-8" (DN15-DN200)

D47 series | Bottom entry diverter
 | Standard or full port design, forged or cast | Vacuum 10^{-6} Tor
 | ASME B16.34 class 600 (wall thickness) | Size ¼"-2½" (DN8-DN65)
 | ASME B16.34 class 300 (wall thickness) | Size 3"-6" (DN80-DN150)

S47 series | Side entry diverter
 | Standard or full port design, forged or cast | Vacuum 10^{-6} Tor
 | ASME B16.34 class 600 (wall thickness) | Size ½"-2½" (DN15-DN65)
 | ASME B16.34 class 300 (wall thickness) | Size 3"-6" (DN80-DN150)

D61 series | Multiport with three horizontal ports
 | Additional bottom port available
 | Standard or full port design, forged or cast
 | Vacuum 10^{-6} Tor
 | ASME B16.34 class 600 (wall thickness) | Size -1" (DN8-DN40)
 | ASME B16.34 class 300 | Size 2"-4" (DN50-DN100)

D62 series | Multiport with four horizontal ports
 | Additional bottom port available
 | Standard or full port design, forged or cast
 | Vacuum 10^{-6} Tor
 | ASME B16.34 class 600 (wall thickness) | Size -1" (DN8-DN40)
 | ASME B16.34 class 300 | Size 2"-4" (DN50-DN100)

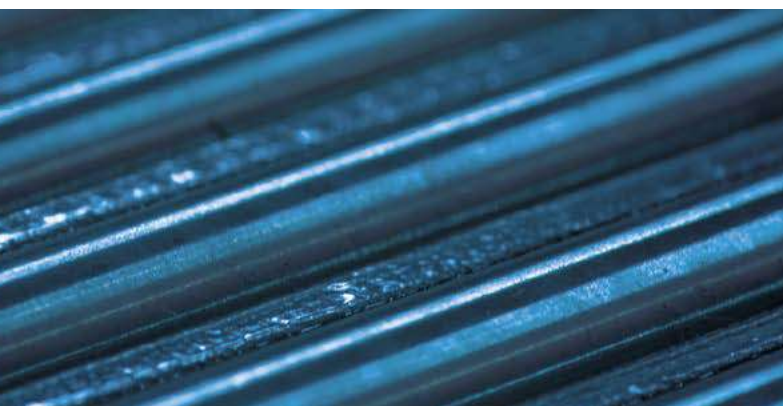

HABONIM BALL VALVES

Habonim Trunnion-Mounted Ball Valve Designs

Features:

- Specially designed to endure the harsh conditions of the oil & gas, petrochemical and other demanding applications
- Underground, above ground, offshore and onshore installation
- Full differential pressure (Δp) per the valve pressure rating
- Manually applies a maximum operating force of 360N (80 lbf)
- Double block & bleed single valve capability
- Seats preloaded by helical springs
- Antistatic grounding between ball, stem & body as standard
- Bi-directional flow
- Double Piston Effect (DPE) and Single Piston Effect (SPE) designs are both available
- Optional additions for 8" valve size and above:
 - Injection fittings for emergency stem or seat sealant & lubrication maintenance
 - Equipped with lifting lugs
 - Manually operated via gearbox
- Buttweld end valves may be supplied with extended spool pieces (PUPS) to avoid any risk of seat and seal damage during welding and post weld heat treatment operations

External finishing:

- Austenitic stainless steel valves are delivered in their natural finish
- Carbon steel valves are sandblasted and externally coated with paint
- Other painting systems are available upon request

One-Piece Design

52 series | Cryogenic Top Entry Trunnion Mounted
| Size 1½"-6" (DN40-DN150) | Class 300





Two-Piece Design

The 2-piece cast trunnion-mounted ball valve designs are cost effectively support pressure ratings up to ASME Class 600, serving as the first choice where applicable with ANSI flange ends.

- 81 series** | Full Port | Vacuum 10^{-6} Tor
| ASME B16.34 class 150 (wall thickness) | Size 2"-16" (DN50-DN400)
- 82 series** | Full Port | Vacuum 10^{-6} Tor
| ASME B16.34 class 300 (wall thickness) | Size 2"-16" (DN50-DN400)
- 83 series** | Full Port | Vacuum 10^{-6} Tor
| ASME B16.34 class 600 (wall thickness) | Size 2"-16" (DN50-DN400)

Three-Piece Design

The 3-piece forged body and end design is a robust heavy-duty design for pressure ratings up to ASME Class 2500 With ANSI flange, DIN flange or weld ends.

- 91 series** | Full & Standard Port | Vacuum 10^{-6} Tor
| ASME B16.34 class 150 (wall thickness) | Size 2"-16" (DN50-DN400)
- 92 series** | Full & Standard Port | Vacuum 10^{-6} Tor
| ASME B16.34 class 300 (wall thickness) | Size 2"-16" (DN50-DN400)
- 93 series** | Full & Standard Port | Vacuum 10^{-6} Tor
| ASME B16.34 class 600 (wall thickness) | Size 2"-16" (DN50-DN400)
- 94 series** | Full & Standard Port | Vacuum 10^{-6} Tor
| ASME B16.34 class 900 (wall thickness) | Size 2"-16" (DN50-DN400)
- 95 series** | Full & Standard Port | Vacuum 10^{-6} Tor
| ASME B16.34 class 1500 (wall thickness) | Size 2"-12" (DN50-DN300)
- 96 series** | Full & Standard Port | Vacuum 10^{-6} Tor
| ASME B16.34 class 2500 (wall thickness) | Size 2"-12" (DN50-DN300)

Three-Piece Threaded Body Design

- 99 series** | forged or rolled bar | Trunnion ball design | Vacuum 10^{-6} Tor
| In full compliance with ASME B16.34 for 1,034 bar (15,000psi)
| Size 1/4"-1" (DN8-DN25)



VALVE FEATURES

Fire Safe Design

Valves to be used in explosive or fire-hazard areas need to be (according to some standards and regulations) be designed to prevent in-line leaks for at least 30 minutes when exposed to flames and/or temperatures between 900 - 1000°C. In addition, after cooling down, a fire-safe valve has to be able to be cycled once and seal at an acceptable level of in-line leakage.


Habonim fire-safe valves include body seals fabricated from graphite, which is well-known as a fire-retardant material. In the event of fire, the valve's soft seats melt and the ball is pressed against a metallic fire lip on the downstream end connector thus preventing in-line leakage. The fire also burns off the stem's thrust seal, causing the stem, which has a machined chamfer at its root, to be pushed up and form a metal-to-metal seal with the valve body and prevent leakage. For stem sealing Habonim is using the patented HermetiX seal, a unique polymer-based graphite-free stem seal that, even after its polymer materials have melted, allows the stem to stay aligned and fully operable after cool-down. During normal operation, our polymer-based stem seal allows 500,000 operation cycles without maintenance, making it remarkably more durable than porous graphite seals, which have to undergo maintenance every 5,000 cycles without refurbishment. This design has been tested and certified to API 607 and ISO 10497 standards.

Tongue & Groove Body Seal Design

A 'tongue' machined on one side of the valve body and a matching 'groove' machined on the opposite side provides a perfect interlock system that precisely aligns the body and ends along the valve's center axis, thus increasing accuracy and repeatability during valve assembly and maintenance. The tongue & groove design is used most of our fire valves so that the expanded body seal is fully encapsulated and compressed in the event of a fire. The tongue & groove design forces fluid emissions to flow in a labyrinth pattern, thus ensuring zero leakage into the atmosphere.

Body Bolts

Instead of long through-way bolts and nuts, all of our 3-piece fire-safe valves use double the number of one-size-up short bolts threaded into the body. In the event of fire these bolts minimize thermal expansion and prevent external leakage.

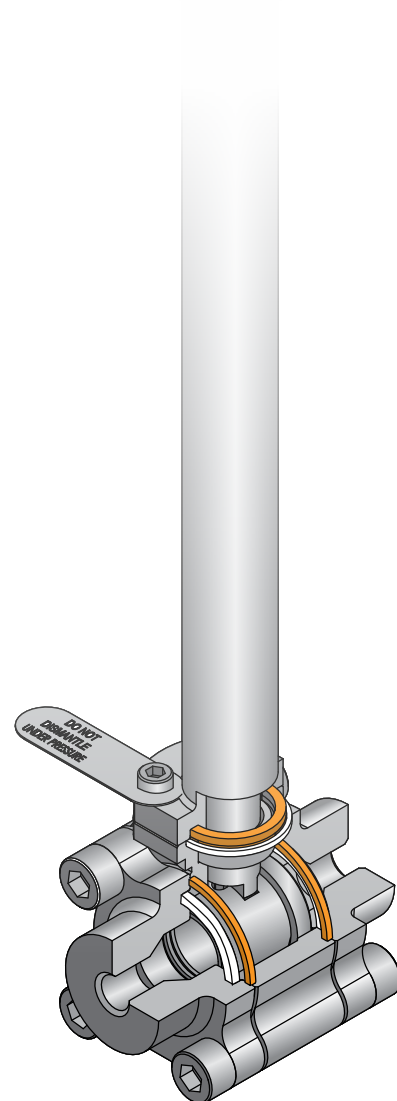



Ball Configurations

Our mirror-polished solid balls ensure tight shutoff and long service life. All balls come with specially rounded leading edges to eliminate excessive seat wear during rotation. Our balls technology can supports change to variety of metals (some are available only upon request) such as Stainless Steel 316 (CF8M), Alloy-C276, Alloy-C22, Monel 400, 254SMO, Duplex, Super Duplex, Inconel 625, Titanium and more. Ball materials other than Stainless Steel 316 (CF8M), are marked for clear identification.

There are different styles related to the ball port itself:

- Standard port ball (also known as reduced port) - The flow through the ball is one size smaller than the pipe's size resulting in a flow area smaller than the pipe's area. The reduced flow area increases the flow velocity (assuming a constant flow discharge) and the head-loss over the valve.
- Full port ball - Has an over-sized ball so that the ball's port is the same as the pipe's inner diameter, thus reducing friction loss. Flow is unrestricted but the valve is larger so full-port balls are typically used where free flow is particularly important such as in pipelines that require pigging.
- Tube size ball (also known as true port) has a port which is identical to the tube's inside diameter. This configuration is used mainly in the pharmaceutical industry where dead legs and pockets of contamination are unacceptable.

Pressure Equalizing Hole

Balls typically have a hole in the stem slot to equalize the pressure over the ball sphere. The pressure inside the ball port and the pressure in the valve cavity are identical and hence no stress is applied to the ball sphere. The pressure equalizing hole is eliminated in the following cases:

- High surface finish requirements, mechanically polished or electro-polished
- Diverter valves
- Valves with cavity filler seats
- Double block and bleed valves
- Pharmaceutical or other applications with very high sanitary requirements



Minimum stress on the ball by adding a pressure equalizing hole



VALVE FEATURES

Ball Configurations

Cavity Pressure Relief

This safety feature is for valve applications where a trapped cavity must be avoided a 3 mm hole is included in the upstream ball sphere so that any pressure that builds up in the valve cavity will be released into the upstream pipeline. The use of a cavity pressure relief hole feature is mandatory when using ammonia, chlorine or any other liquid media that is at risk of transforming into a gas and thus elevating the pressure within the valve cavity in an uncontrolled manner. A valve which includes the 'P250' code will always be unidirectional, and will include an arrow flow plate attached to the valve body. Improper installation in the opposite direction will cause an in-line leak.



3 mm relief hole
face the upstream

'C' Ball

Habonim offers a two-way ball with its upstream sphere completely machined through the ball port and thus has a C shape. This feature is mainly used where media tends to crystalize on the upstream ball sphere such as, for example, molten sugar or baked ground coffee. When a standard valve is in the closed position and a solid layer has adhered to the ball's upstream sphere, subsequent valve operation will erode the upstream soft seat, loosen the pre-load of the ball seats set, and rapidly degrade the valve's functionality. With a 'C' ball media solidification is impossible as there is no surface area on which the media can accumulate. The upstream seat withstands the media unscratched; the pre-load of the ball seat set as well as the functionality of the valve remain intact for a longer period of time.



Upstream sphere completely
machined in a 'C' ball

Multiport and Diverter Ball

Multiport and diverter ball designs are used primarily to split or combine process flows or to switch medium between alternative pieces of process equipment. The diverter ball configuration can be either bottom entry or side entry. The diverter ball has the same sphere diameter as standard 2-way balls so the same soft parts can be used. Multiport balls have numerous flow configurations, which are described in detail in the Multiport chapter of this catalog. The multiport ball has a larger sphere diameter than a diverter ball, allowing a firm grip of four seats vs. two seats in the diverter configuration.



Diverter ball with isometric
T port construction

V-Ball

The V ball is used in control valve solution for less demanding applications, such as clear liquid at a maximum pressure drop of 6 bar (87 psi), or clean gas at a maximum pressure drop of 10 bar (145 psi), and maximum temperatures of 120-°C (248-°F) for both. The V ball design is comprised of a floating characterized ball, mounted between two seats, which maintain a trim preload and bubble-tight shut-off and low torque demand. V-Balls come in a variety of 'V' and 'slot' shapes, and can be custom designed to meet any control requirement. The V-Ball is available in a wide range of high-alloy materials and coatings for highly corrosive applications.




Characterized ball for flow
control applications



Downstream Pressure Relief Ball


Habonim ball downstream pressure relief is designed with a diagonal hole in the downstream sphere toward the bottom of the ball. In the open position the flow runs smoothly through the valve. When the valve is closed the downstream pressure is vented through the diagonal tunnel and out via a third port incorporated into the valve body so that the relieved pressure can be diverted safely to a secured area. This feature is mainly used for pressure gauges and instrumentation service. This design eliminates the need to install an additional downstream pressure vent valve.



Special diagonal tunnel vents downstream pressure when the valve is closed.

CIP/SIP

Habonim 'CIP' ball code is mainly used in sanitary and biopharm applications. In clean applications the main ball valve problem is contamination caused by impurities trapped in the cavity between the ball's outer sphere and the valve body's inside diameter. To overcome this problem Habonim has designed a special ball that allows the stream to clean the valve cavity thoroughly during the CIP/SIP process, with the valve in the full open position. The bottom line: Bidirectional and streamlined flow with a high Cv, and self-cleaning of hidden cavities.



With the valve in the open position, special tunnels flush the valve cavity constantly



VALVE FEATURES

Seat Configurations

Standard Seat

A flexible, precision-machined seat that provides the highest seal capabilities (EN12567 Rate A) in high pressure and vacuum conditions. Its unique design reduces valve torque, facilitating a more compact, lower-weight automated package. The design also reduces wear, thus extending the life of the seat. The seat perimeter has pressure-equalizing slots to allow pressure to penetrate into the body cavity for better sealing and for avoiding upstream seat collapse into the valve cavity while turning the valve ball from the open to closed position under high differential pressure.



Standard seat

Self-Relieving-Seat (SRS)

The Self Relieving Seat (SRS) is used mainly in syltherm and dowtherm services in the chemical and biopharm industries. Both syltherm and dowtherm have a high thermal expansion coefficient and in trapped cavities (such as when the valve ball is in its closed position) even a moderate temperature increase will cause dramatic pressure build-up that can cause cessation of valve operation, seat swelling, and even valve shell failure. The SRS is designed to flex and allow the trapped pressure to escape into the pipeline, while shutting off as soon as the peak pressure is relieved. The pressure relief is achieved by a special internal groove that is machined into the seat radii facing the ball. Additional radial grooves enable the pressure to bypass the ball and access the internal groove. The seat sealing surface is in the central internal section and provides tight shutoff. The outer section of the seat above the internal groove gives the support needed to the ball when higher line pressure pushes the ball toward the downstream seat, thus preventing "crushing" of the seat. SRS seats can be used with a differential pressure up to ASME Class #300.



Self-Relieving-Seat (SRS)

Seat-seal

In some use cases valve must seal the pressure at the upstream side, which contradicts the traditional floating ball mode of operation (where sealing is typically done on the downstream seat only). Habonim's solid one-piece seat-seal design blocks the flow through the back of the seat, generating an upstream seal. Seat-seal can be used with differential pressure up to ASME Class300. For higher differential pressures use either a valve with hybrid seats, or a dual floating ball valve integrated into a one block or trunnion mounted valve.



Seat-seal

Hybrid Seat

When a soft seated floating ball valve is held even momentarily at mid position, the upstream seat is only partially supported by the ball and can be pushed towards the valve cavity by the force of the stream. This deformation is amplified with increased media density, high differential pressure and/or high velocity. Under these extreme conditions the deformation can: cause the ball to grip the unsupported area of the soft seat and jam the valve; slice the seat by the port edge of the ball; or trigger stem twisting (caused by excessive torque applied by the operator trying to close the valve). Habonim's line of Hybrid seats were developed especially to overcome the problems posed by high differential pressure applications. The combination of a metallic housing and polymer insert offers the stiffness of a metal seat with the bubble tight shutoff leakage rate and operating torque of a soft seat. Different hybrid seat designs were developed to meet the needs of different applications, and are designated by the metallic housing design.



Hybrid seat



Seat Configurations

Cavity filler seat

The cavity filler seat design minimizes crevices and gaps between the ball and the valve body, thus reducing the risk of trapped contaminants. Because the valve body is specially machined with a larger bore diameter to fit the special cavity filler seat dimensions, they cannot be retrofit into a standard valve body. The cavity filler seat is a one piece seat-seal design and is therefore suitable for use with the Habonim 3-piece product line.

Note: A valve with a cavity filler seat cannot be used in fire-safe service.



Cavity filler seat

Metal seat

Habonim metal seats are used for extreme service applications where high temperature, abrasion and/or corrosion restrict the use of soft seats. The metal seats are mated with the ball for enhanced engagement and sealing. A variety of surface treatments and coatings can be applied to the seat's outer surface to withstand corrosion, galling and other forms of wear.



Metal seat

V-port seat

Superior control performance and accuracy is designed into the geometry of the downstream V-port. The precision wire cut 'V' shape of a metal seat, enables equal percentage flow characteristics, while S-port design ('Slot') provides linear flow characteristics. V-Port valve assembly, comprised of a ball and wire cut metal seat, lapped together into a single seamless component. V-port design provides the high rangeability and precision throttling required for clean or dirty liquids and gases, as well as fibrous suspension applications. The streamlined flow passage allows for high recovery, maximum efficiency and excellent erosion resistance.



V-port seat




VALVE FEATURES

Stem Design


A crucial component in a quarter-turn ball valve is the stem, which transfers the torque from the operator to rotate the ball and control its movement. The stem geometry and surface finish is crucial to minimize stem leak and maximize ease of operation. The stem is a dynamic element and, in most cases, is the only element that protrudes from the pressure vessel and is thus subject to safety issues as well. Habonim's robust stem design complies with ASME B16.34 and API 6D and can endure at least twice the valve's nominal torque. To solve a major safety issue, the stem is designed to be "blowout-proof". Because it is inserted into the valve body from within, the stem will not release under pressure. All Habonim stems are, by default, fire-safe design. A special chamfer is machined at the root of the stem so that, in the event of fire, the stem is pushed upwards and seals against the valve body - metal to metal engagement. Various stem materials are available, from austenitic stainless steel to nickel alloys, to titanium for light and moderate torque requirements, and for high cycle applications or high torque demands. The stem top planes for valve sizes ½" (DN15) up to 2½" (DN65) are typically a Double-D shape, while 3" (DN80) stems and above typically have a square shaft (although a Double-D stem can be provided upon request by adding the 'WR' suffix to the valve description).

Anti-Static Design

An anti-static device provides for electrical continuity between the body, ball and shaft of the valve and is used to discharge static electricity buildup on electrically isolated balls. According to the EN ISO 17292 standard, all valves with a size up to 2" (DN ≤ 50) require a stem/body contact, while larger valve sizes also require a ball/stem contact. The anti-static feature shall have electrical continuity across the discharge path with a resistance not exceeding 10 Ω from a power source not exceeding 12 VDC when type tested on a new, dry, as-built valve after pressure testing and cycling of the valve at least five times. The Habonim anti-static device, in which contact is made via a spring loaded stainless steel element, complies with EN ISO 17292 and is, in fact, built-in to all Habonim valve product lines, without exception.

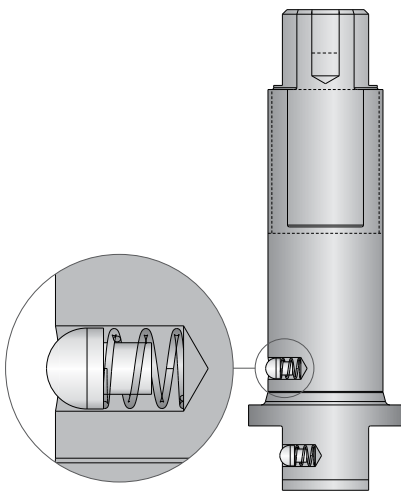

Anti-static design

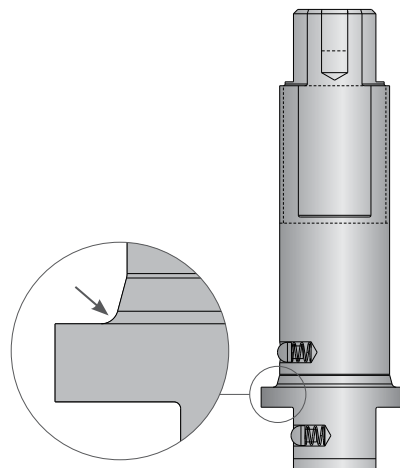

Stem design




Stem Seals

The valve trim - and the valve stem seal design in particular - determine the quality of a valve. The stem seal must perform two tasks: keep the media within the boundaries of the pressure vessel, and allow uninterrupted leak-free continuous open/closed quarter-turn rotation.

Unlike the valve body's static seal, the stem seal is subject to dynamic operation of the valve, as well as to side loads resulting from actuator misalignment or from the operator forcing the handle incorrectly. The valve trim typically comprises two Belleville springs assembled Face-to-Face, which preload the stem seal. This self-adjusting mechanism compensates for wear and pressure/temperature differentials - ensuring a leak-tight seal and extended service life. Habonim's trim design for heavy-duty service, such as high cycle applications, uses four or even six sets of Belleville springs so as to maintain preload over a longer operational cycle life. The Belleville springs are compressed by the stem nut, which is locked to prevent unintentional release during cycles.

Habonim's stem seal design, consisting of a live-loaded thrust bearing and anti-abrasion ring combined with a stem seal, significantly increases valve cycle life over conventional ball valves and extends the time between adjustments.

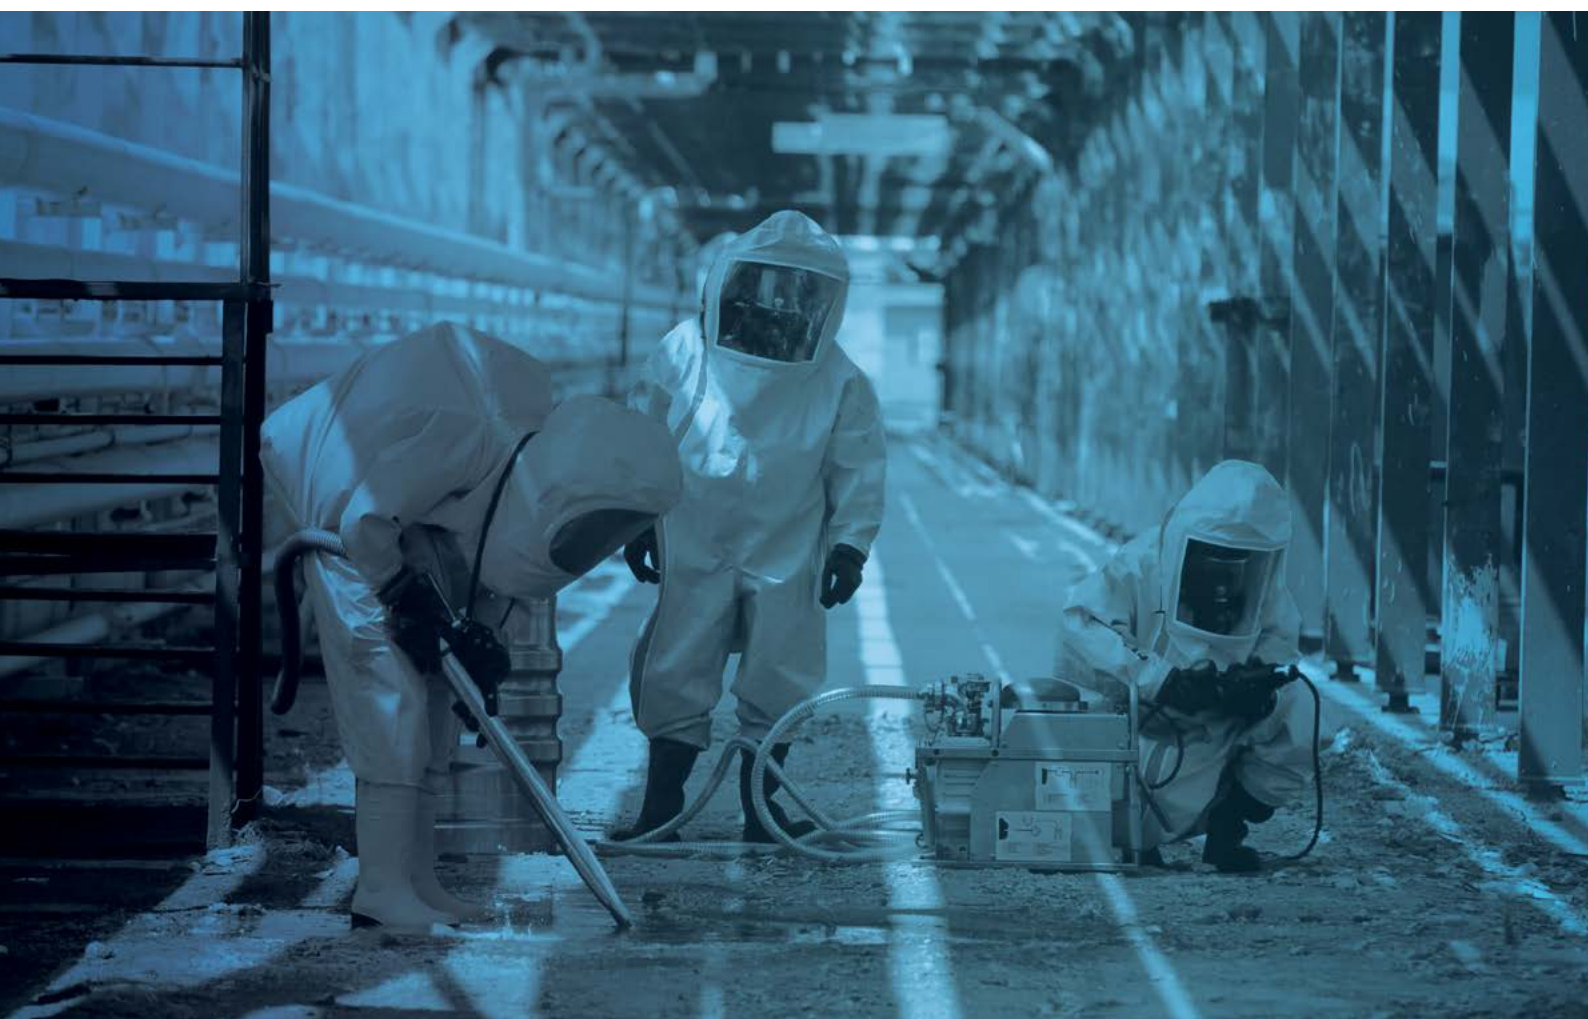

VALVE FEATURES

Stem Seals




Graphite-free fire safe HermetiX® stem seal

The patented HermetiX® stem seal is named for its distinctive "X"-shaped design. The flexible "X" shape creates a dynamic sealing arrangement so that, in the event of pressure buildup or side load, the HermetiX® adjusts dynamically to prevent fugitive emissions. The result is a superior stem seal design compared with the conventional flat stem seals currently available on the market.

The HermetiX® Fire-safe. This patented design includes a polymer based stem seal and a unique fire safe certified construction. The graphite-free stem seal, suitable for use in hazardous industries such as chemical, petrochemical, oil & gas, Food & Beverages is designed to operate for 500,000 cycles without refurbishment. The HermetiX® fire safe valve offers the ultimate solution - an exclusive graphite free stem seal that eliminates the risk of graphite disintegration after prolonged valve cycles, protecting both line materials and air quality. The HermetiX® fire safe valve meets the requirements of fire-safe API 607 / ISO 10497 standards, as well as the stringent ISO 15848-1 standard.

Features

- Prevents media contamination from graphite particles
- FDA, CE1935:2004 approved polymer or other materials is available upon request
- Fugitive emission certified to ISO 15848-1 and API 641
- Habonim patented design
- Designed to operate for 500,000 cycles without refurbishment
- Prevents media contamination from graphite particles
- Ensures uninterrupted production
- Increases site safety
- Anti-static as standard

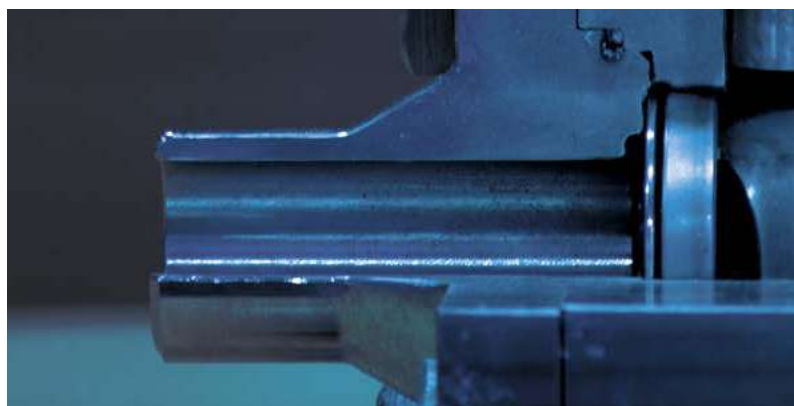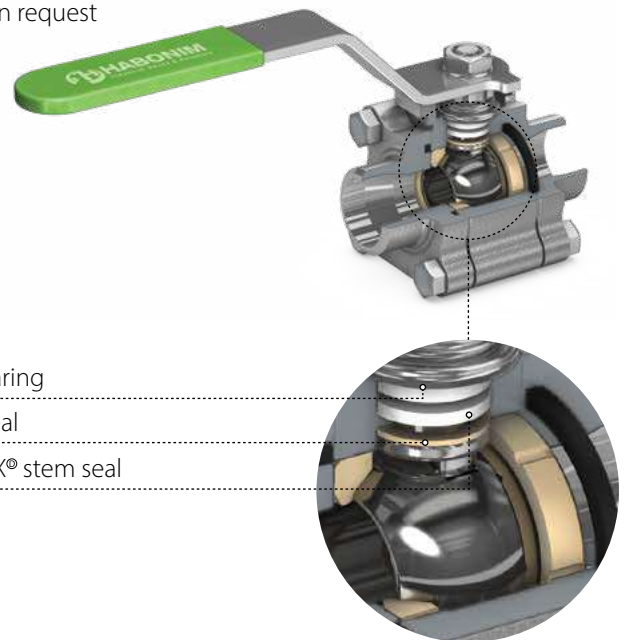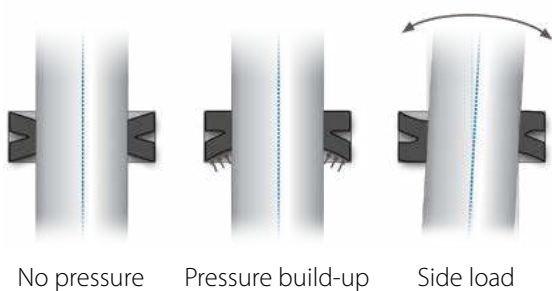





High Cycle (HC) Stem seal

High cycle service is defined by Habonim engineering as continuous operation for more than one hour at a frequency greater than 1 cycle / 180 seconds.

When designing a valve for high cycle service parameters, such as heat dissipation due to friction of metallic and plastic parts, resistance to fatigue stress, and mean time between maintenance activities must be taken into consideration.

For high cycle applications Habonim recommends the use of valve stems made of high tensile material. The stem will be polished for a high degree of surface roughness. The stem thrust seal will always be made from highly wear-resistant plastic material. A Viton O-ring is inserted into a customized follower. The complete trim assembly is preloaded by a double or even triple Belleville spring stack. All of these design features give the valve a particularly long service life.

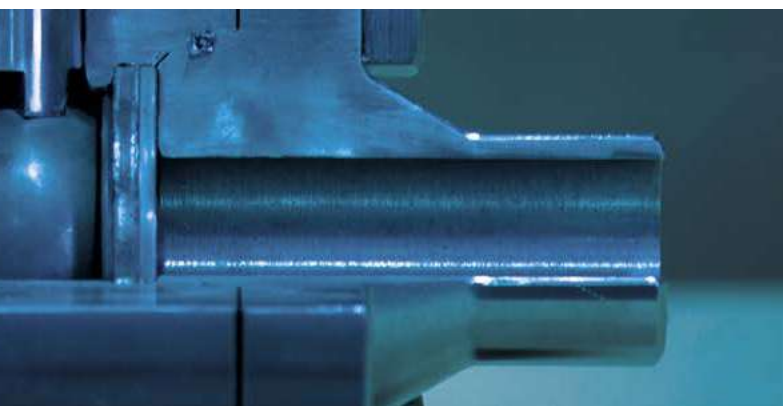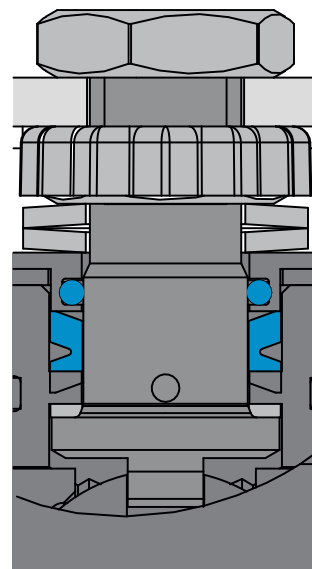

VALVE FEATURES

End Connections

Habonim offers a variety of end connections for its 3-piece valves, supporting the industry standard connections for piping in diverse applications and geographies.

BW

Buttweld end for various pipe schedule - designed to ASME B16.25, EN12627-4, BW code stands for buttweld schedule 40, for different pipe schedule BW should be followed by the relevant schedule number (5,10,80,160)



TC/TCI/TCD

Tri-Clamp end - designed to ASME BPE (TC) standard, allows fast connection or removal of the valve from the line. Mainly used in the pharmaceutical and food & beverage industries.



SW

Socket-weld end one piece solid cast designed to ASME B16.11 and EN 12760. Leaving a 1 mm gap (average) between the pipe end and the socket inner plan is a common welding practice to avoid internal stress due to thermal expansion during the welding process



XBW

Extended buttweld end for various pipe schedule - one piece solid cast - special design for in-line welding save labor cost and keep the integrity of the product factory tested.



XSW

Extended Socket-weld end one piece solid cast - special design for in-line welding save labor cost and keep the integrity of the product 'factory tested'



BWO / BWI / BWD

Buttweld end for various tube standards - designed to ASME BPE (BWO), ISO 1127 (BWI) and DIN 11850 (BWD). The length of this end doesn't allow the use of orbital welding.



ETO / ETI / ETD

Extended buttweld end for various tube standards - designed to ASME BPE (ETO), ISO 1127 (ETI) and DIN 11850 (ETD). One piece solid cast with sufficient length to allow the use of orbital welding. Habonim ETD end connections are designed in accordance to EN10357 – Series A.

Habonim ETI end connections are designed in accordance to EN10357 – Series C.

Dimensions of the end-connections tube ends are suitable to be welded on tubes that meet this standard.

For other tube sized ends please contact a Habonim representative.



Standard	Sizes	Wall thickness (mm)	End Connection (19-22)	End Connection Length
ISO 1127	3/8"-3/4"	1.6	BW1.6	Short
			ET1.6	Extended
	1"-2 1/2"	2.0	BW2.0	Short
			ET2.0	Extended
	Over 2 1/2"	2.3	BW2.3	Short
			ET2.3	Extended




CTM

Coned and Threaded type female connection to be used with Coned & Threaded medium-pressure tubing and connection components.

Female connection geometry and sizes per the Below.

Size	Dimensions - mm (inches)					
	A	B	C	D	F	H
02	9.9(25/64)	7/16-20	7.1(.28)	12.7(.28)	4.8(.19)	2.8(.109)
03	13.1(33/64)	9/16-18	9.6(.38)	9.6(.38)	7.9(.31)	5.2(.203)
06	19.1(3/4)	13/16-16	11.1(.44)	11.1(.44)	12.7(.50)	9.1(.359)
07	32.9(1.19/64)	3/4-14	12.7(.50)	12.7(.50)	16 (.63)	11.1(.438)
10	45.47(1.79)	13/8-12	20.6(.81)	20.6(.81)	22.4(.88)	14.3(.562)



NPT / BSPT / DIN2999 / DIN3852

Female thread end designed to ASME B1.20.1 NPT
EN 10226-1 BSPT/DIN2999/DIN3852 and more



LL / LM

Compression ends for metric (code LM followed by the tube OD in mm) or imperial (code LL) tube dimensions. mainly used in instrumentation services, with sizes up to 1" (DN25)



Flanged			
150	ASME B16.5 #150 RF	PN16	EN1092 PN16 RF
300	ASME B16.5 #300 RF	PN40	EN1092 PN40 RF
600	ASME B16.5 #600 RF	PN63	EN1092 PN63 RF
900	ASME B16.5 #900 RF	PN100	EN1092 PN100 RF
		PN160	EN1092 PN160 RF

150/300/600/900 | PN16/40/63/100/160

Raised Face flange ends designed to ASME B16.5 or EN1092 for a variety of pressure classes.

Valve Face To Face sizes are per Habonim catalog data only.



MNPT / MBSPT

Male thread end designed to ASME B1.20.1 NPT
EN 10226-1 BSPT/DIN2999/DIN3852 and more



Grayloc®


Grayloc® compatible hub designed to fit an opposite hub for an easy low or high pressure connection Using a self-energized seal (Grayloc® is a registered trademark of Grayloc Products, L.L.C.)



VALVE FEATURES


Handles

A valve handle is the interface between the operator's hand and the valve trim. Habonim's handles are designed for safe operation, with a firm and comfortable grip. To facilitate ease of operation, the handle length ensures that the maximum force required at the handle-end to apply the breakaway torque will never exceed 360 N (80 lbf). The handles are manufactured in a variety of technologies: casting, forging, punching, and laser cut and welding. The standard materials are zinc plated carbon steel and stainless steel. Habonim's range of handle designs addresses the diverse needs of multiple applications.




The 'SHARK' handle

Habonim's standard handle for valves with an ISO 5211 top pad.

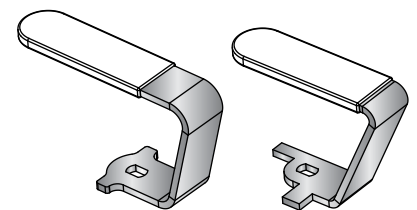


The 'SCORPION' handle

Habonim's special handle for confined spaces. There are two types to accommodate valves with or without an ISO 5211 top pad. To specify a valve with the SCORPION handle add the '-SCRP' suffix to the valve code.



The 'POINTER' handle


Habonim's standard handle for valves without an ISO5211 top pad.

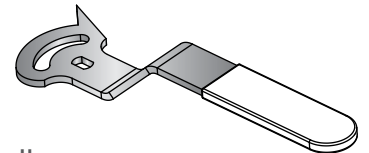

The 'ADJUSTABLE' handle

Habonim's special handle for manually controlled valves. It is supplied as part of a kit that includes a lock-in-place mechanism and a mirror-polished scale for clear identification of the valve's angular position. To specify a valve with the ADJUSTABLE handle add the '-ADJ' suffix to the valve code.





The T-Handle (TH)

Habonim's special handle designed for trailers with its compact footprint and lockable option. Available in the following Habonim high-pressure TPED certified series: 24, H24, H25 and H29.


The rod can be moved from side to side to increase leverage for a better user interface experience.

To specify a valve with the T-Handle, add the '-TH' suffix to the valve code.




The Oval handle (OVL)

Habonim's special handle designed to avoid unintentional movement of the valve handle. It is also used in confined spaces where the handle must not protrude beyond the valve's Face-to-Face plate. To specify a valve with the OVAL handle add the '-OVL' suffix to the valve code.



The Spring Return Handle (SRH)

An extra thick handle design to withstand the severe impact during valve closing. This handle is part of the SRH unit.

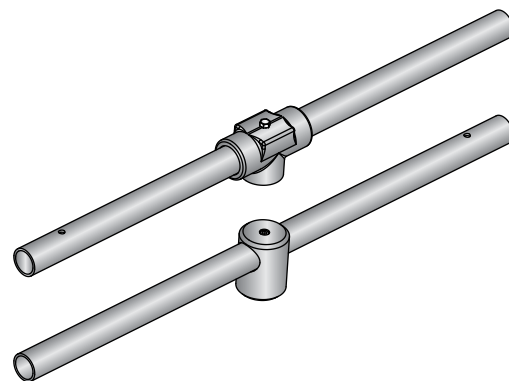

Habonim's standard handle for large valves (2½" and above)

Habonim's standard handle for large (2½" and above) cryogenic, high pressure and metal-seated valves, and for large (3" and above) standard valves. It provides a firm grip and smooth operation. The maximum force required at the handle-end to apply the breakaway torque shall not exceed 360 N (80 lbf). Habonim supplies valves with 2½" standard port and above for manual operation with handles attached to or packed with the valve. (with the exemption of 47 series which is for 3" standard port and above). If the valve is to be automatically actuated, Habonim removes the handle and prepares the valve stem seal accordingly. To specify a valve prepared for automated actuation, add the '-BS' (bare shaft) suffix to the valve code. The '-BS' suffix does not apply to valves size up to and including 2.







CRYOGENIC VALVES

General 38

Trunnion

Top Entry 43

3 Piece 47

2 Piece 57

Floating Ball

3 Piece 65

High Pressure | 3 Piece 83

Diverter/Multiport 91

Flanged 121



CRYOGENIC VALVES

General



Habonim's cryogenic product line valves are subject to the general Habonim valves design, materials, practices, methodologies and certifications – for more information, see Valves General chapter.



Habonim Cryogenic valves are equipped with the Total HermetiX integrity package for superior sealing, safety and environmental care.

Cleaning, Assembling and Packing

Cryogenic Service

A meticulous cleaning and assembly procedure eliminate the ignition hazards that can be caused by the presence of hydrocarbon oil, grease, and metal chips. Habonim uses an environment friendly, alkaline-based degreasing process with controlled parameters. Valves are assembled in a controlled area by personnel who is specially equipped and trained to perform this task. The assembling area, work surfaces, equipment and tools are specially maintained to ensure that cleanliness requirements are met.

- Valves are cleaned and degreased for oxygen service
- Valves ends are capped, valves are plastic bagged
- A sticker on the plastic bag indicating "cryogenic use"

Quality


Reference Standards

- Design, testing & inspection according to BS 6364:1984 (amendment 3)
- Testing EN 14432:2014
- Testing EN 1626:2008 (with liquefied Nitrogen per request)
- NDT per ASME B16.34 - optional
- Design according to MMS SP-134 with some deviations in specific valve sizes



Diverter valve

Multiport valve

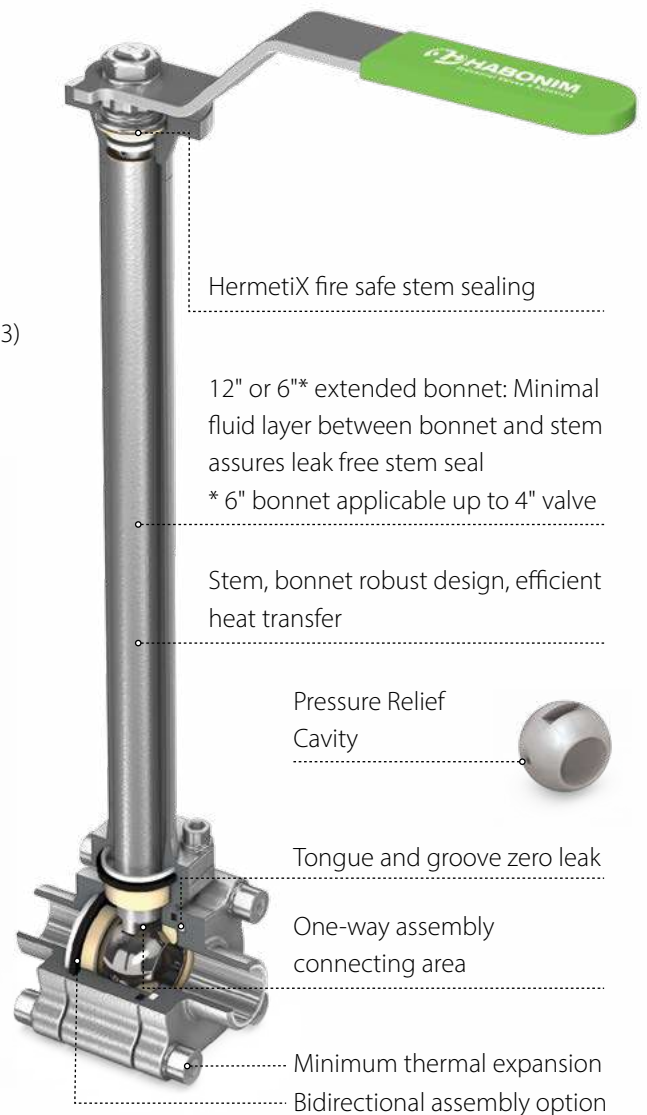



Quick Selection Table

Total HermetiX® |
 Port: Standard Port Full Port Tube Size |
 End Connections: Threaded Flanged Welded
 Ordering Code

Temperature: Cryogenic Down to -269°C (-452°F)	Ball Valve	Design Type	OC	Series	TH	Port	End Con.	Valve Size (Inches)												MWP (ASME Class / DIN PN)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
								1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	6	8	10	12																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														

ASME Class	150				300		600	900	1500		2500		6000	
Pressure Bar	-1 *	0	16	20	40	50	100	150	200	250	350	414	700	1034
Pressure psi	-14 *	0	230	290	580	750	1500	2250	3000	3750	5000	6000	10000	15000

* Vacuum 10^{-6} Tor



CRYOGENIC VALVES

One-Way Assembly

An integral rib is machined at one of the stem flats to match a groove in the ball that faces the relief hole. A "T" mark on the stem tip shows the relief hole direction. These two features ensure a one-way assembly for safe operation and maintenance.

Cavity Pressure Relief

Each cryogenic valve is equipped with a mechanism that prevents pressure buildup in the valve cavity, eliminating the risk that liquefied-gas evaporation will over - pressure the valve body by releasing over-pressured media from the cavity area back to the line.

Habonim uses a variety of such mechanisms:

- Relief hole on the upstream sphere of the ball to prevent pressure buildup in the cavity
- Patented spring loaded seat construction with piston effect for cavity pressure relief
- Single seat active seal construction - no closed cavity
- Pressure Relief Valve, patented solution


Ball with an Integral Pressure Relief Device*

* Designed according to EN ISO 4126-1 "Safety devices for protection against excessive pressure"



Tag
Sealing direction tag indicates bidirectional work and predefined pressure relief side.

Relief direction
Trapped fluid pressure released to the upstream direction.

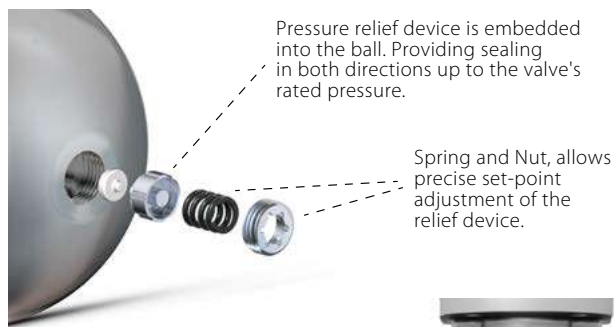

Pressure relief device is embedded into the ball. Providing sealing in both directions up to the valve's rated pressure.

Spring and Nut, allows precise set-point adjustment of the relief device.



Shutoff 1 --

Shutoff 2 --

Direction of pressure relief



"T" mark on stem showing the relief hole direction

PATENTED
US 12044333





Minimal Thermal Expansion


Using one-size-up and double the amount of body bolts reduces linear thermal expansion and dramatically decreases the likelihood of leakage to the atmosphere.

Efficient Heat Transfer

The Habonim standard bonnet length design complies with BS6364 for non-cold-box applications. The long neck bonnet insulates the stem seal from the low temperatures of cryogenic fluids, thus enabling safe and long lasting seal service. A small gap between the bonnet ID and the stem OD, ensures a thick layer between the media and the stem seal.

Inclination Limitation

The Habonim bonnet design comes in two optional versions. Both are designed to prevent cryogenic liquids from reaching the stem seal. Habonim recommends installation in the vertical position, but allows installation at an angle. The 12" bonnet can be installed up to 45° from the vertical axis to maintain fully BS6364 compliant. The 6" bonnet can be installed up to 15° from the vertical axis.

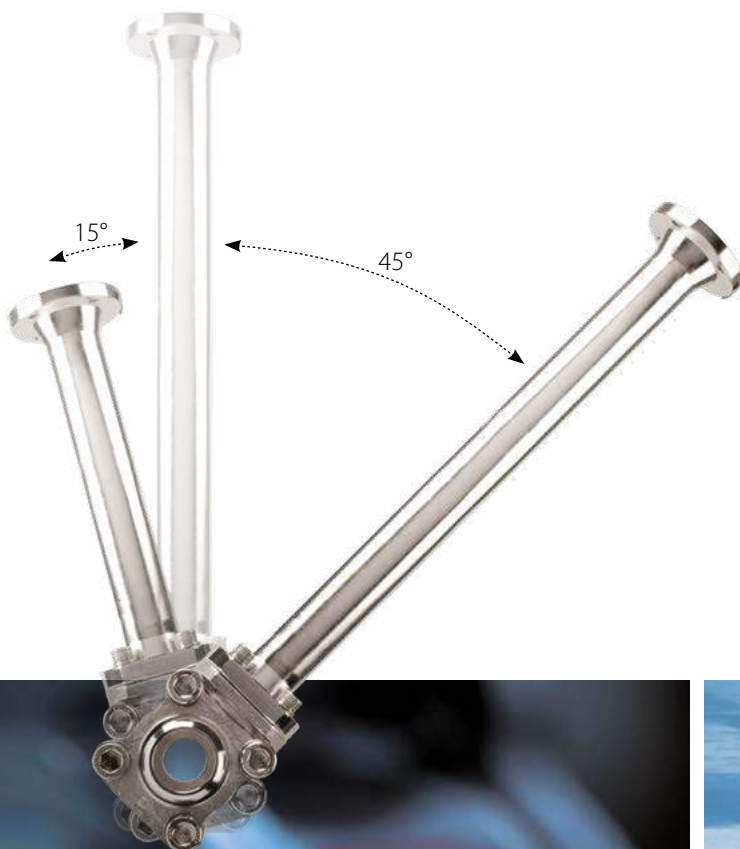


Indicator on the extended bonnet top



Indicator on valve body



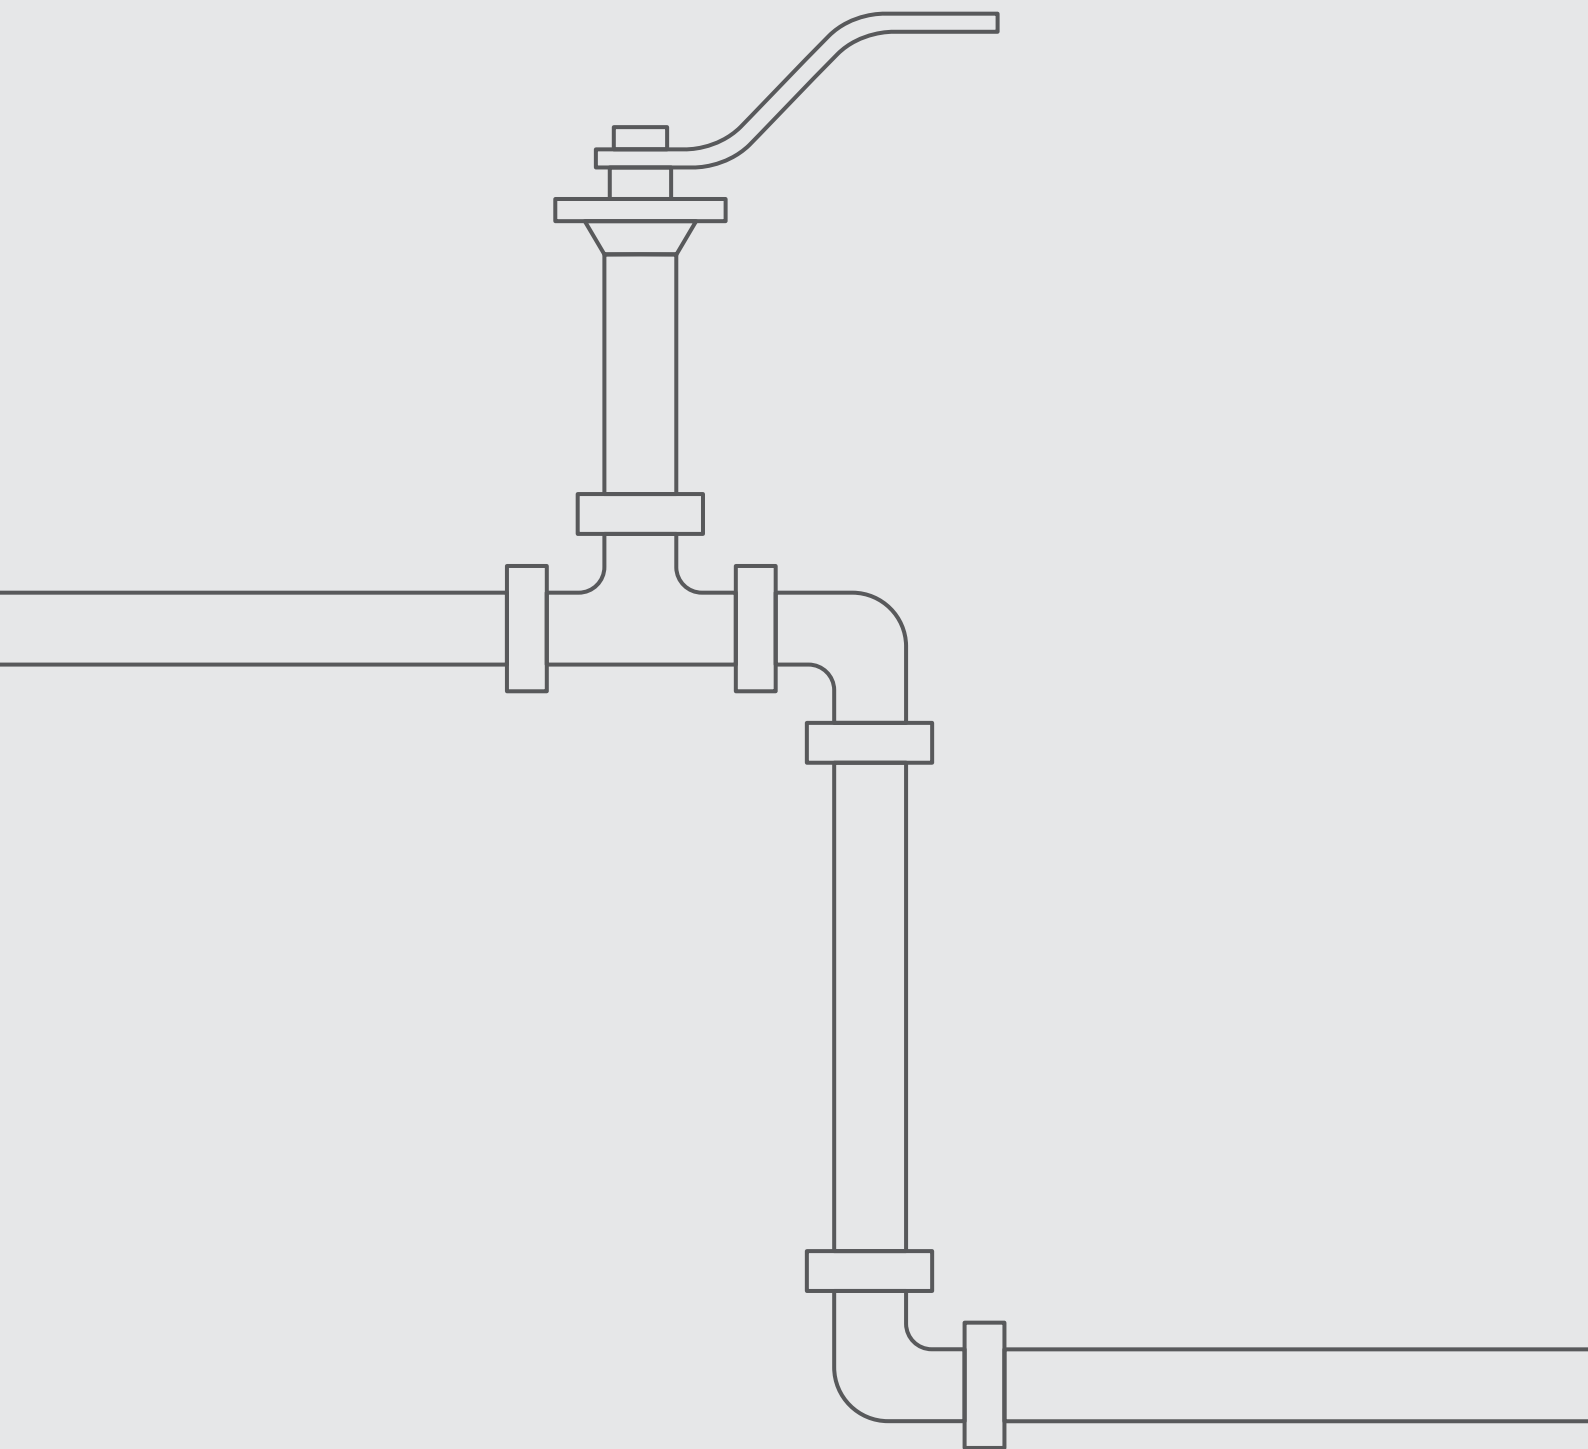


C52



Cryogenic Valves


TRUNNIION

TOP ENTRY

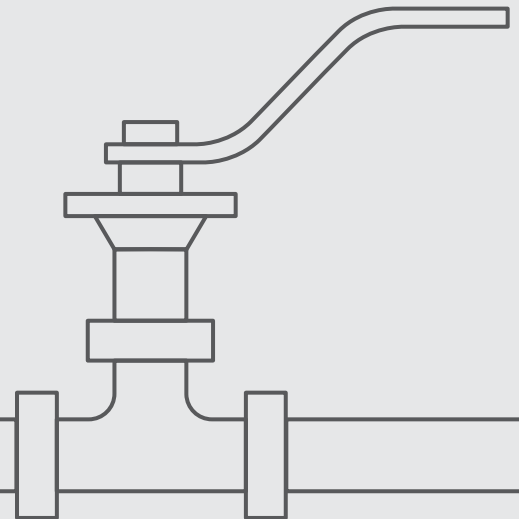

Cryogenic Top Entry Trunnion Mounted Ball Valve

Valve Dimensions

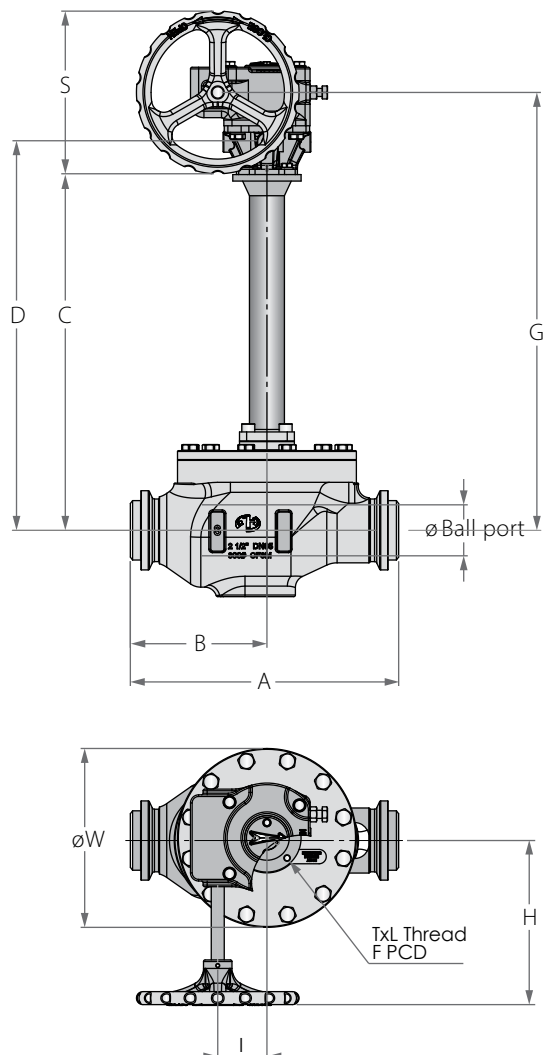

Gear operated

The C52 valves are operated and supplied with factory calibrated gears or CompAct actuators.


Standard stem tops

DD Type
for sizes 1½" - 2½"


Stem flats
show valve
ball position

Square Type
for sizes 2" - 6"

Stem groove
shows valve
ball position

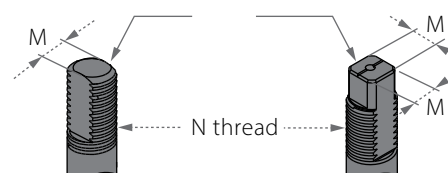

Preparation for actuation



Full Port	Units	Ball port	A	B	C	D	G*	H*	I*	S*	W	M	N	P	F	TxL	Weight ^a kg/lb	KV CV	
DN40	mm	38.2	241.0	129.0	380.0	409.0	468.0	192.0	52.0	200.0	169.0	8.7	%"-18 UNF	7.1	F05	50.0	M6x8	13.3	164
1½"	inch	1.5	9.49	5.08	14.96	16.10	18.43	7.56	2.05	7.87	6.65	0.34		0.28		1.97		29.3	190
DN50	mm	50.8	292.0	151.0	429.0	471.0	518.0	197.0	52.0	250.0	43.0	13.9	M20x2.5	13.9	F07	70.0	M8x8	24.7	327
2"	inch	2.0	11.50	5.94	16.89	18.54	20.39	7.76	2.05	9.84	1.69	0.55		0.55		2.76		54.5	378
DN65	mm	62.7	330.0	168.0	437.0	479.0	536.0	208.2	60.5	300.0	220.0	13.9	M20x2.5	13.2	F07	70.0	M8x8	31.8	668
2½"	inch	2.5	12.99	6.61	17.20	18.86	21.10	8.20	2.38	11.81	8.66	0.55		0.52		2.76		70.1	772
DN80	mm	74.0	356.0	186	480.0	526.5	601.0	270.0	60.5	400.0	240.0	18.9	1"- 14 UNS	18.3	F10	102.0	M10x15	47.2	823
3"	inch	3.0	14.02	7.32	18.90	20.73	23.66	10.63	2.38	15.75	9.45	0.74		0.72		4.02		104.1	951
DN100	mm	100.0	432.0	220.0	493.0	540.0	614.0	489.0	70.0	400.0	305.0	18.9	1"- 14 UNS	18.3	F10	102.0	M10x15	74.0	1678
4"	inch	4.0	17.01	8.66	19.41	21.26	24.17	19.25	2.76	15.75	12.01	0.74		0.72		4.02		163.1	1940
DN150	mm	150.0	559.0	280.0	589.0	658.0	744.5	372.0	122.5	600.0	410.0	28.5	1½" - 12 UNF	28.5	F12	125.0	M12x15	172.5	4199
6"	inch	6.0	22.01	11.02	23.19	25.91	29.31	14.65	4.82	23.62	16.14	1.12		1.12		4.92		380.3	4854

* Gear position dimensions (G, H, I, S) may be subject to changes in some applications

^a Weight of the valve bare shaft (without gear & mounting kit)

Full Port	Machinery Gear	Heavy Duty Gear
DN40 / 1½"	GJE570-GC30L0-09022	GAE550-GC25L0-11022
DN50 / 2"	GJE570-GC30L0-09022	GAE550-GC25L0-11022
DN65 / 2½"	GJE570-GC30L0-09022	GAE550-GC25L0-11022


Full Port	Machinery Gear	Heavy Duty Gear
DN80 / 3"	GJE930-GC50L0-11027	GAE01K-GC30L0-11027
DN100 / 4"	GJE930-GC50L0-11027	GAE01K-GC30L0-11027
DN150 / 6"	GJW2K6-GD70L0-16046	GAE02K-GC40L0-16036

* See Habonim Gears Catalogue for more information



Cryogenic Top Entry Trunnion Mounted Ball Valve

Components & Materials

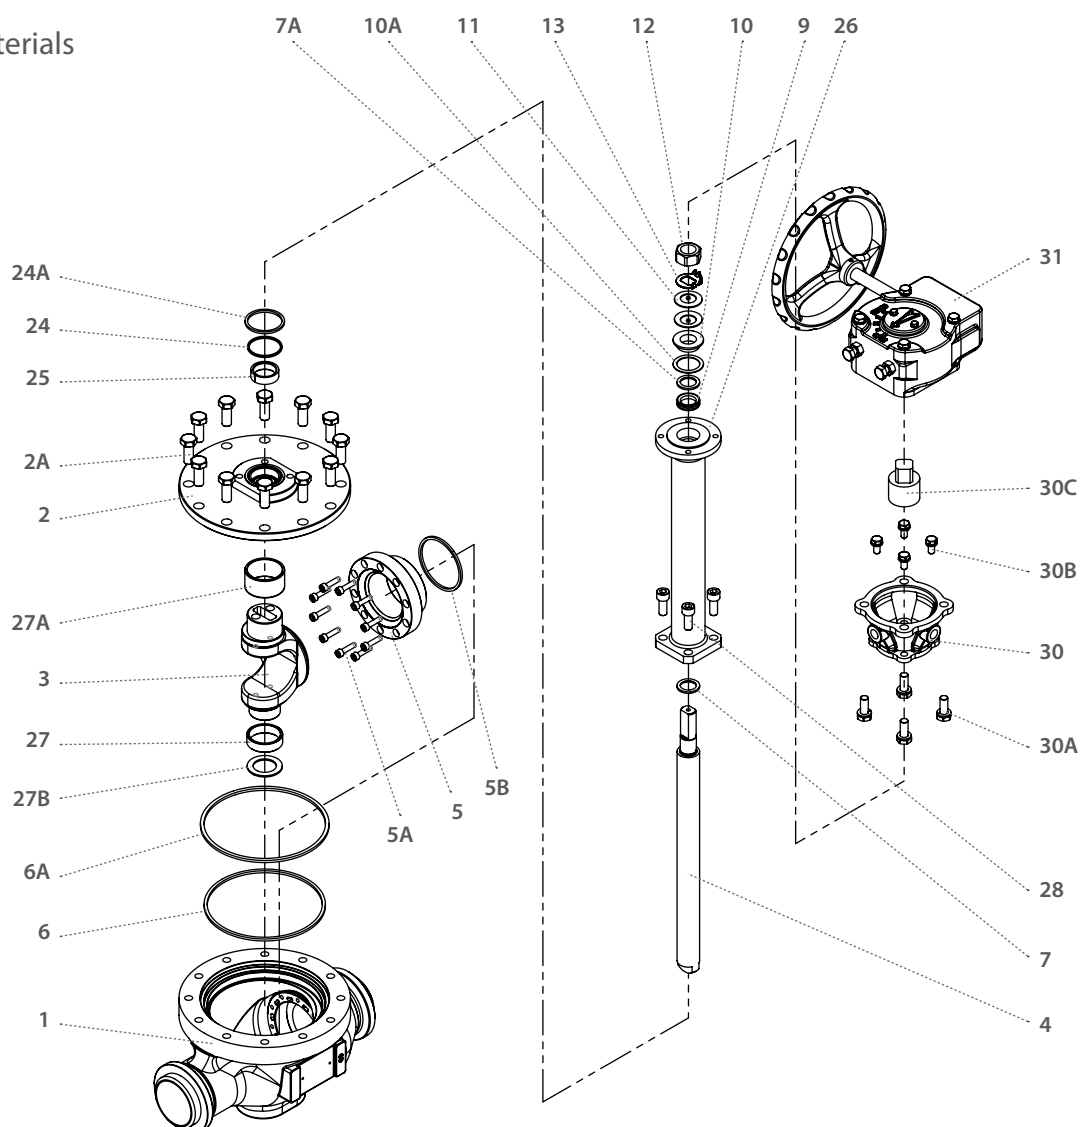

Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	Cover	Acc. Ordering Code	1
2A	Cover Bolts	S. Steel	12
3	Ball	S. Steel	1
4	Stem	High Strength S. Steel	1
5*	Hybrid Seat	S. Steel	1
5A	Seat Bolts	S. Steel	10
5B*	Seat Seal	Graphite	1
6*	Cover Inner Seal	TFM	1
6A*	Cover Outer Seal	Graphite	1
7*	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
9*	Stem Seal	TFM	1
10	Follower	S. Steel	1
10A*	Slide Bearing	S. Steel	1
11	Disc Spring	S. Steel	2

Item	Description	Material specifications	Qty.
12	Stem Nut	S.Steel	1
13	Locking Clip (Tab lock washer for 2" and up)	S.Steel	1
24*	Bonnet Inner Seal	TFM	1
24A*	Bonnet Outer Seal	Graphite	
25*	Stem Bearing	PTFE	1
26	Bonnet	Acc. Ordering Code	1
27	Upper Ball Radial Bearing	S.Steel	1
27A	Lower Ball Radial Bearing	S.Steel	1
27B*	Lower Thrust Bearing	S.Steel + PTFE	1
28	Bonnet Bolts	S.Steel	4
30	Bridge	S.Steel	1
30A	Bridge Upper Bolts	S.Steel	4
30B	Bridge Lower Bolts	S.Steel	4
30C	Adaptor	S.Steel	1
31	Gear	---	1

* Maintenance kit components



Cryogenic Top Entry Trunnion Mounted Ball Valve - Ordering Code System

"Mandatory option" options are marked with **green background** | "Standard offer" options are marked with **light green background**

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	.	.	30
3	0		F	C	B	5	2	W	-	6	M	6	Z	C	A	G	/	X	B	W						
Size		Features			Series		Design	Body & ends material			Stem material	Ball & seat material	Seat feature	Seat insert material	Inner Seal material	Outer Seal material	End connection			Special features						

Size (1-2)		
Code	inch	mm
15	1½"	40
20	2"	50
25	2½"	65
30	3"	80
40	4"	100
60	6"	150
Features (3-6)		
C	Cryogenic design	
B	Full port	
F	Fire safe	

Series (7-8)	
52	ASME #300 Top Entry
Design (9)	
W	Total HermetiX Integrity package
Body & ends material (11)	
6	S. Steel
Stem material (12)	
M	High Strength S. Steel
Ball & seat material (13)	
6	S. Steel

Seat feature (14)	
Z	Eccentric C-Ball
Seat insert (15)	
C	PCTFE
Primary bonnet seal (16)	
A	TFM
Outer Seal material (17)	
G	Graphite

End Connection (19-22)	
XBW	Butt weld ASME B16.25 SCH40
XBW10	Butt weld ASME B16.25 SCH10
XBW80	Butt weld ASME B16.25 SCH80
ETI1.6	Butt weld ISO 1127, 1.6mm
ETI2.0	Butt weld ISO 1127, 2.0mm
ETI2.3	Butt weld ISO 1127, 2.3mm
Special Features (24-30)	

C91

C92

C93

C94

C95


C96



Cryogenic Valves

TRUNNION

3 PIECE

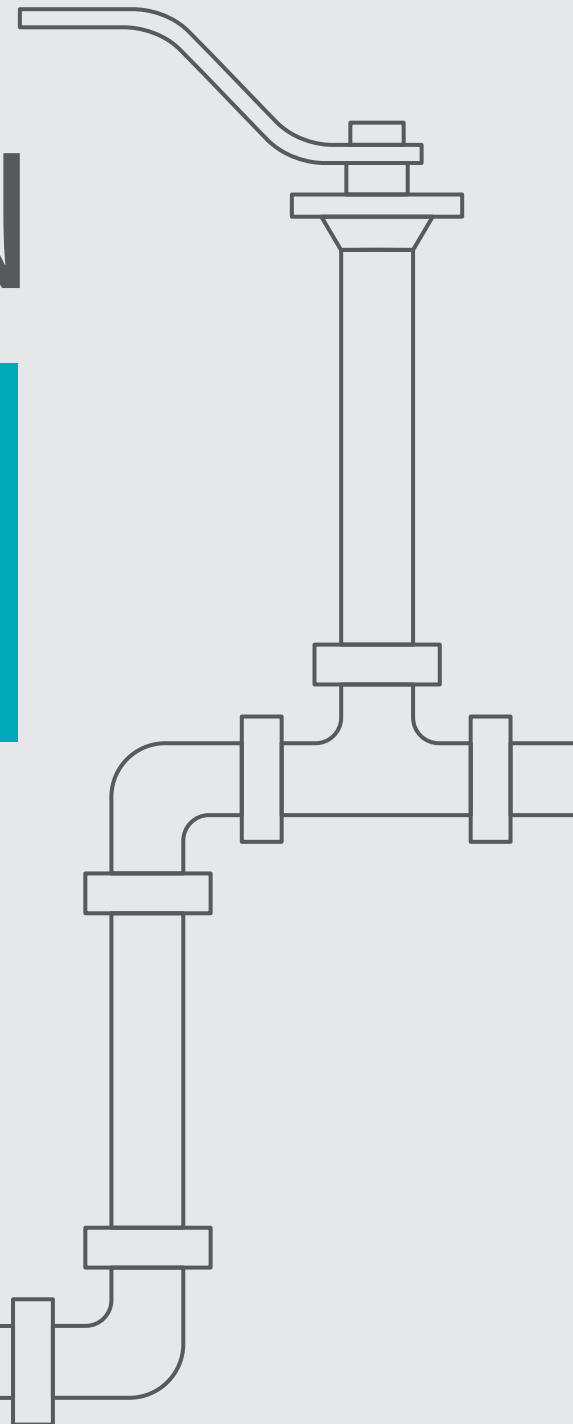


C91

C92


2"-6" | DN50-DN150 | CLASS 150/300

Cryogenic Trunnion Mounted Ball 3 Piece

Valve Dimensions

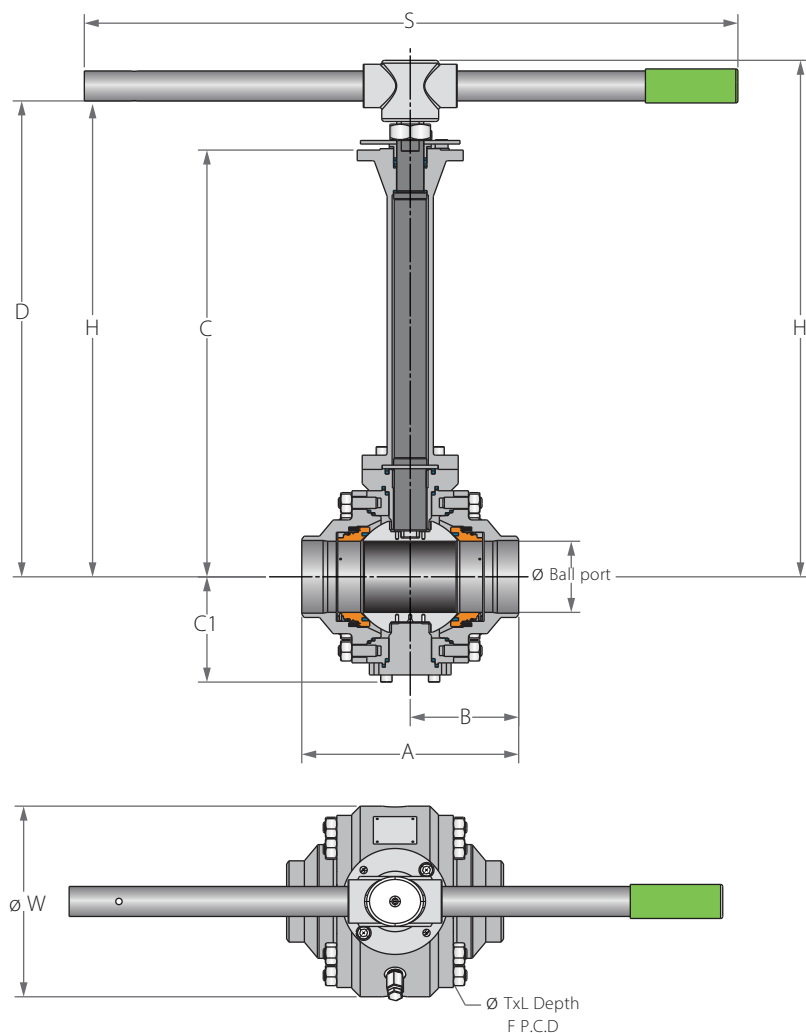

Preparation for actuation




Std. port	Full port	Unit	Ball port	A		B		C	C1	D	W		M SQ	P SQ	H	S	F		TxL	Weight kg/lb		Kv / Cv			
				150	300	150	300				150	300								150	300	150	300	150	300
DN80	DN50	mm	49.0	216.0	216.0	108.0	108.0	500.0	94.0	546.0	169.0	169.0	18.9	22.0	525.0	401.0	F10	102.0	M10X15	27	31	400	363		
3"	2"	inch	1.93	8.5	8.5	4.25	4.25	19.69	3.7	21.52	6.65	6.65	0.74	0.89	20.7	15.79		4.02	(4 holes)	60	68	463	420		
DN100	DN80	mm	74.0	283.0	283.0	141.5	141.5	550.0	117.0	619.1	209.0	219.0	28.45	35.2	638.6	610.0	F12	125.0	M12X15	44	61	1125	952		
4"	3"	inch	2.91	11.14	11.14	5.57	5.57	21.65	4.61	24.37	8.23	8.62	1.12	1.39	25.14	24.02		4.92	(4 holes)	97	134	1300	1100		
DN150	DN100	mm	100.0	305.0	305.0	152.5	152.5	600.0	139.0	669.1	259.0	268.0	28.45	35.2	662.6	916.0	F12	125.0	M12X15	66	100	2154	1860		
6"	4"	inch	3.94	12.01	12.01	6.0	6.0	236.22	5.47	26.34	10.2	10.55	1.12	1.39	26.09	36.06		4.92	(4 holes)	146	220	2490	2150		
DN200	DN150	mm	150.0	457.0	457.0	228.5	228.5	607.0	191.0	719.6	355.0	359.0	35.9	43.5	777.1	916.0	F14	140.0	M16X20	180	216	4723	4628		
8"	6"	inch	5.91	17.99	17.99	9.0	9.0	23.9.0	7.52	28.33	13.98	14.13	1.41	1.71	30.59	36.06		5.51	(4 holes)	397	476	5460	5350		




Cryogenic Trunnion Mounted Ball 3 Piece

Valve Dimensions

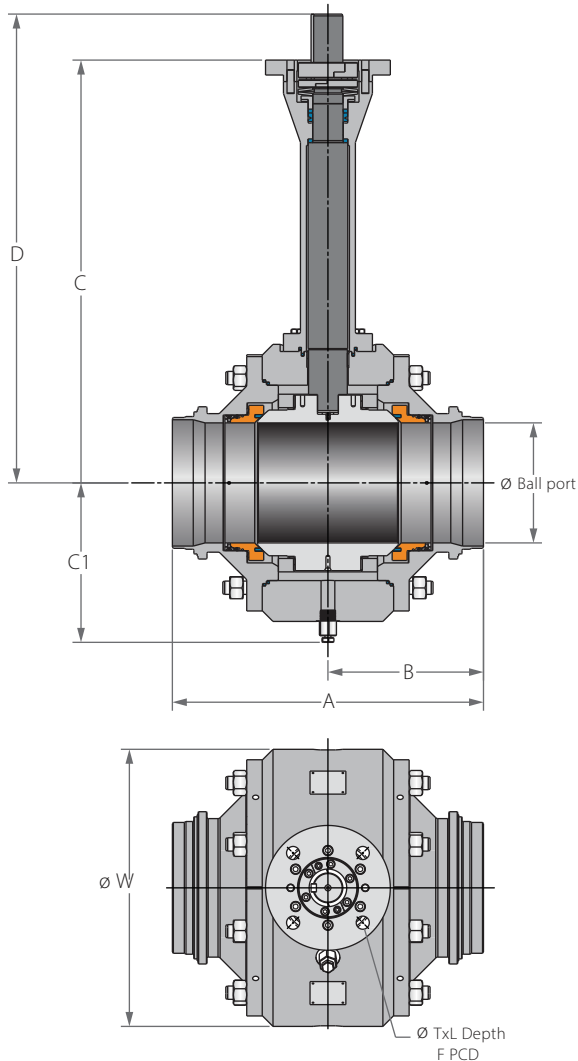

Preparation for actuation



Std. port	Full port	Unit	Ball port	A		B		C	C1	D	W		P	M	K	F		TxL	Weight kg/ib		Kv / Cv					
				150	300	150	300				150	300							150	300	150	300	150	300	150	300
DN250	DN200	mm	201.0	521.0	521.0	260.5	260.5	708.0	215.0	785.0	459.0	459.0	50.0	54.0	14.0	F16	165.0	22x25	346	378	9273	8737				
10"	8"	inch	7.91	20.51	20.51	10.26	10.26	27.87	8.46	30.91	18.07	18.07	1.97	2.13	0.55		6.5.0	(4 holes)	763	833	10720	10100				
DN300	DN250	mm	252.0	559.0	559.0	279.5	279.5	713.3	260.0	790.4	550.0	550.0	50.0	54.0	14.0	F25	254.0	18x25	518	639	15224	14792				
12"	10"	inch	9.92	22.01	22.01	11.0	11.0	28.08	10.24	31.12	21.65	21.65	1.97	2.13	0.55		10.0	(8 holes)	1142	1409	17600	17100				
DN350	DN300	mm	303.0	635.0	635.0	317.5	317.5	800.0	300.0	880.5	610.0	610.0	60.0	63.5	18.0	F25	254.0	18x25	723	833	23096	22404				
14"	12"	inch	11.93	25.0	25.0	12.5	12.5	31.5	11.81	34.67	24.02	24.02	2.36	2.5	0.71		10.0	(8 holes)	1594	1836	26700	25900				


C93

C94


2"-6" | DN50-DN150 | CLASS 600/900

Cryogenic Trunnion Mounted Ball 3 Piece

Valve Dimensions

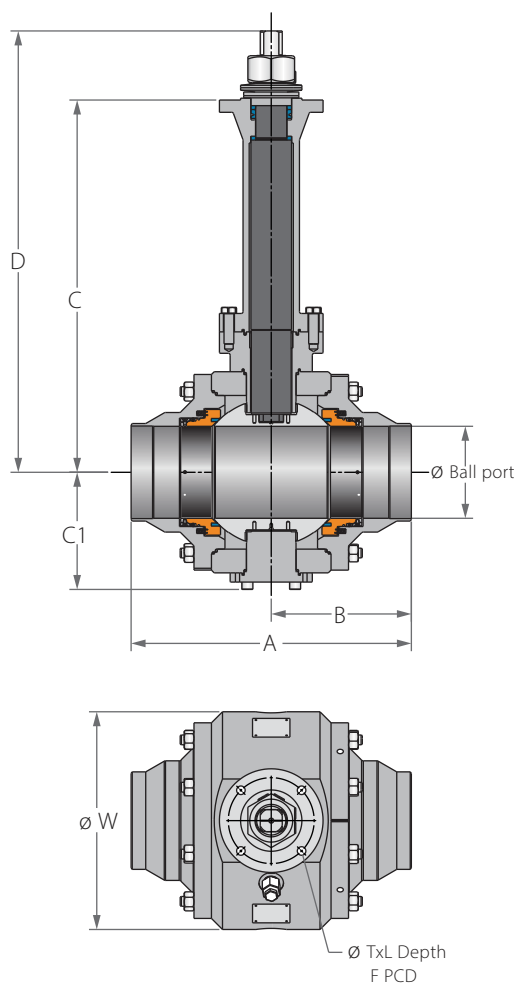

Preparation for actuation



Std. port	Full port	Unit	Ball port	A		B		C		C1		D		W		M SQ	P SQ	F		TxL	Weight kg/lb		Kv / Cv	
				600	900	600	900	600	900	600	900	600	900	150	300						150	300	150	300
DN80	DN50	mm	49.0	292.0	368.0	146.0	184.0	500.0	459.0	119.0	263.0	247.0	507.0	205.0	205.0	18.90	22.70	F10	102.0	M10X15 (4 holes)	49	67	329	294
3"	2"	inch	1.93	11.5	14.49	5.75	7.24	19.69	18.09	4.69	10.35	21.56	19.96	8.07	8.07	0.74	0.89		4.02		108	148	380	340
DN100	DN80	mm	74.0	356.0	381.0	178.0	190.5	550.0	502.0	160.0	152.7	617.0	569.0	270.0	275.0	28.45	35.20	F12	125.0	M12X15 (4 holes)	103	114	874	822
4"	3"	inch	2.91	14.02	15.0	7.01	7.50	21.65	19.76	6.30	6.01	24.29	22.40	10.63	10.83	1.12	1.39		4.92		227	251	1010	950
DN150	DN100	mm	100.0	432.0	457.0	216.0	228.5	600.0	193.0	184.0	184.0	712.6	259.0	325.0	325.0	35.90	43.50	F14	140.0	M16X20 (4 holes)	166	186	1557	1471
6"	4"	inch	3.94	17.01	17.99	8.50	9.0	23.62	7.60	7.24	7.24	28.06	10.20	12.80	12.80	1.41	1.71		5.51		366	410	1800	1700
DN200	DN150	mm	150.0	559.0	610.0	279.5	305.0	624.5	624.5	214.5	224.0	77.1	755.1	400.0	435.0	35.90	43.50	F14	140.0	M16X20 (4 holes)	342	418	3893	3823
8"	6"	inch	5.91	22.01	24.02	11.0	12.01	24.59	25.30	8.44	8.82	29.02	29.73	15.75	17.13	1.41	1.71		5.51		754	922	4500	4420

C93


C94

8"-14" | DN200-DN350 | CLASS 600/900




Cryogenic Trunnion Mounted Ball 3 Piece

Valve Dimensions

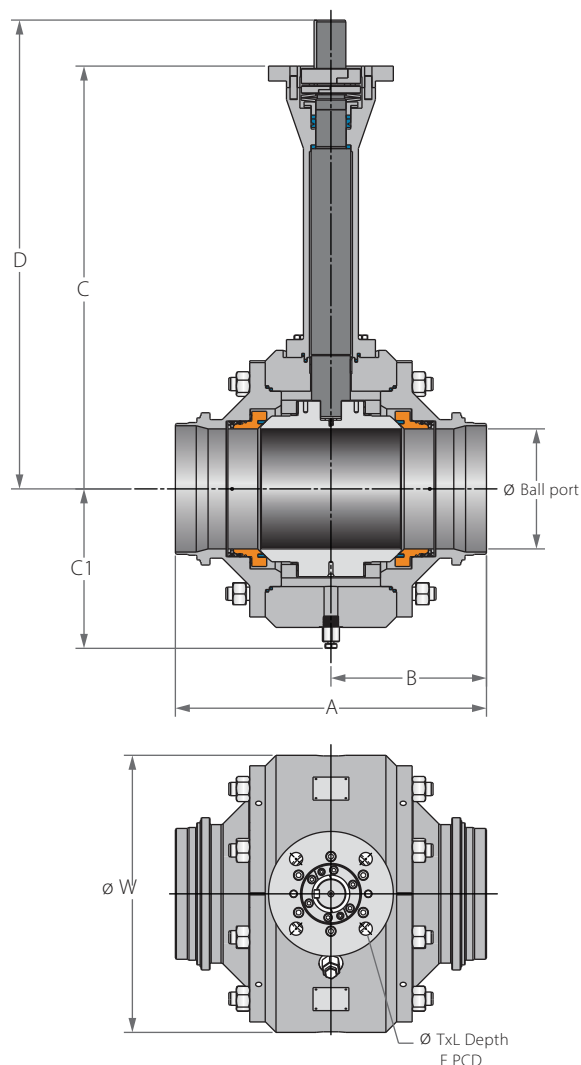

Preparation for actuation



Std. port	Full port	Unit	Ball port	A		B		C		C1		D		W		P	M	K	F	TxL	Weight kg/lb		Kv / Cv		
				600	900	600	900	600	900	600	900	600	900	600	900						600	900	600	900	600
DN250	DN200	mm	201.0	660.0	737.0	330.0	368.5	696.0	696.0	263.0	263.0	774.0	774.0	500.0	519.0	60.0	63.5	14.0	F25	254.0	18x25	577	836	7742	7344
10"	8"	inch	7.91	25.98	29.02	12.99	14.51	27.4	27.4	10.35	10.35	30.47	30.47	19.69	20.43	2.36	2.5	0.55		10.0	(8 holes)	1272	1843	8950	8490
DN300	DN250	mm	252.0	787.0	838.0	393.5	419.0	739.0	757.0	310.0	326.0	817.0	835.0	595.0	609.0	60.0	63.5	14.0	F25	254.0	18x35	931	1301	12543	12110
12"	10"	inch	9.92	30.98	32.99	15.49	16.5	29.09	29.8	12.2	12.83	32.17	32.87	23.43	23.98	2.36	2.5	0.55		10.0	(8 holes)	2052	2868	14500	14000
DN350	DN300	mm	303.0	838.0	965.0	419.0	482.5	800.0	788.0	344.0	361.0	915.0	903.0	695.0	709.0	72.0	76.5	20.0	F25	254.0	18x35	1126	1576	19809	18598
14"	12"	inch	11.93	32.99	37.99	16.5	19.0	31.50	31.02	13.54	14.21	36.02	35.55	27.36	27.91	2.83	3.01	0.79		10.0	(8 holes)	2482	3474	22900	21500


C95

C96


2"-6" | DN50-DN150 | CLASS 1500/2500

Cryogenic High Pressure Trunnion Mounted Ball 3 Piece

Valve Dimensions

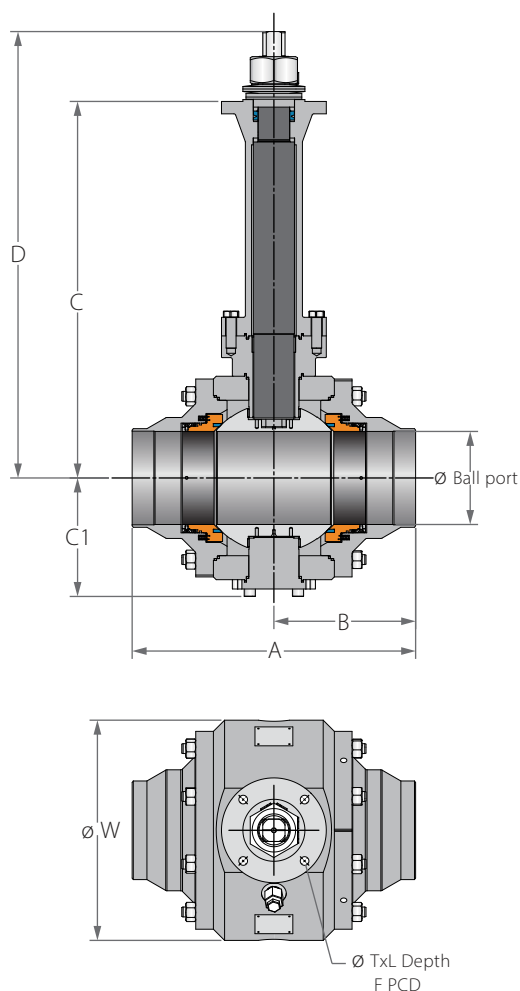

Preparation for actuation



Std. port	Full port	Unit	Ball port		A		B		C	C1	D	W		M SQ	P SQ	F		TxL	Weight kg/lb		Kv / Cv	
			1500	2500	1500	2500	1500	2500				1500	2500						1500	2500	1500	2500
DN80	DN50	mm	49.0	42.0	368.0	451.0	184.0	225.5	500.0	127.0	569.0	215.0	235.0	28.45	35.0	F12	125	M12X15 (4 holes)	90	179	281	260
3"	2"	inch	1.93	1.65	14.49	17.76	7.24	8.88	19.69	5.0	22.4	8.46	9.25	1.12	1.38		4.92		198	395	325	300
DN100	DN80	mm	74.0	62.0	470.0	578.0	235.0	289.0	550.0	201.50	619.0	265.0	305.0	28.45	35.0	F12	125	M12X15 (4 holes)	175	340	735	649
4"	3"	inch	2.91	2.44	18.5	22.76	9.25	11.38	21.65	7.93	24.37	10.43	12.01	1.12	1.38		4.92		386	750	850	750
DN150	DN100	mm	100.0	87.0	546.0	673.0	273.0	336.5	600.0	198.5	712.0	310.0	355.0	35.9	43.5	F14	140	M16X20 (4 holes)	330	646	1384	1228
6"	4"	inch	3.94	3.43	21.5	26.5	10.75	13.25	23.62	7.81	28.03	12.2	13.98	1.41	1.71		5.51		728	1424	1600	1420
DN200	DN150	mm	144.0	131.0	705.0	914.0	352.5	457.0	608.0	272.0	763.0	395.0	485.0	45.9	59.0	F16	165	M20x30 (4 holes)	627	1227	3590	2206
8"	6"	inch	5.67	5.16	27.76	35.98	13.88	17.99	23.94	10.71	30.04	15.55	19.09	1.81	2.32		6.5		1382	2705	4150	2550

C95


C96

8"-12" | DN200-DN300 | CLASS 1500/2500




Cryogenic High Pressure Trunnion Mounted Ball 3 Piece

Valve Dimensions

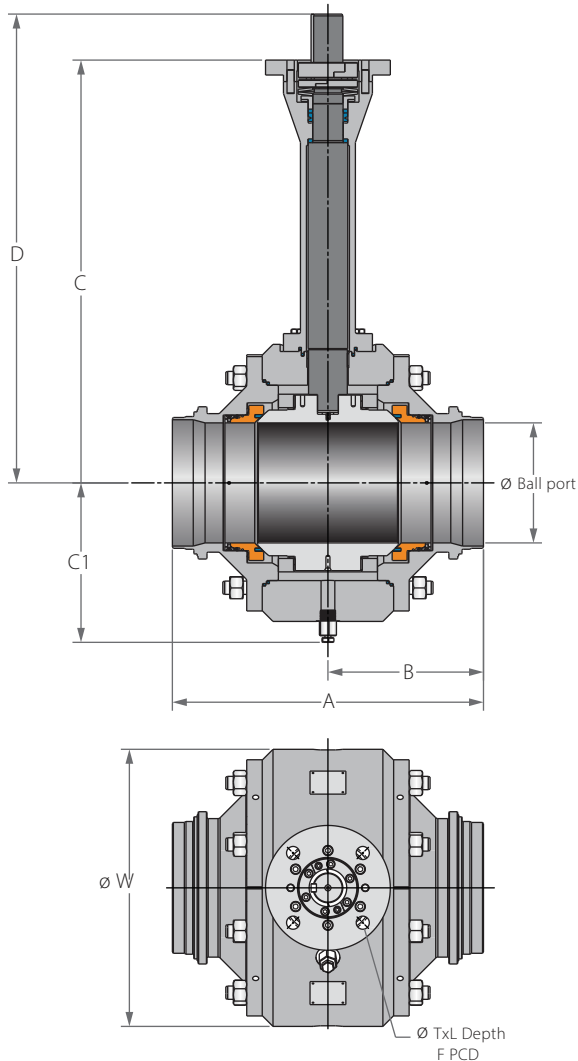

Preparation for actuation



Std. port	Full port	Unit	Ball port		A		B		C	C1	D	W		P	M	K	F		TxL	Weight kg/lb		Kv / Cv	
			1500	2500	1500	2500	1500	2500				1500	2500							1500	2500	1500	2500
DN250	DN200	mm	192.0	179.0	832.0	1022.0	416.0	511.0	705.0	273.0	780.0	485.0	550.0	72.0	76.9	20.0	F25	254.0	18x25	1000	2330	6963	4758
10"	8"	inch	7.56	7.05	32.76	40.24	16.38	20.12	27.76	10.75	30.71	19.09	21.65	2.83	3.03	0.79		10.0	(8 holes)	2205	5137	8050	5500
DN300	DN250	mm	239.0	223.0	991.0	1270.0	495.5	635.0	742.0	374.0	846.0	585.0	675.0	98.0	104.4	28.0	F35	356.0	32x45	1900	3623	11418	7389
12"	10"	inch	9.41	8.78	39.02	50.0	19.51	25.0	29.21	14.72	33.31	23.03	26.57	3.86	4.11	1.1		14.01	(8 holes)	4189	7987	13200	8542

C91

C92

C93

C94


C95

C96

2"-6"
DN50-DN150

Cryogenic Trunnion Mounted Ball 3 Piece

Components & Materials

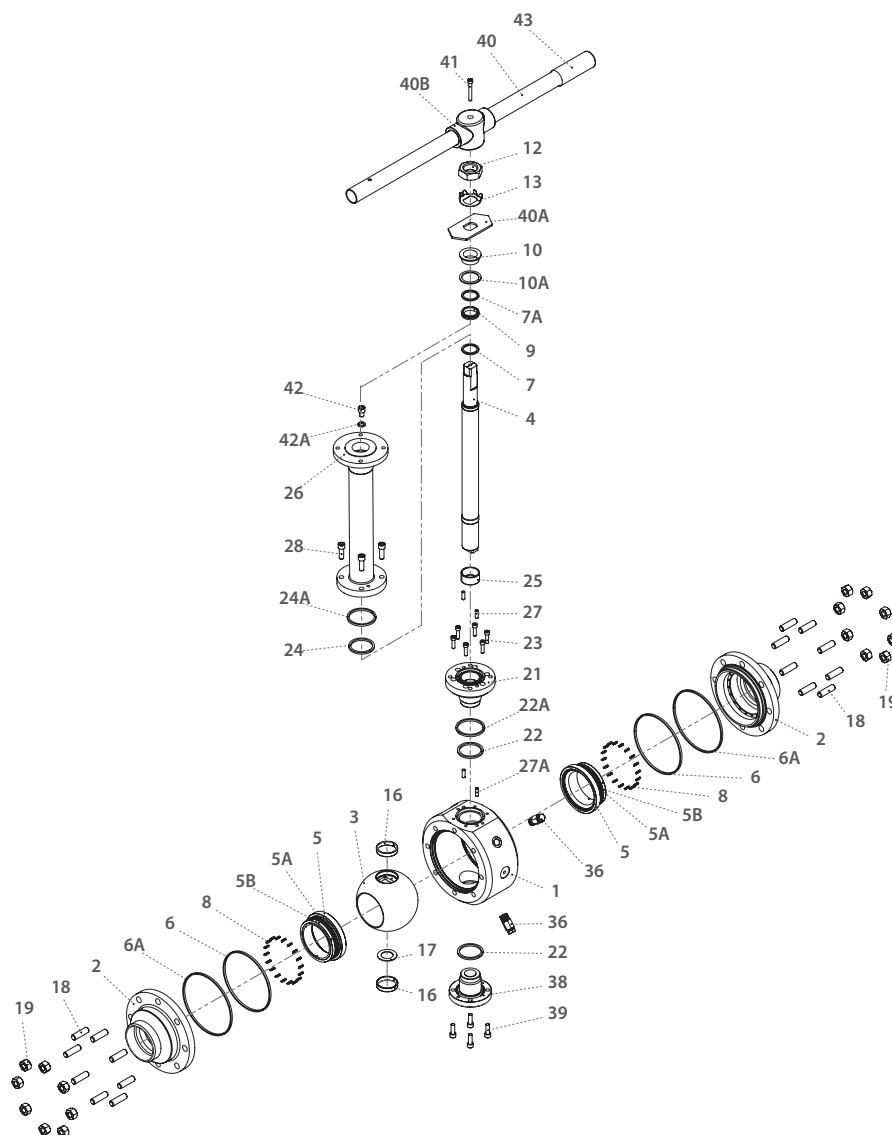

Item	Description	Material Spec. ASTM	Qty.
1	Body	Acc. Ordering Code	1
2	End	Acc. Ordering Code	2
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	2
5A	Seat Insert	Acc. Ordering Code	2
5B*	Seat Seal	PTFE+Elgiloy, Graphite	2
6*	Body Inner Seal	TFM, Graphite	2
6A*	Body Outer Seal	Graphite	2
7*	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
8	Seat Spring	Inconel 750	20-32
9	Stem Seal	HermetiX TFM	1
10	Follower	S. Steel	1
10A*	Slide Bearing	S. Steel	1
12	Stem Nut	S. Steel	1
13	Tab Lock Washer	S. Steel	1
16	Ball Bearing	PMT 316	2
17	Ball Thrust Washer	PMT 316	2
18	Body Studs	ASTM A320-B8M	8-40
19	Body Nut	A194 8M	8-40
20	Anti-Static Spring	S. Steel	1

Item	Description	Material Spec. ASTM	Qty.
21	Gland Plate	A479 316/ 316L	1
22*	Gland Plate Seal	Graphite	1
22A*	Outer Trunnion Seal	Graphite	1
23	Gland Plate Bolts	ASTM A320-B8M	6-8
24*	Bonnet Seal	HNBR, VITON	1
24A*	Bonnet Outer Seal	Graphite	1
25	Stem Bearing	PMT 316	1
26	Bonnet	S. Steel	1
27	Bonnet Pins	S. Steel	2
27A	Gland Pins	S. Steel	2
28	Bonnet Bolts	ASTM A320-B8M	4-8
36	Plug Drain	S. Steel	2
37	Tag (not shown)	S.Steel	1
38	Outer Trunnion	A479 316	1
39	Outer Trunnion Bolts	ASTM A320-B8M	4-8
40	Pipe Handle	S. Steel	1
40A	Stop Plate	S. Steel	1
40B	Wrench Head	S. Steel	1
41	Wrench Head Bolt	S. Steel	1
42	Stop Bolt	S. Steel	2
42A	Spring Washer	S. Steel	2
43	Stem Key Bolt	PCV	1

* Maintenance kit components

C91

C92

C93

C94


C95

C96

8"-12"
DN200-DN300

Cryogenic Trunnion Mounted Ball 3 Piece

Components & Materials

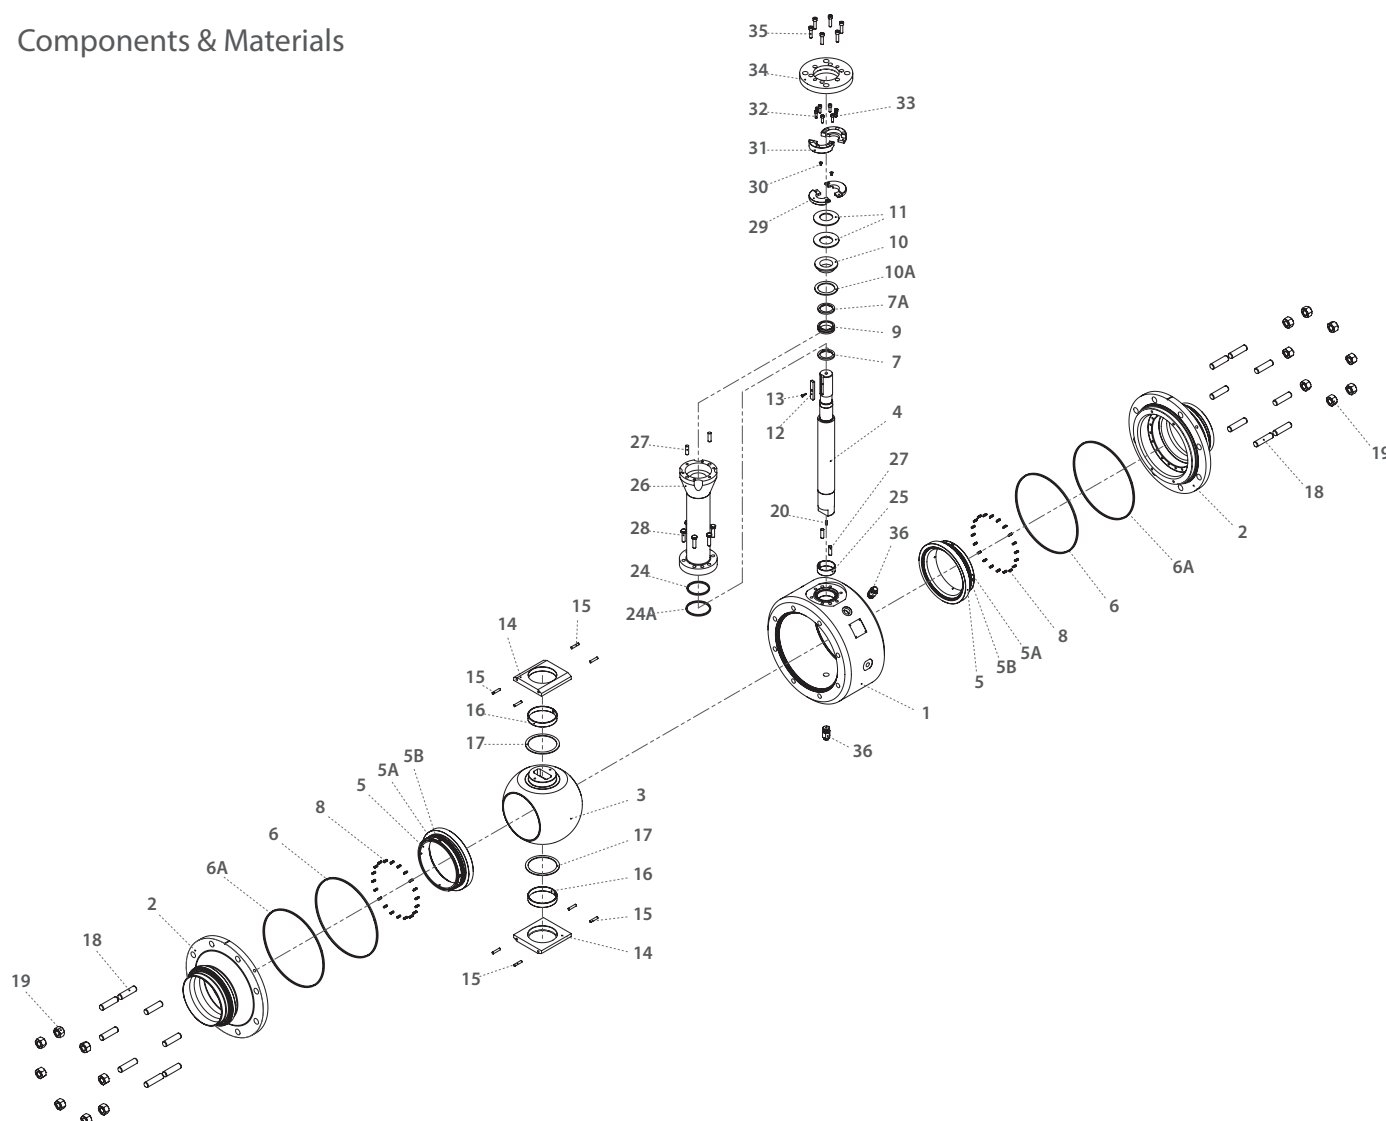

Item	Description	Material Spec. ASTM	Qty.
1	Body	Acc. Ordering Code	1
2	End	Acc. Ordering Code	2
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5	Seat	Acc. Ordering Code	2
5A	Seat Insert	Acc. Ordering Code	2
5B*	Seat Seal	PTFE+Elgiloy, Graphite	2
6*	Body Inner Seal	HNBR, VITON	2
6A*	Body Outer Seal	Graphite	2
7*	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
8	Seat Spring	Inconel 750	20-44
9	Stem Seal	HermetiX TFM	1
10	Follower	S. Steel	1
10A*	Slide Bearing	S. Steel	1
11	Disc Spring	S. Steel	2
12	Stem Key	S. Steel	1
13	Stem Key Bolt	S. Steel	1
14	Trunnion Plate	A479 316	2
15	Trunnion Plate Pin	S. Steel	8

Item	Description	Material Spec. ASTM	Qty.
16	Ball Bearing	PMT 316	2
17	Ball Thrust Washer	PMT 316	2
18	Body Studs	ASTM A320-B8M	16-40
19	Body Nuts	A194 8M	16-40
20	Anti-Static Spring	S. Steel	1
24*	Bonnet Seal	HNBR, VITON	1
24A*	Bonnet Outer Seal	Graphite	1
25	Stem Bearing	PMT 316	1
26	Bonnet	S. Steel	1
27	Bonnet Pins	S. Steel	4-6
28	Bonnet Bolts	ASTM A320-B8M	4-8
29	Bonnet Follower	A479 316	2
30	Bonnet Follower Bolt	ASTM A320-B8M	2
31	Stem Key Bolt	A479 316	2
32	Iso Plate	ASTM A320-B8M	6-8
33	Upper Gland Bolts	ASTM A320-B8M	2
34	Iso Plate	A479 316	1
35	Iso Plate Bolt	ASTM A320-B8M	4-8
36	Plug Drain	S. Steel	2
37	Tag (not shown)	S. Steel	2

* Maintenance kit components

C91

C92

C93

C94

C95

C96



Cryogenic Trunnion Mounted Ball 3 Piece - Ordering Code System

"Mandatory option" options are marked with **green background** | "Standard offer" options are marked with **light green background**

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
6	0		F	C	B	9	3	W	-	6	M	6	S	C	A	G	/	X	B	W									
Size		Features				Series		Design		Body & ends	Stem	Ball & seat ring	Seat feature	Seat insert	Inner Seal	Outer Seal		End connection				Special features							

Size (1-2)		
Code	inch	mm
20	2"	50
30	3"	80
40	4"	100
60	6"	150
80	8"	200
A0	10"	250
A2	12"	300
A4*	14"	350

* for C91, C92, C93, series only

Features (3-6)	
C	Cryogenic design
F	Fire safe
B	Full port

Series (7-8)	
91	3 Piece design #150 (PN20)
92	3 Piece design #300 (PN50)
93	3 Piece design #600 (PN100)
94	3 Piece design #900 (PN150)
95	3 Piece High pressure #1500 (PN250)
96	3 Piece High pressure #2500 (PN420)

Design (9)	
W	Total HermetiX Integrity package

Body & ends material (11)	
6	S. Steel

Stem material (12)	
M	High Strength S. Steel

Ball & seat ring material (13)	
6	S. Steel

Seat feature (14)	
S	Single Piston Effect (SPE) (API 6D DBB)
D	Double Piston Effect (DPE)
C	DPE & SPE combination (API 6D DIB-2)

Seat insert (15)	
C	PCTFE
A	TFM

Inner Seal (16)	
A	TFM

Outer Seal (17)	
G	Graphite

End Connection (19-22)	
Welded ends	
XBW	Extended butt weld sch 40
XBW80	Extended butt weld sch 80
XBW160	Extended butt weld sch 160
XBWXXS	Extended butt weld sch XXS
Flanged Raised face	
150	ASME B16.5 #150 RF
300	ASME B16.5 #300 RF
600	ASME B16.5 #600 RF
900	ASME B16.5 #900 RF
1500	ASME B16.5 #1500 RF
2500	ASME B16.5 #2500 RF
PN16	DIN EN 1092-1 PN16
PN40	DIN EN 1092-1 PN40
PN63	DIN EN 1092-1 PN63
PN100	DIN EN 1092-1 PN100
PN160	DIN EN 1092-1 PN160
PN250	DIN EN 1092-1 PN250
PN320	DIN EN 1092-1 PN320
PN400	DIN EN 1092-1 PN400
Flanged RTJ	
600RTJ	ASME B16.5 #600 RTJ
900RTJ	ASME B16.5 #900 RTJ
1500RTJ	ASME B16.5 #1500 RTJ
2500RTJ	ASME B16.5 #2500 RTJ

C81

C82


C83



Cryogenic Valves

TRUNNIION

2 PIECE

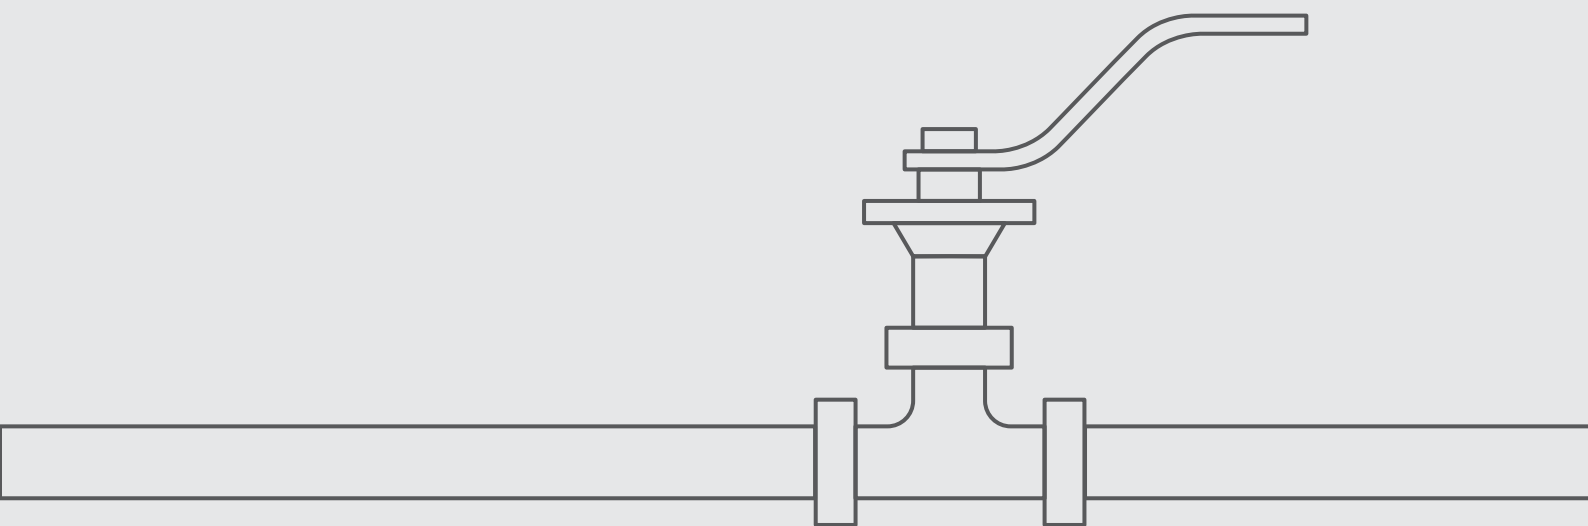


C81

C82


2"-6" | DN50-DN150 | CLASS 150/300

Cryogenic Trunnion Mounted Ball 2 Piece

Valve Dimensions

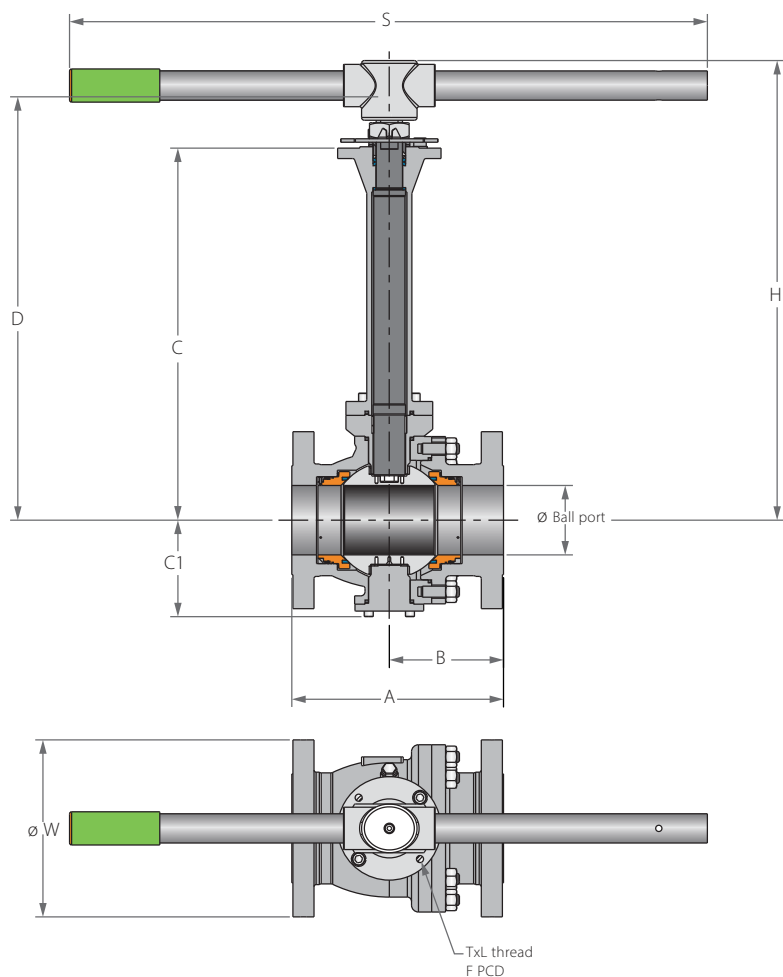

Preparation for actuation




Full port	Unit	Ball port	A		B		C	C1	D	W		M SQ	P SQ	H	S	F	TxL	Weight kg/lb		Kv / Cv					
			150	300	150	300				150	300							150	300	150	300	150	300	150	300
DN50	mm	49.0	178.0	216.0	89.0	113.5	500.0	94.0	546.5	150.0	165.0	18.9	22.70	525.8	401.0	F10	102.0	M10X15 (4 holes)	24	27	400	363			
2"	inch	1.93	7.01	8.5	3.5	4.47	19.69	3.7	21.52	5.91	6.50	0.74	0.89	20.70	15.79		4.02		53	60	463	420			
DN80	mm	74.0	203.0	283.0	101.5	154.0	550.0	117.0	619.1	190.0	210.0	28.45	35.20	638.6	610.0	F12	125.0	M12X15 (4 holes)	42	53	1125	952			
3"	inch	2.91	7.99	11.14	4.0	6.06	21.65	4.61	24.37	7.48	8.27	1.12	1.39	25.14	24.02		4.92		93	117	1300	1100			
DN100	mm	100.0	229.0	305.0	114.5	164.5	600.0	139.0	669.1	230.0	255.0	28.45	35.20	662.6	916.0	F12	125.0	M12X15 (4 holes)	64	76	2154	1860			
4"	inch	3.94	9.02	12.0	4.51	6.48	23.62	5.47	26.34	9.06	10.04	1.12	1.39	26.09	36.06		4.92		141	168	2490	2150			
DN150	mm	150.0	394.0	403.0	209.1	207.6	607.0	191.0	719.6	280.0	320.0	35.9	43.50	777.1	916.0	F14	140.0	M16X20 (4 holes)	165	176	4723	4628			
6"	inch	5.91	15.51	15.87	8.23	8.17	23.9	7.52	28.33	11.02	12.6	1.41	1.71	30.59	36.06		5.51		364	388	5460	5350			




Cryogenic Trunnion Mounted Ball 2 Piece

Valve Dimensions

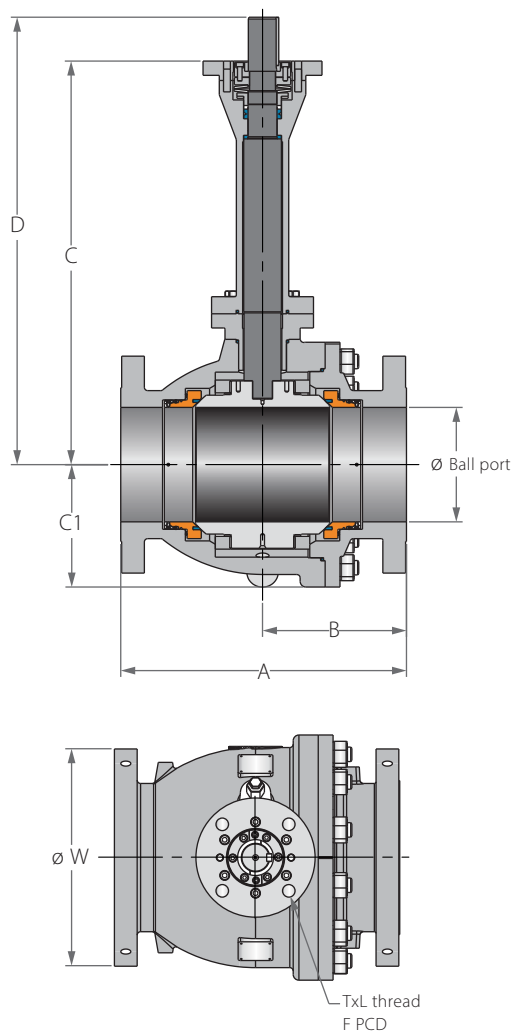


Preparation for actuation




Full port	Unit	Ball port	A		B		C	C1	D	W		P	M	K	F		TxL	Weight kg/ib		Kv / Cv					
			150	300	150	300				150	300							150	300	150	300	150	300	150	300
DN200	mm	201.0	457.0	502.0	228.5	253.0	708.0	215.0	785.0	345.0	380.0	50.0	54.0	14.0	F16	165.0	22x25	254	292	9273	8737				
8"	inch	7.91	17.99	19.76	9.0	9.96	27.87	8.46	30.91	13.58	14.96	1.97	2.13	0.55		6.50	(4 holes)	560	644	10720	10100				
DN250	mm	252.0	533.0	568.0	270.0	287.5	713.3	260.0	790.4	405.0	445.0	50.0	54.0	14.0	F25	254.0	18x25	404	474	15224	14792				
10"	inch	9.92	20.98	22.36	10.63	11.32	28.08	10.24	31.12	15.94	17.52	1.97	2.13	0.55		10.0	(8 holes)	891	1045	17600	17100				
DN300	mm	303.0	610.0	648.0	298.0	313.0	800.0	300.0	880.50	485.0	520.0	60.0	63.5	18.0	F25	254.0	18x25	594	671	23096	22404				
12"	inch	11.93	24.02	25.51	11.73	12.32	31.5	11.81	34.67	19.09	20.47	2.36	2.5	0.71		10.0	(8 holes)	1310	1479	26700	25900				

Cryogenic Trunnion Mounted Ball 2 Piece

Valve Dimensions

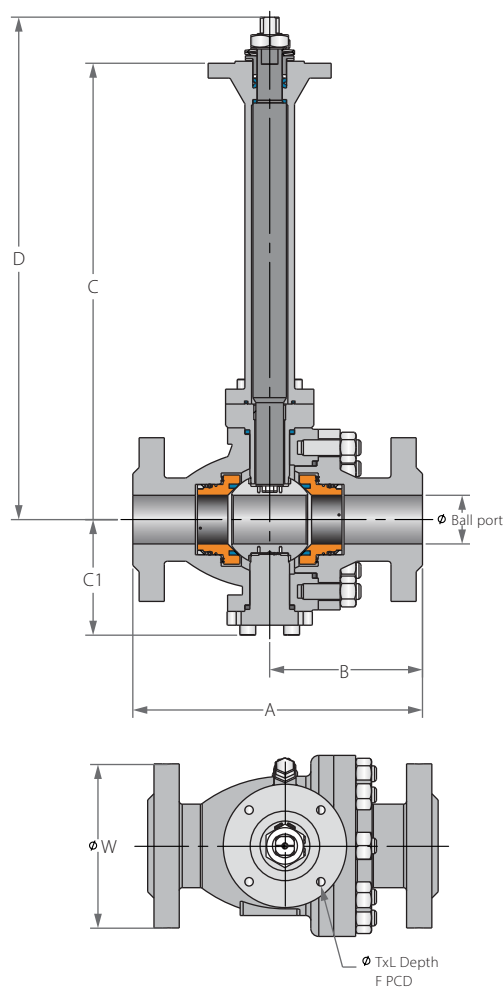

Preparation for actuation





Full port	Unit	Ball port	A	B	C	C1	D	W	M SQ	P SQ	F		TxL	Weight kg/lb	Kv
															Cv
DN50	mm	49.0	292.0	131.0	500.0	119.0	547.5	165.0	18.9	22.7	F10	102.0	M10X15 (4 holes)	43	329
2"	inch	1.93	11.5	5.16	19.69	4.69	21.56	6.5	0.74	0.89		4.02		95	380
DN80	mm	74.0	356.0	161.0	550.0	160.0	617.0	210.0	28.45	35.2	F12	125.0	M12X15 (4 holes)	84.5	874
3"	inch	2.91	14.02	6.34	21.65	6.3	24.29	8.27	1.12	1.39		4.92		186	1010
DN100	mm	100.0	432.0	216.0	600.0	184.0	712.6	275.0	35.9	43.5	F14	140.0	M16X20 (4 holes)	139	1557
4"	inch	3.94	17.01	8.50	23.62	7.24	28.06	10.83	1.41	1.71		5.51		306	1800
DN150	mm	150.0	559.0	278.0	624.5	214.5	737.1	355.0	35.9	43.5	F14	140.0	M16X20 (4 holes)	275	3893
6"	inch	5.91	22.01	10.94	24.59	8.44	29.02	13.98	1.41	1.71		5.51		606	4500




Cryogenic Trunnion Mounted Ball 2 Piece

Valve Dimensions

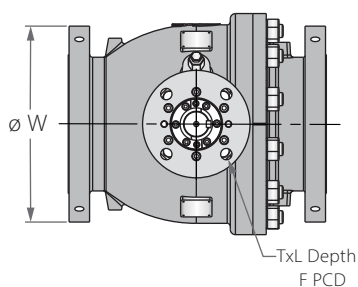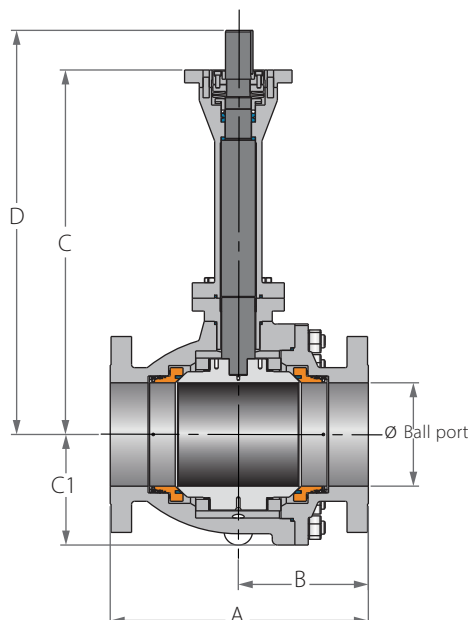

Preparation for actuation



Full port	Unit	Ball port	A	B	C	C1	D	W	P	M	K	F		TxL	Weight kg/lb	Kv Cv
DN200	mm	201.0	660.0	330.0	696.0	263.0	774.0	420.0	60.0	63.5	14.0	F25	254.0	18x25 (8 holes)	475	7742
8"	inch	7.91	25.98	12.99	27.4	10.35	30.47	16.54	2.36	2.5	0.55		10.0		1047	8950
DN250	mm	252.0	787.0	400.0	739.0	310.0	817.0	510.0	60.0	63.50	14.0	F25	254.0	18x35 (8 holes)	725	12543
10"	inch	9.92	30.98	15.75	29.09	12.2	32.17	20.08	2.36	2.50	0.55		10.0		1598	14500
DN300	mm	303.0	838.0	419.0	800.0	344.0	915.0	560.0	72.0	76.5	20.0	F25	254.0	18x35 (8 holes)	928	19809
12"	inch	11.93	32.99	16.50	31.50	13.54	36.02	22.05	2.83	3.01	0.79		10.0		2046	22900

C81

C82

C83


2"-6" | DN50-DN150

Cryogenic Trunnion Mounted Ball 2 Piece

Components & Materials

Item	Description	Material Spec. ASTM	Qty.
1	Body	Acc. Ordering Code	1
2	End	Acc. Ordering Code	1
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	2
5A*	Seat Insert	Acc. Ordering Code	2
5B*	Seat Seal	PTFE+Elgiloy, Graphite	2
6*	Body Seal	Graphite	1
7*	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
8	Seat Spring	Inconel 750	20-32
9*	Stem Seal	HermetiX TFM	1
10	Follower	S. Steel	1
10A*	Slide Bearing	S. Steel	1
12	Stem Nut	S. Steel	1
13	Tab Lock Washer	S. Steel	1
16	Ball Bearing	PMT 316	2
17	Ball Thrust Washer	PMT 316	1
18	Body Stud	ASTM A320-B8M	4-20
19	Body Nut	A194 8M	4-20
20	Anti-Static Spring	S. Steel	1
21	Gland Plate	A479 316/ 316L	1
22*	Gland Plate Seal	Graphite	1
22A*	Outer Trunnion Seal	Graphite	1
23	Gland Plate Bolts	ASTM A320-B8M	4-8
24*	Bonnet Seal	Graphite	1
25	Stem Bearing	PMT 316	1
26	Bonnet	S. Steel	1
27	Bonnet Pins	S. Steel	2
27A	Gland Pins	S. Steel	2
28	Bonnet Bolts	ASTM A320-B8M	4-8
36	Plug Drain/ Vent Valve	S. Steel	2
37	Tag (not shown)	S.Steel	1
38	Outer Trunnion	A479 316	1
39	Outer Trunnion Bolts	ASTM A320-B8M	4-8
40	Pipe Handle	S. Steel	1
40A	Stop Plate	S. Steel	1
40B	Wrench Head	S. Steel	1
41	Wrench Head Bolt	S. Steel	1
42	Stop Bolt	S. Steel	2
42A	Spring Washer	S. Steel	2
43	Sleeve	PCV	1

* Maintenance kit components

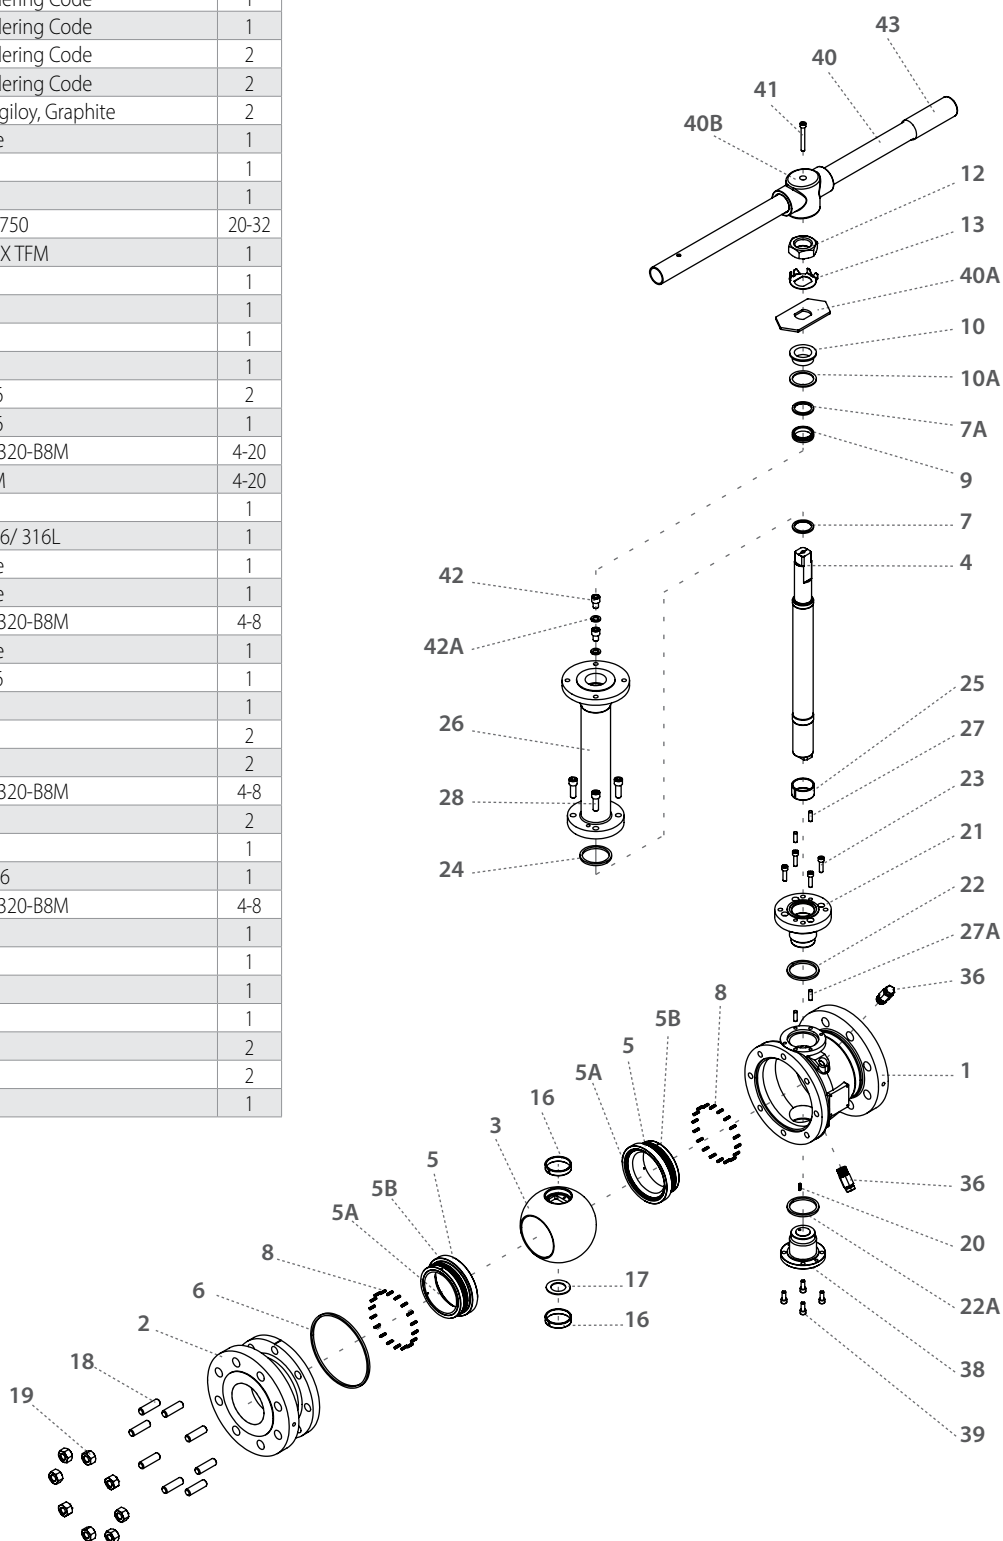




Cryogenic Trunnion Mounted Ball 2 Piece

Components & Materials

Item	Description	Material Spec. ASTM	Qty.
1	Body	Acc. Ordering Code	1
2	End	Acc. Ordering Code	1
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	2
5A*	Seat Insert	Acc. Ordering Code	2
5B*	Seat Seal	PTFE+Elgiloy, Graphite	2
6*	Body Seal	Graphite	1
7*	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
8	Seat Spring	Inconel X750	20-44
9*	Stem Seal	HermetiX TFM	1
10	Follower	S. Steel	1
10A	Slide Bearing	S. Steel	1
11	Disc Spring	S. Steel	2
12	Stem Key	S. Steel	1
13	Stem Key Bolt	S. Steel	1
14	Trunnion Plate	A479 316	2
15	Trunnion Plate Pin	S. Steel	8
16	Ball Bearing	PMT 316	2
17	Ball Thrust Washer	PMT 316	2
18	Body Stud	ASTM A320-B8M	8-20
19	Body Nut	A194 8M	8-20
20	Anti-Static Spring	S. Steel	1
21 ⁽¹⁾	Gland Plate	A479 316	1
22 ^{(1)*}	Gland Plate Seal	Graphite	1
23 ⁽¹⁾	Gland Plate Bolts	ASTM A320-B8M	6-8
24*	Bonnet Seal	Graphite	1
25	Stem Bearing	PMT 316	1
26	Bonnet	S. Steel	1
27	Bonnet Pin	S. Steel	4-6
28	Bonnet Bolts	ASTM A320-B8M	4-8
29	Bot Follower	A479 316	2
30	Bot Follower Bolt	ASTM A320-B8M	2
31	Top Follower	A479 316	2
32	Top Follower Drive Bolt	ASTM A320-B8M	6-8
33	Top Follower Bolt	ASTM A320-B8M	2
34	Iso Plate	A479 316	1
35	Iso Plate Bolt	ASTM A320-B8M	4-8
36	Plug Drain/ Vent Valve	S. Steel	2
37	Tag (not shown)	S.Steel	1-2

* Maintenance kit components

⁽¹⁾ At 8" size

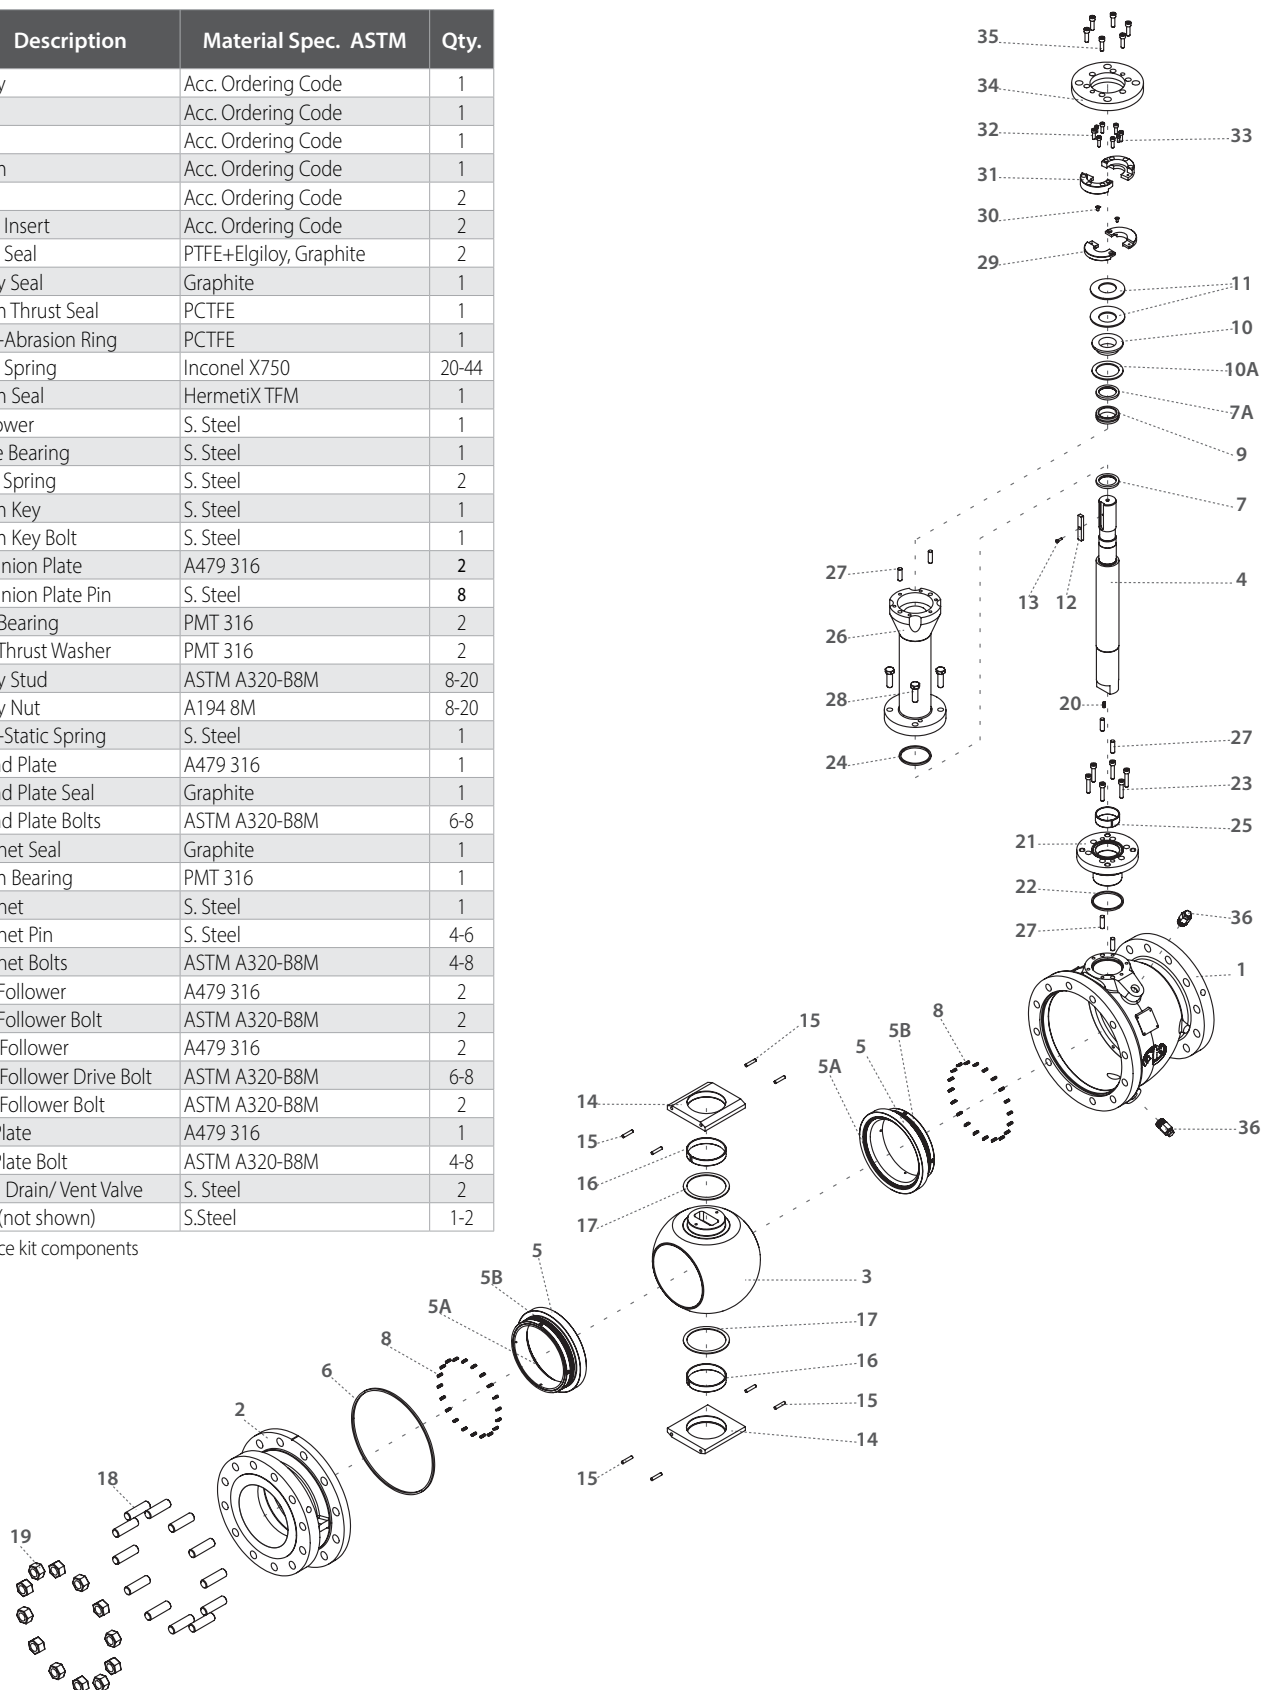



Cryogenic Trunnion Mounted Ball 2 Piece - Ordering Code System

"Mandatory option" options are marked with **green background** | "Standard offer" options are marked with **light green background**

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	.	.	30
8	0		F	C	B	8	1	W	-	6	M	6	S	C	A	G	/	1	5	0						
Size		Features				Series		Design		Body & ends	Stem	Ball & seat ring	Seat feature	Seat insert	Inner Seal	Outer Seal	End connection				Special features					

Size (1-2)		
Code	inch	mm
20	2"	50
30	3"	80
40	4"	100
60	6"	150
80	8"	200
A0	10"	250
A2	12"	300

Features (3-6)	
C	Cryogenic design
B	Full port
F	Fire safe

Series (7-8)	
81	ASME B16.5 #150 Flanged RF
82	ASME B16.5 #300 Flanged RF
83	ASME B16.5 #600 Flanged RF

Design (9)	
W	Total HermetiX Integrity package

Body & ends material (11)	
6	S. Steel

Stem material (12)	
M	High Strength S. Steel

Ball & seat ring material (13)	
6	S. Steel

Seat feature (14)	
S	Single Piston Effect (SPE) (API 6D DBB)

Seat insert (15)	
C	PCTFE

Inner Seal (16)	
A	TFM

Outer Seal (17)	
G	Graphite

End Connection (19-22)	
150	ASME B16.5 #150 RF
300	ASME B16.5 #300 RF
600	ASME B16.5 #600 RF

C47

C47-BD

C26


C26-BD



Cryogenic Valves


FLOATING BALL

3 PIECE

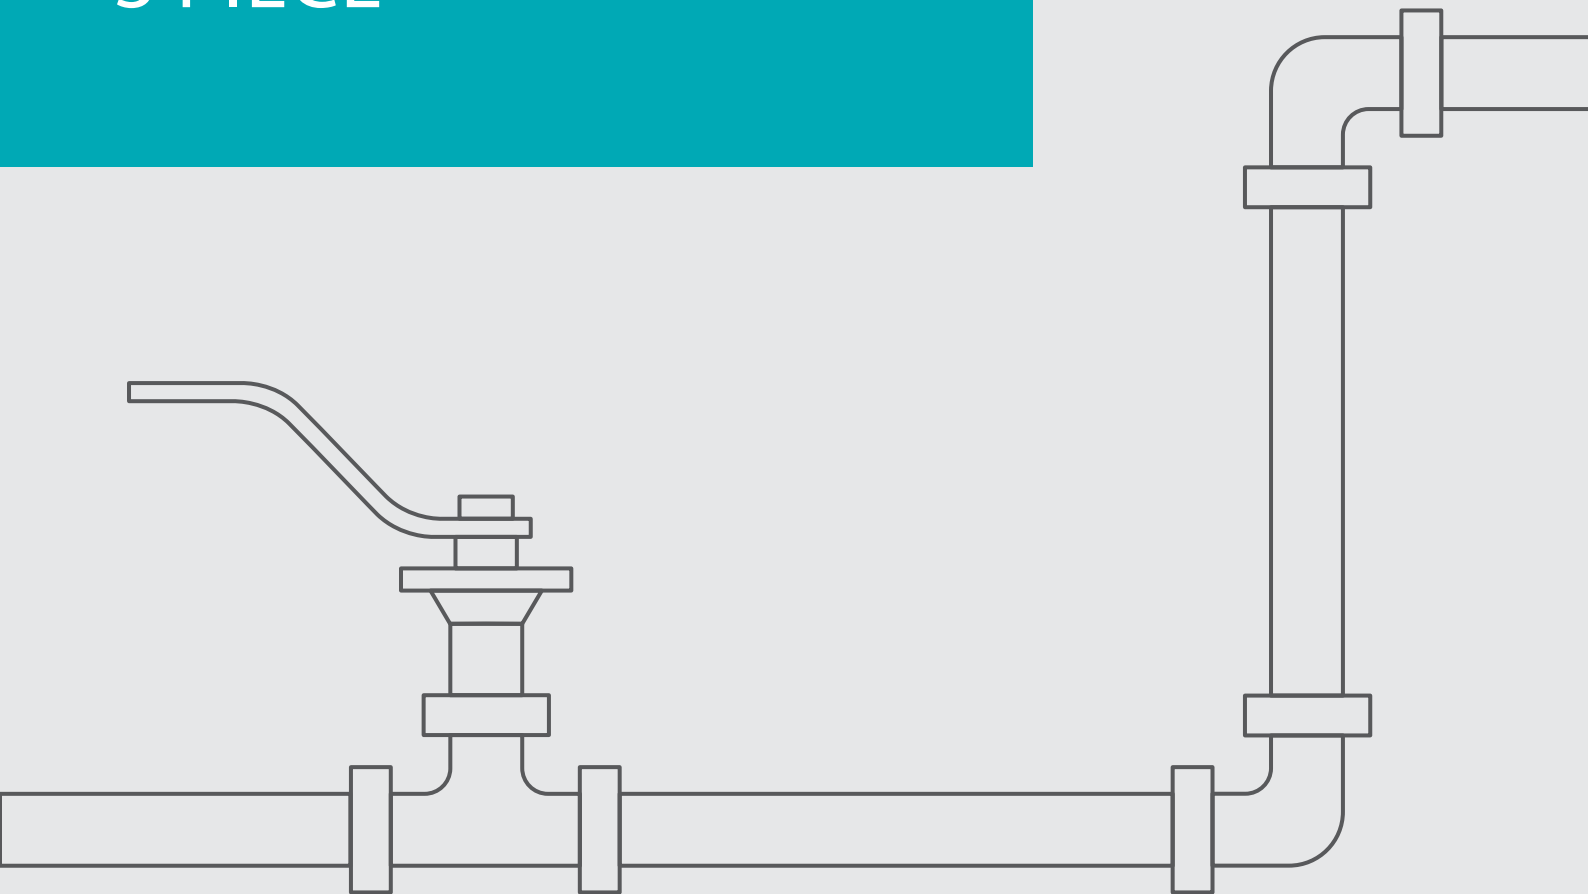


Cryogenic Floating Ball 3 Piece

Valve Dimensions

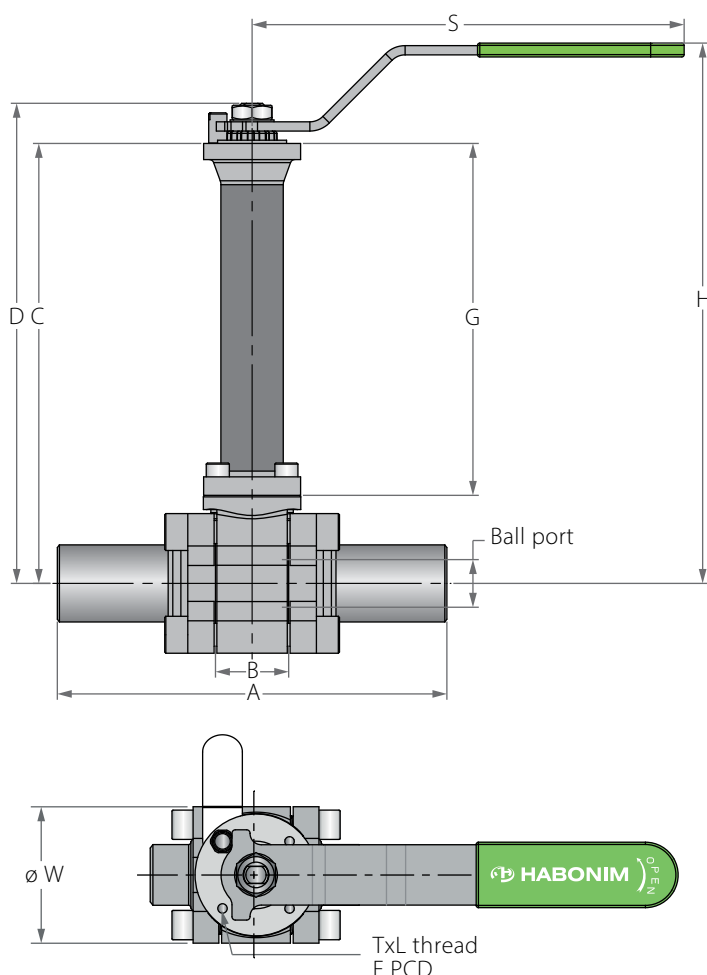

Preparation for actuation

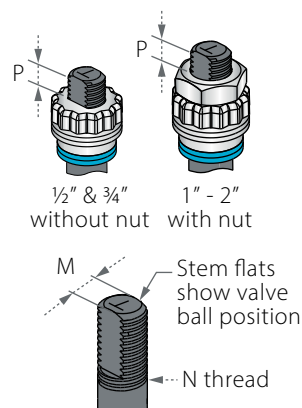


Valve Face To Face sizes are according to Habonim catalog data only, for Extended-weld/Flanged/Tri-clamp end see Face To Face sizes page.

Std. port	Full port	Unit	Ball port	A	B	Standard design				6" bonnet				S	W	M	N	P	F	TxL	Weight kg/lb		Kv
						C	D	H	G	C	D	H	G								Std.	6"	
	DN8	mm	11.15	65.8	20.6	333.0	341.9	366.0	304.0	181.4	190.3	214.4	152.4	150.0	4.6	5.5	3/8"	7.20	36.0	M5X7	1.60	1.28	2.6
	1/4"	inch	0.44	2.59	0.81	13.11	13.46	14.41	11.97	7.14	7.49	8.44	6.0	5.91	1.81	0.22	UNF	0.28	1.42	M5X7	3.53	2.82	3.0
DN15	DN10	mm	11.15	65.8	20.6	333.0	341.9	366.0	304.0	181.4	190.3	214.4	152.4	150.0	46.0	5.5	3/8"	7.20	36.0	M5X7	1.6	1.28	7
1/2"	3/8"	inch	0.44	2.59	0.81	13.11	13.46	14.41	11.97	7.14	7.49	8.44	6.0	5.91	1.81	0.22	UNF	0.28	1.42	M5X7	3.53	2.82	8
DN20	DN15	mm	14.3	70.55	24.55	335.4	344.3	368.0	304.0	183.8	192.7	216.4	152.4	150.0	52.0	5.5	3/8"	7.20	36.0	M5X7	1.8	1.48	10
3/4"	1/2"	inch	0.56	2.78	0.97	13.2	13.56	14.49	11.97	7.24	7.59	8.52	6.0	5.91	2.05	0.22	UNF	0.28	1.42	M5X7	3.97	3.26	12
DN25	DN20	mm	20.6	93.65	31.75	342.15	359.65	383.0	304.0	190.55	208.05	231.4	152.4	187.0	60.5	7.54	7/8"	7.20	42.0	M5X7	3	2.65	28
1"	3/4"	inch	0.81	3.69	1.25	13.47	14.16	15.08	11.97	7.50	8.19	9.11	6.0	7.32	2.38	0.3	UNF	0.28	1.65	M5X7	6.61	5.84	32
DN32	DN25	mm	25.4	108.25	41.25	346.65	364.15	388.0	304.0	195.05	212.55	236.4	152.4	187.0	69.0	7.54	7/8"	7.2	42.0	M5X10	3.7	3.35	37
1 1/4"	1"	inch	1.0	4.25	1.62	13.65	14.34	15.28	11.97	7.68	8.37	9.31	6.0	7.32	2.72	0.30	UNF	0.28	1.65	M5X10	8.16	7.39	43
DN40	DN32	mm	31.8	115.45	48.25	347.55	377.05	400.0	304.0	195.95	225.45	248.40	152.40	237.0	79.20	8.71	1"	8.0	50.0	M6X8	5.2	4.65	70
1 1/2"	1 1/4"	inch	1.25	4.55	1.90	13.68	14.84	15.75	11.97	7.71	8.88	9.78	6.0	9.29	3.12	0.34	UNF	0.31	1.97	M6X8	11.46	10.25	81
DN50	DN40	mm	38.1	127.10	56.3	352.25	381.75	405.0	304.0	200.65	230.15	253.4	152.4	237.0	90.7	8.71	1"	8.5	50.0	M6X8	6.1	5.53	103
2"	1 1/2"	inch	1.5	5.0	2.22	13.87	15.03	15.94	11.97	7.9	9.06	9.98	6.0	9.29	3.57	0.34	UNF	0.33	1.97	M6X8	13.45	12.19	119



Components & Materials

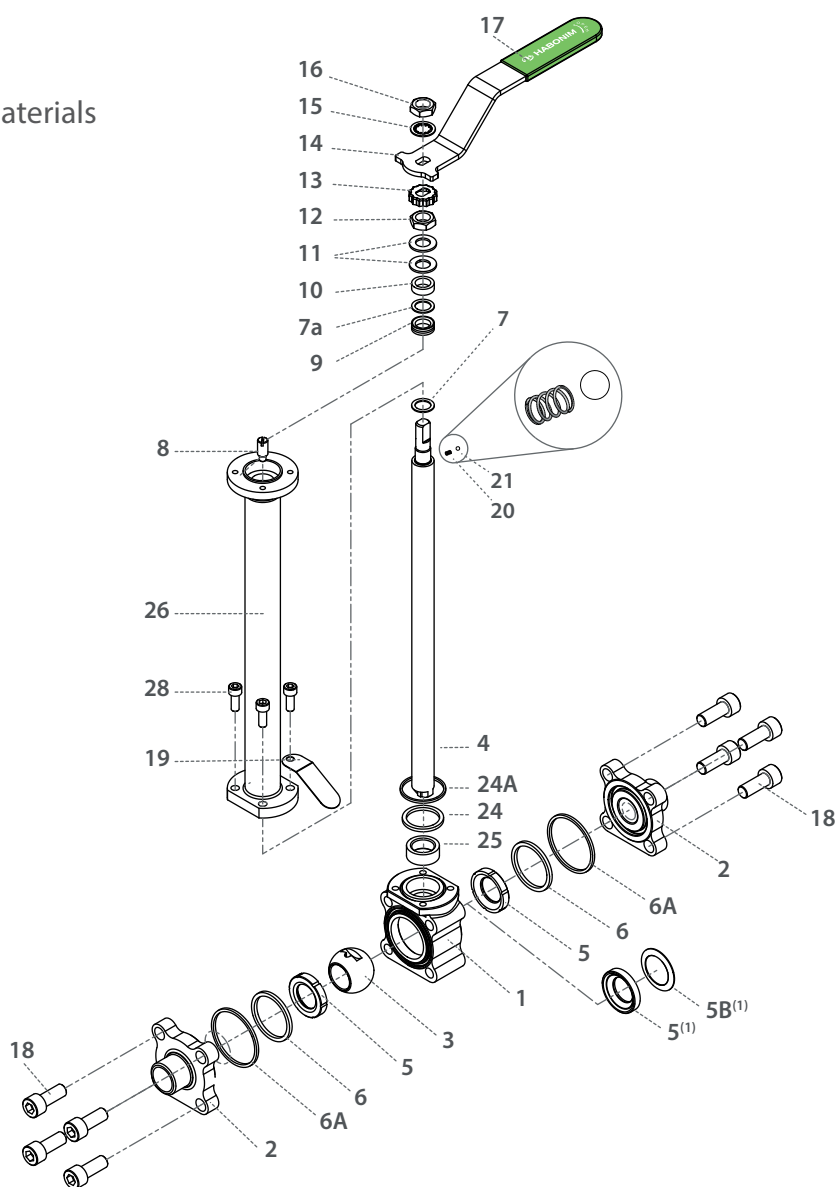

Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	End	Acc. Ordering Code	2
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	2
6*	Inner Seal	TFM	2
6A*	Outer Seal	Acc. Ordering Code	2
7*	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
8	Stop Pin	S. Steel	1
9*	Stem Seal	TFM	1
10	Follower	S. Steel	1
10A	Slide Bearing	S. Steel	1
11	Disc Spring	S. Steel	2
12	Stem Nut	S. Steel	1
13	Locking Clip	S. Steel	1



Item	Description	Material specifications	Qty.
14	Handle	S. Steel	1
15	Serrated Washer	S. Steel	1
16	Handle Nut	S. Steel	1
17	Sleeve	PVC	1
18	Body Bolt	S. Steel	8
20	Anti-Static Spring	S. Steel	1
21	Anti-Static Plunger	S. Steel	1
22	Arrow Flow	S. Steel	2
23	Tag (not shown)	S. Steel	1
24*	Bonnet Inner Seal	TFM	1
24A*	Bonnet Outer Seal	Acc. Ordering Code	1
25*	Stem Bearing	PTFE	1
26	Bonnet	S. Steel	1
28	Bolt	S. Steel	4
30	Dog Tag	S. Steel	1

* Maintenance kit components

⁽¹⁾ Optional Dynamic seat design

Cryogenic Floating Ball 3 Piece

Valve Dimensions

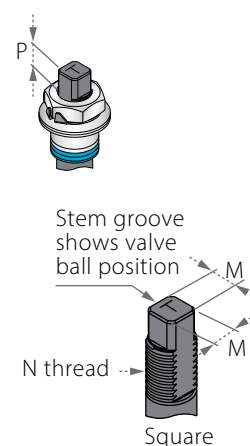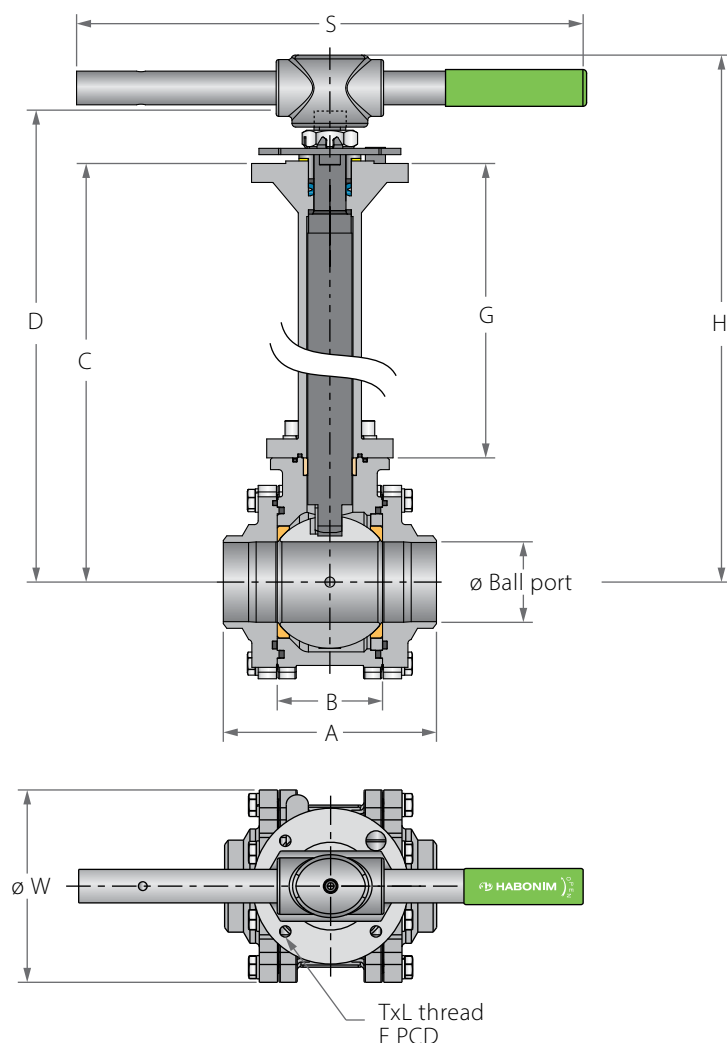


Valve Face To Face sizes are according to Habonim catalog data only, for Extended-weld/Flanged/Tri-clamp end see Face To Face sizes page.

Std. port	Full port	Unit	Ball port	A	B	Standard design				6" bonnet				S	W	M	MDD	N	P	F		TxL	Weight kg/lb		Kv
						C	D	H	G	C	D	H	G										Std.	6"	Cv
DN65	DN50	mm	50.80	157.95	72.55	397.5	439.1	464.0	327.5	222.4	264.0	288.9	152.4	401.0	108.0	13.9	13.9	M20x2.5	13.15	F07	70.0	M8x8	12	10.6	205
2½"	2"	inch	2.0	6.22	2.86	15.65	17.29	18.27	12.89	8.76	10.39	11.37	6.0	15.79	4.25	0.55	0.55		0.52		2.76		26.46	23.37	240
DN80	DN65	mm	63.5	169.35	83.25	441.8	488.4	528.0	343.5	250.7	297.3	336.9	152.4	401.0	153.0	18.9	15.9	1"-14	16.7	F10	102.0	M10x15	20	18.8	385
3"	2½"	inch	2.5	6.67	3.28	17.39	19.23	20.79	13.52	9.87	11.7	13.26	6.0	15.79	6.02	0.74	0.63	UNS-2A	0.66		4.02		44.09	41.45	450
DN100	DN80	mm	82.6	213.6	108.8	457.6	504.2	544.0	343.5	266.5	313.1	352.9	152.4	610.0	191.5	18.9	15.9	1"-14	16.7	F10	102.0	M10x15	30.5	29.3	615
4"	3"	inch	3.25	8.41	4.28	18.02	19.85	21.42	13.52	10.49	12.33	13.89	6.0	24.02	7.54	0.74	0.63	UNS-2A	0.66		4.02		67.24	64.6	720
	DN100	mm	100.0	239.0	123.0	466.8	513.4	555.0	343.5	275.7	322.3	363.9	152.4	610.0	217.0	18.9	15.9	1"-14	16.7	F10	102.0	M10x15	37.3	36.1	744
	4"	Inch	3.94	9.41	4.84	18.38	20.21	21.85	13.52	10.85	12.69	14.33	6.0	24.02	8.54	0.74	0.63	UNS-2A	0.66		4.02		82.23	79.59	870
DN150		mm	111.1	346.1	146.1	542.4	611.9	665.0	385.0	309.8	379.3	432.4	152.4	916.0	266.0	28.45	23.75	1½"-12	26.2	F12	125.0	M12x15	75	71	872
6"		inch	4.37	13.63	5.75	21.35	24.09	26.18	15.16	12.2	14.93	17.02	6.0	36.06	10.47	1.12	0.94	UNS-1A	1.03		4.92		165.35	156.53	1020
	DN150	mm	150.0	322	180.0	564.0	633.5	686.6	385.0	331.4	400.9	545	152.4	916.0	328.0	28.45	23.75	1½"-12	26.2	F12	125.0	M12x15	106	104	4360
	6"	inch	5.91	12.68	7.09	22.20	24.94	27.03	15.16	13.05	15.78	17.87	6.0	36.06	12.91	1.12	0.94	UNS-1A	1.03		4.92		233	229	5040



Components & Materials

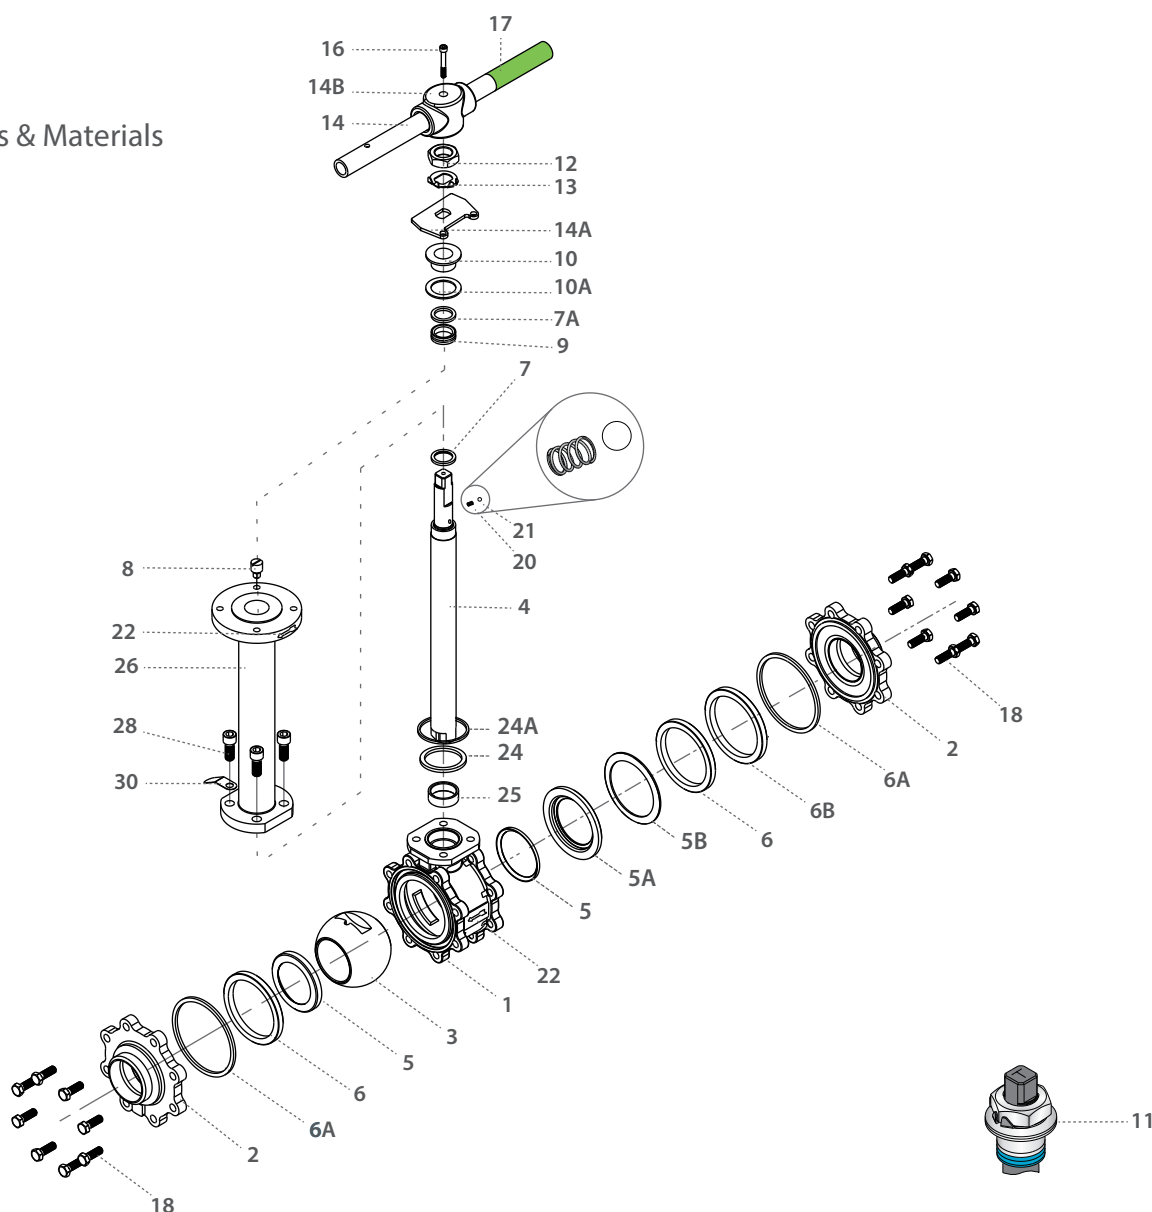

Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	End	Acc. Ordering Code	2
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	2
5A	Seat Housing	S. Steel	1
5B	Upstream Seat Spring	Inconel 718	1
6*	Inner Seal	TFM	2
6A*	Outer Seal	Acc. Ordering Code	2
6B	Support Ring	S. Steel	1
7*	Stem Thrust Seal	TFM, PCTFE	1
7A*	Anti-Abrasion Ring	TFM, PCTFE	1
8	Stop Pin	S. Steel	1
9*	Stem Seal	TFM, Graphite	1
10	Follower	S. Steel	1
10A*	Slide Bearing	S. Steel	1
11	Disc Spring	S. Steel	2
12	Stem Nut	S. Steel	1

Item	Description	Material specifications	Qty.
13	Tab Lock Washer	S. Steel	1
14	Handle	S. Steel	1
14A	Stop Plate	S. Steel	1
14B	Wrench Head	S. Steel	1
16	Wrench Bolt	S. Steel	1
17	Sleeve	PVC	1
18	Body Bolt	S. Steel	8
20	Anti-Static Spring	S. Steel	2
21	Anti-Static Plunger	S. Steel	2
22	Arrow Flow	S. Steel	2
23	Tag (Not Shown)	S. Steel	1
24*	Bonnet Inner Seal	TFM	1
24A*	Bonnet Outer Seal	Acc. Ordering Code	1
25*	Stem Bearing	PTFE	1
26	Bonnet	S. Steel	1
28	Bolt	S. Steel	4
30	Dog Tag	S. Steel	1

* Maintenance kit components



Cryogenic Floating Ball 3 Piece - Ordering Code System

"Mandatory option" options are marked with **green background** | "Standard offer" options are marked with **light green background**

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	.	.	30
1	5			F	C	4	7	W	-	6	6	6	M	A	A	G	/	B	W			-				
Size		Features			Series		Design	Body material		Ends material	Ball material	Stem material	Seat material	Inner Seal	Outer Seal	End connection			Special features							

Size (1-2)		
Code	inch	mm
02	¼"	8
03	⅜"	10
05	½"	15
07	¾"	20
10	1"	25
12	1¼"	32
15	1½"	40
20	2"	50
25	2½"	65
30	3"	80
40	4"	100
60	6"	150

Features (3-6)	
C	Cryogenic design
F	Fire safe
B	Full port
N	Control service
H *	Hydrogen Service

* For material selection - see Hydrogen Service chapter

Series (7-8)	
47	3 Piece Floating
Design (9)	
W	Total HermetiX Integrity package
Body material (11)	
6	CF8M
7	Monel
W	Hastelloy-C22

End material (12)	
6	CF3M
7	Monel

Ball material (13)	
6	S. Steel
1	Bronze
7	Monel

Stem material (14)	
M	High Strength S. Steel
6	S. Steel
Z	Inconel

Seat material (15)	
A	TFM
C	PCTFE
P	CF PTFE

Inner Seal Material (16)	
A	TFM
G	Expanded graphite

Outer Seal Material (17)	
G	Expanded graphite
A	TFM

End connections (19-22)	
Welded	
BW10	Buttweld schd. 10
BW	Buttweld schd. 40
XBW10	Extended buttweld schd. 10
XBW	Extended buttweld schd. 40
BW5	Buttweld schd. 5
BW80	Buttweld schd. 80
BWO *	Buttweld tube OD
BWD	Buttweld DIN 11860
BW1.6	buttweld ISO 1127 1.6mm
BW12.0	buttweld ISO 1127 2.0mm
BW12.3	buttweld ISO 1127 2.3mm
SW	Socket weld
SWO *	Socket weld tube OD
XBW80	Extended buttweld 80
XSW	Extended socket weld
ETO *	Extended tube OD
ETI1.6	Extended buttweld ISO 1127 1.6mm
ETI2.0	Extended buttweld ISO 1127 2.0mm
ETI2.3	Extended buttweld ISO 1127 2.3mm
ETD	Extended buttweld DIN 11850

* Std. port only

Threaded	
NPT	ASME B1.20.1 - National Pipe Taper thread
MNPT	Male NPT
BSPT	EN 10226 - Pipe Taper thread
MBSPT	Male BSPT
BSPP	ISO228-1, DIN3852 - Pipe parallel thread
DIN3852	DIN3852 - Pipe Parallel thread
AS5202	SAE internal straight thread

Flanged	
150	ASME B16.5 #150 RF
300	ASME B16.5 #300 RF
600	ASME B16.5 #600 RF
900	ASME B16.5 #900 RF
PN16	EN1092 PN16 RF
PN40	EN1092 PN40 RF
PN63	EN1092 PN63 RF
PN100	EN1092 PN100 RF
PN160	EN1092 PN160 RF

Clamp	
GR**	Grayloc® compatible hub (Grayloc® is a registered trademark of Grayloc Products, L.L.C.)
TC *	Tri-Clamp
LL *	Compression fitting (Imperial) - No nuts & Ferrules
LM *	Compression fitting (metric) - No nuts & Ferrules
LL-NF *	Compression fitting (Imperial) - with nuts & Ferrules
LM-NF *	Compression fitting (metric) - with nuts & Ferrules

* Std. port only

** Not available for 1¼" (DN32) Valves

Special Features (24-30)	
SPR	Spring loaded seat, valve 2½" Full port and up
6.0	Short bonnet
B	Body made from rolled bar
BSQ	Body made from square bar
SPR	Spring loaded seat, up to 2½" std. port
RJT	Ring Type Joint
EP	Electropolished
Vxx	V port, xx=angle
G...	Internal surface finish(G24, G32)
VBxx	Characterized control ball, xx=angle
FF	Flat face
TPED	TPED / TPE




Cryogenic Floating Ball 3 Piece; BD - Bidirectional

PATENTED

US 11009136


Valve Dimensions

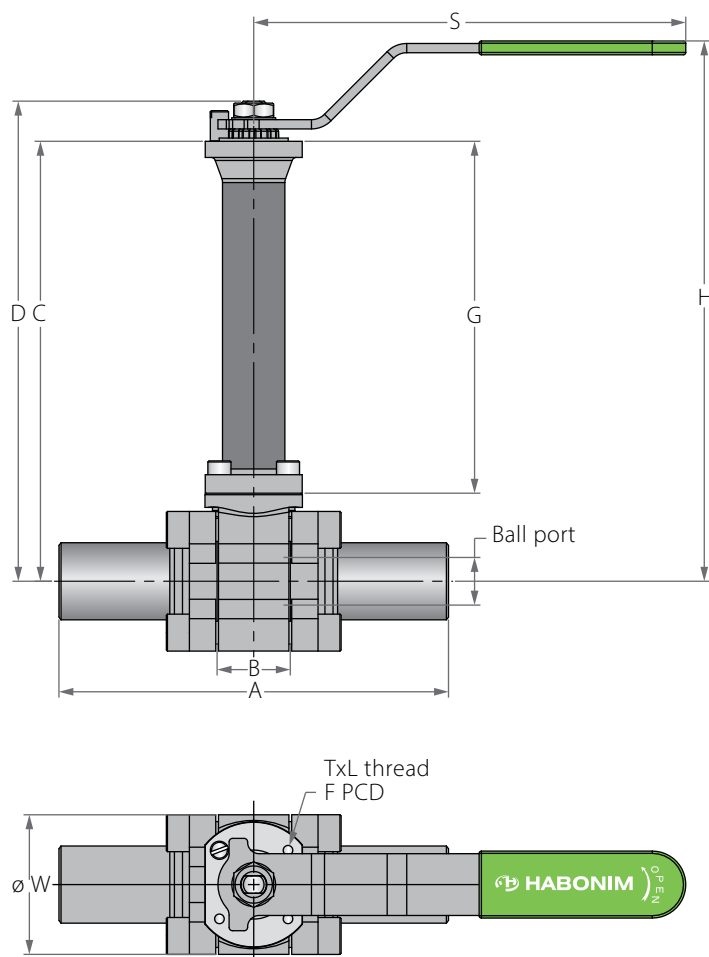

Bidirectional Cryogenic floating ball Valve

- Cryogenic floating ball valves with bidirectional sealing capability allows it to be used on a bidirectional loading and offloading single pipeline as well as a shutoff valve for a storage tank, developing back pressure to the downstream side while empty without upstream line pressure.
- These valves are equipped with all the benefits of the standard cryogenic ball valve on top of the simplicity and flow capabilities of a floating ball design.
- Full Δp
- ASME Class 300
- Special "Piston Effect" at seat design to prevent pressure buildup in the cavity.

Preparation for actuation

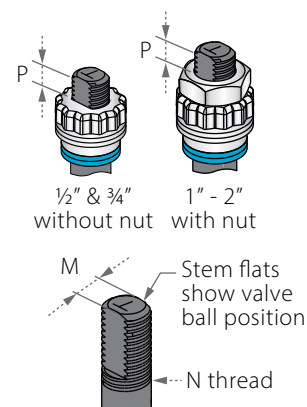


Valve Face To Face sizes are according to Habonim catalog data only, for Extended-weld/Flanged/Tri-clamp end see Face To Face sizes page.

Std. port	Full port	Unit	Ball port	A	B	Standard design				6" bonnet				S	W	M	N	P	F	TxL	Weight kg/lb			Kv
						C	D	H	G	C	D	H	G								Std.	6"	Cv	
	DN8	mm	11.15	65.8	20.6	333.0	341.9	366.0	304.0	181.4	190.3	214.4	152.4	150.0	4.6	5.5	3/8"	7.20	36.0	M5X7	1.60	1.28	2.6	
	1/4"	inch	0.44	2.59	0.81	13.11	13.46	14.41	11.97	7.14	7.49	8.44	6.0	5.91	1.81	0.22	UNF	0.28	1.42	M5X7	3.53	2.82	3	
DN15	DN10	mm	11.15	65.8	20.6	333.0	341.9	366.0	304.0	181.4	190.3	214.4	152.4	150.0	46.0	5.5	3/8"	7.20	36.0	M5X7	1.6	1.28	7	
1/2"	3/8"	inch	0.44	2.59	0.81	13.11	13.46	14.41	11.97	7.14	7.49	8.44	6.0	5.91	1.81	0.22	UNF	0.28	1.42	M5X7	3.53	2.82	8	
DN20	DN15	mm	14.3	70.55	24.55	335.4	344.3	368.0	304.0	183.8	192.7	216.4	152.4	150.0	52.0	5.5	3/8"	7.20	36.0	M5X7	1.8	1.48	10	
3/4"	1/2"	inch	0.56	2.78	0.97	13.2	13.56	14.49	11.97	7.24	7.59	8.52	6.0	5.91	2.05	0.22	UNF	0.28	1.42	M5X7	3.97	3.26	12	
DN25	DN20	mm	20.6	93.65	31.75	342.15	359.65	383.0	304.0	190.55	208.05	231.4	152.4	187.0	60.5	7.54	7/8"	7.20	42.0	M5X7	3.0	2.65	28	
1"	3/4"	inch	0.81	3.69	1.25	13.47	14.16	15.08	11.97	7.50	8.19	9.11	6.0	7.32	2.38	0.3	UNF	0.28	1.65	M5X7	6.61	5.84	32	
DN32	DN25	mm	25.4	108.25	41.25	346.65	364.15	388.0	304.0	195.05	212.55	236.4	152.4	187.0	69.0	7.54	7/8"	7.2	42.0	M5X10	3.7	3.35	37	
1 1/4"	1"	inch	1.0	4.25	1.62	13.65	14.34	15.28	11.97	7.68	8.37	9.31	6.0	7.32	2.72	0.30	UNF	0.28	1.65	M5X10	8.16	7.39	43	
DN40	DN32	mm	31.8	115.45	48.25	347.55	377.05	400.0	304.0	195.95	225.45	248.40	152.40	237.0	79.20	8.71	1 1/8"	8.0	50.0	M6X8	5.2	4.65	70	
1 1/2"	1 1/4"	inch	1.25	4.55	1.90	13.68	14.84	15.75	11.97	7.71	8.88	9.78	6.0	9.29	3.12	0.34	UNF	0.31	1.97	M6X8	11.46	10.25	81	
DN50	DN40	mm	38.1	127.10	56.3	352.25	381.75	405.0	304.0	200.65	230.15	253.4	152.4	237.0	90.7	8.71	1 1/8"	8.5	50.0	M6X8	6.1	5.53	103	
2"	1 1/2"	inch	1.5	5.0	2.22	13.87	15.03	15.94	11.97	7.9	9.06	9.98	6.0	9.29	3.57	0.34	UNF	0.33	1.97	M6X8	13.45	12.19	119	



PATENTED
US 11009136

Components & Materials

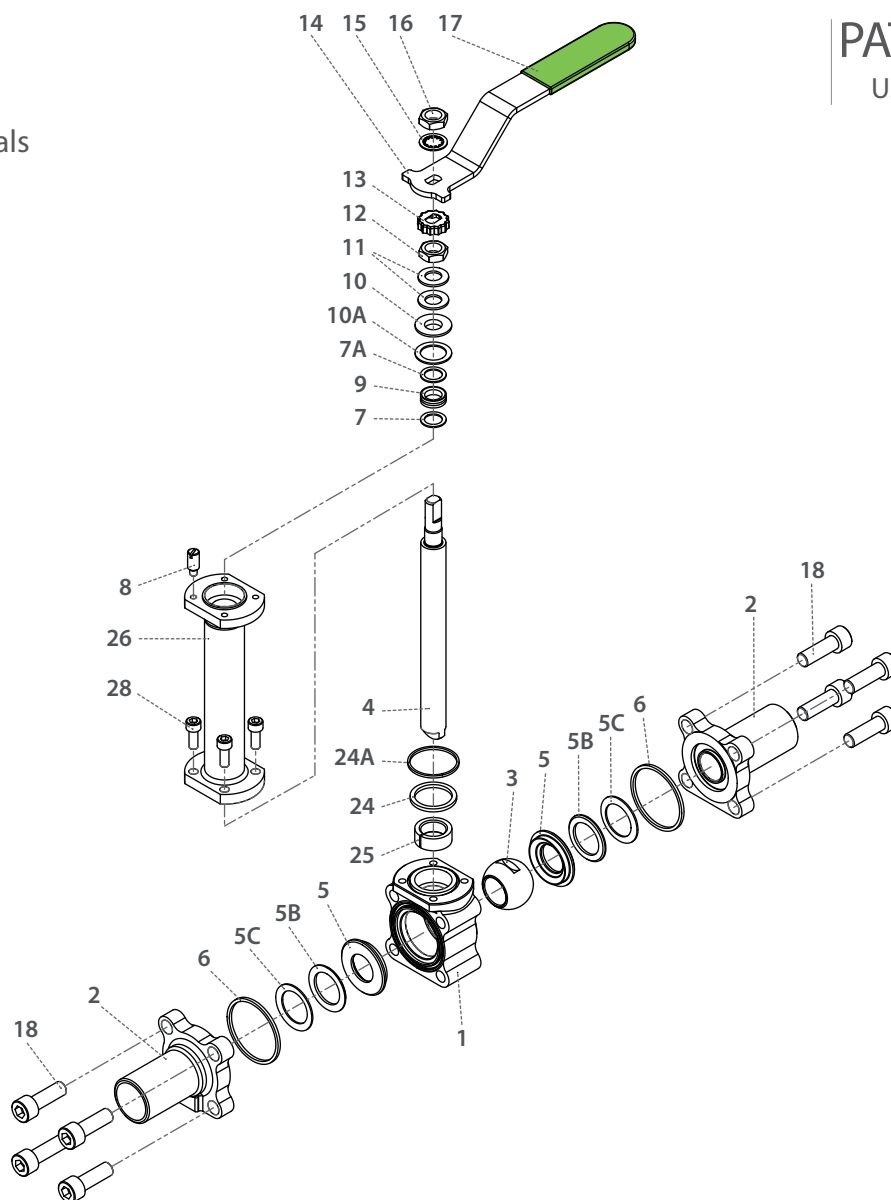

Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	Ends	Acc. Ordering Code	2
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	2
5B	Seat ring	S. Steel	1
5C	Seat Spring	Inconel 718	1
6	Seal	Acc. Ordering Code	1
7	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
8	Stop Pin	S. Steel	1
9*	Stem Seal	TFM	1
10	Follower	S. Steel	1
10A*	Slide Bearing	S. Steel	1

Item	Description	Material specifications	Qty.
11	Disc Spring	S. Steel	2
12	Stem Nut	S. Steel	1
13	Locking Clip	S. Steel	1
14	Handle	S. Steel	1
15	Serrated Washer	S. Steel	1
16	Handle Nut	S. Steel	1
17	Sleeve	PVC	1
18	Body Bolts	S. Steel	8
24*	Bonnet Inner Seal	TFM	1
24A*	Bonnet Outer Seal	Expanded raphite	1
25*	Stem Bearing	PTFE	1
26	Bonnet	Steel 316	1
28	Bolt	S. Steel	4


* Maintenance kit components

Cryogenic Floating Ball 3 Piece ; BD - Bidirectional

PATENTED

US 12044333


Valve Dimensions

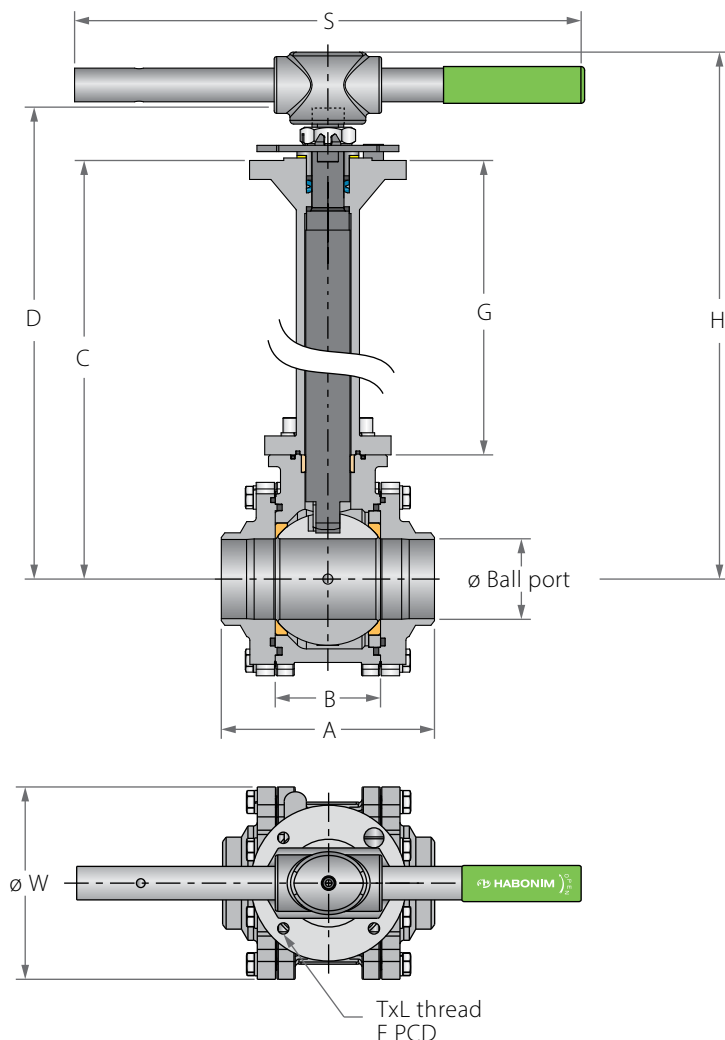

Bidirectional Cryogenic floating ball Valve

- Cryogenic floating ball valves with bidirectional full Δp sealing capability allows it to be used on a bidirectional loading and offloading single pipeline as well as a shutoff valve for a storage tank, developing back pressure to the downstream side while empty without upstream line pressure.
- These valves are equipped with all the benefits of the standard cryogenic ball valve on top of the simplicity and flow capabilities of a floating ball design.
- Full Δp
- Ball with integrated pressure relief device to release any exceeding cavity pressure.

Preparation for actuation

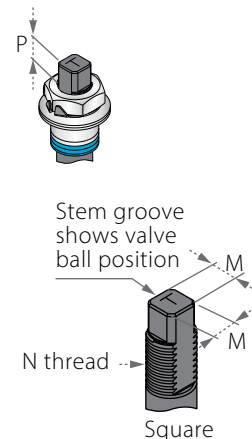


Valve Face To Face sizes are according to Habonim catalog data only, for Extended-weld/Flanged/Tri-clamp end see Face To Face sizes page.

Std. port	Full port	Unit	Ball port	A	B	Standard design				6" bonnet				S	W	M	MDD	N	P	F	TxL	Weight kg/lb			Kv
						C	D	H	G	C	D	H	G									Std.	6"	Cv	
DN65	DN50	mm	50.80	157.95	72.55	397.5	439.1	464.0	327.5	222.4	264.0	288.9	152.4	401.0	108.0	13.9	13.9	M20x2.5	13.15	F07	70.0	M8x8	12	10.6	205
2½"	2"	inch	2.0	6.22	2.86	15.65	17.29	18.27	12.89	8.76	10.39	11.37	6.0	15.79	4.25	0.55	0.55		0.52		2.76		26.46	23.37	240
DN80	DN65	mm	63.5	169.35	83.25	441.8	488.4	528.0	343.5	250.7	297.3	336.9	152.4	401.0	153.0	18.9	15.9	1"-14	16.7	F10	102.0	M10x15	20	18.8	385
3"	2½"	inch	2.5	6.67	3.28	17.39	19.23	20.79	13.52	9.87	11.7	13.26	6.0	15.79	6.02	0.74	0.63	UNS-2A	0.66		4.02		44.09	41.45	450
DN100	DN80	mm	82.6	213.6	108.8	457.6	504.2	544.0	343.5	266.5	313.1	352.9	152.4	610.0	191.5	18.9	15.9	1"-14	16.7	F10	102.0	M10x15	30.5	29.3	615
4"	3"	inch	3.25	8.41	4.28	18.02	19.85	21.42	13.52	10.49	12.33	13.89	6.0	24.02	7.54	0.74	0.63	UNS-2A	0.66		4.02		67.24	64.6	720
	DN100	mm	100.0	239.0	123.0	466.8	513.4	555.0	343.5	275.7	322.3	363.9	152.4	610.0	217.0	18.9	15.9	1"-14	16.7	F10	102.0	M10x15	37.3	36.1	744
	4"	inch	3.94	9.41	4.84	18.38	20.21	21.85	13.52	10.85	12.69	14.33	6.0	24.02	8.54	0.74	0.63	UNS-2A	0.66		4.02		82.23	79.59	870
DN150		mm	111.1	346.1	146.1	542.4	611.9	665.0	385.0	309.8	379.3	432.4	152.4	916.0	266.0	28.45	23.75	1½"-12	26.2	F12	125.0	M12x15	75	71	872
6"		inch	4.37	13.63	5.75	21.35	24.09	26.18	15.16	12.2	14.93	17.02	6.0	36.06	10.47	1.12	0.94	UNS-1A	1.03		4.92		165.35	156.53	1020
	DN150	mm	150.0	322.0	180.0	564.0	633.5	686.6	385.0	331.4	400.9	545.0	152.4	916.0	328.0	28.45	23.75	1½"-12	26.2	F12	125.0	M12x15	106	104	23.75
	6"	inch	5.91	12.68	7.09	22.20	24.94	27.03	15.16	13.05	15.78	17.87	6.0	36.06	12.91	1.12	0.94	UNS-1A	1.03		4.92		233	229	0.94



PATENTED
US 12044333

Components & Materials

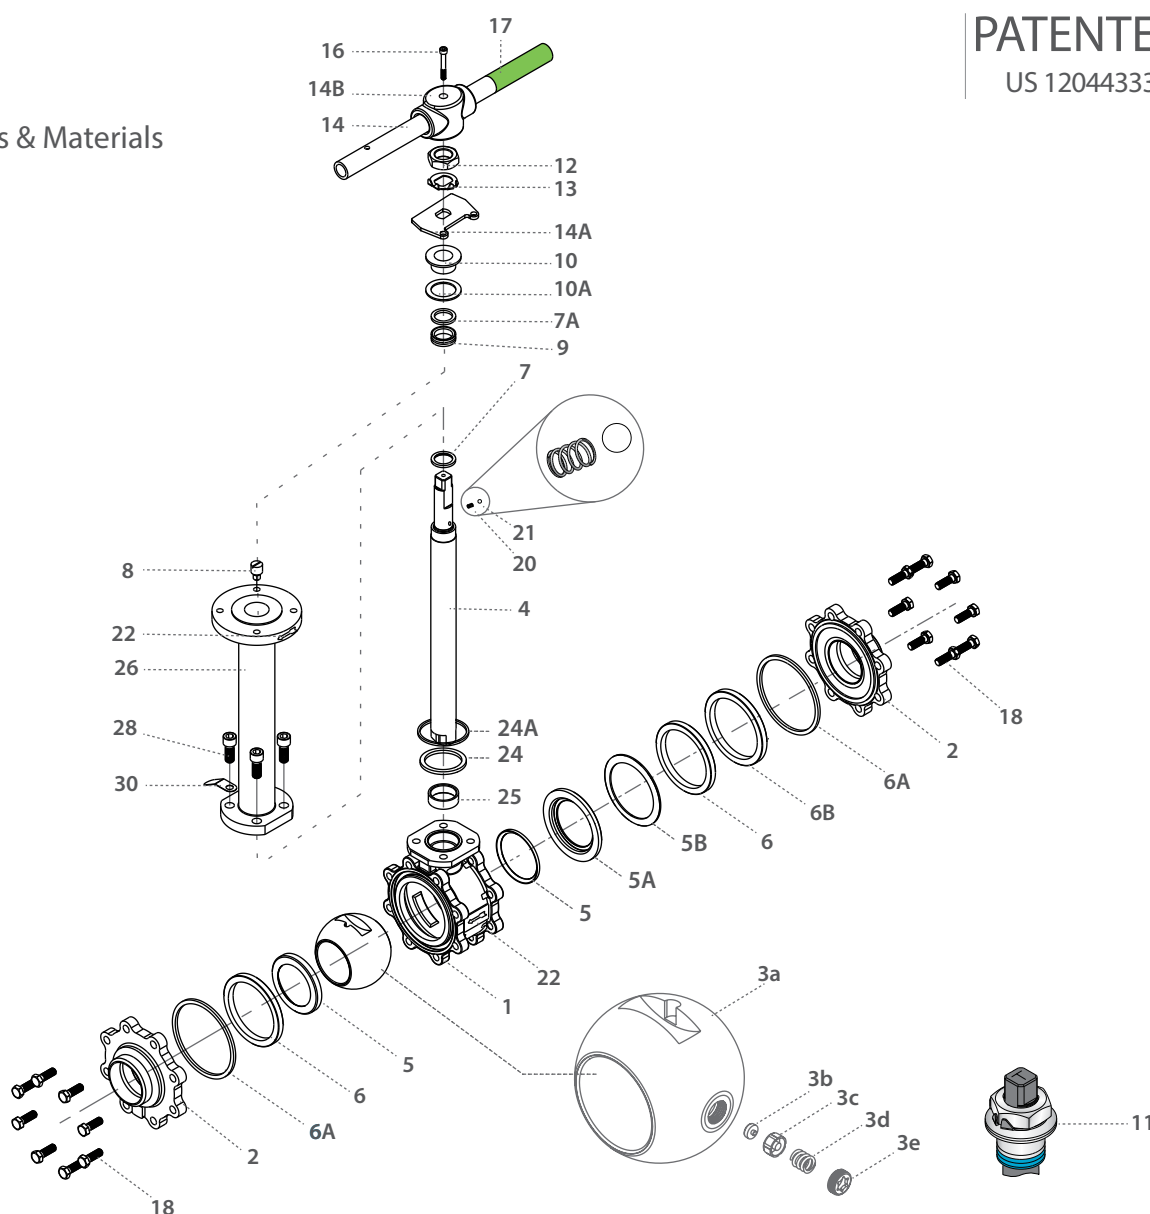

Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	End	Acc. Ordering Code	2
3a	Ball With Integrated PRV	S.Steel	1
3b	Insert	MOD PTFE, CF PTFE, PCTFE	1
3c	Piston	S.Steel	1
3d	Spring	INCONEL® X-750	1
3e	Nut	S.Steel	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	2
5A	Seat Housing	S. Steel	1
5B	Upstream Seat Spring	Inconel 718	1
6*	Inner Seal	TFM	2
6A*	Outer Seal	Acc. Ordering Code	2
6B	Support Ring	S. Steel	1
7*	Stem Thrust Seal	TFM, PCTFE	1
7A*	Anti-Abrasion Ring	TFM, PCTFE	1
8	Stop Pin	S. Steel	1
9*	Stem Seal	TFM, Graphite	1
10	Follower	S. Steel	1
10A*	Slide Bearing	S. Steel	1

Item	Description	Material specifications	Qty.
11	Disc Spring	S. Steel	2
12	Stem Nut	S. Steel	1
13	Tab Lock Washer	S. Steel	1
14	Handle	S. Steel	1
14A	Stop Plate	S. Steel	1
14B	Wrench Head	S. Steel	1
16	Wrench Bolt	S. Steel	1
17	Sleeve	PVC	1
18	Body Bolt	S. Steel	8
20	Anti-Static Spring	S. Steel	2
21	Anti-Static Plunger	S. Steel	2
22	Arrow Flow	S. Steel	2
23	Tag (Not Shown)	S. Steel	1
24*	Bonnet Inner Seal	TFM	1
24A*	Bonnet Outer Seal	Acc. Ordering Code	1
25*	Stem Bearing	PTFE	1
26	Bonnet	S. Steel	1
28	Bolt	S. Steel	4
30	Dog Tag	S. Steel	1

* Maintenance kit components



Cryogenic Floating Ball 3 Piece; BD - Bidirectional - Ordering Code System

"Mandatory option" options are marked with **green background** | "Standard offer" options are marked with **light green background**

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	.	.	30
1	5			F	C	4	7	W	-	6	6	6	M	A	A	G	/	B	W			-	B	D		
Size		Features			Series		Design	Body material		Ends material	Ball material	Stem material	Seat material	Inner Seal	Outer Seal	End connection			Special features							

Size (1-2)		
Code	inch	mm
02	¼"	8
03	⅜"	10
05	½"	15
07	¾"	20
10	1"	25
12	1¼"	32
15	1½"	40
20	2"	50
25	2½"	65
30	3"	80
40	4"	100
60	6"	150
Features (3-6)		
C	Cryogenic design	
F	Fire safe	
B	Full port	
N	Control service	

Series (7-8)	
47	3 Piece Floating
Design (9)	
W	Total HermetiX Integrity package
Body material (11)	
6	CF8M
7	Monel
W	Hastelloy-C22
End material (12)	
6	CF3M
7	Monel
Ball material (13)	
6	S. Steel
1	Bronze
7	Monel
Stem material (14)	
M	High Strength S. Steel
6	S. Steel
Z	Inconel
Seat material (15)	
A	TFM
C ¹	PCTFE
P	CF PTFE
Inner Seal Material (16)	
A	TFM
G	Expanded graphite
Outer Seal Material (17)	
G	Expanded graphite
A	TFM

¹ From 2½" full port and above

End connections (19-22)	
Welded	
BW10	Buttweld schd. 10
BW	Buttweld schd. 40
XBW10	Extended buttweld schd. 10
XBW	Extended buttweld schd. 40
BW5	Buttweld schd. 5
BW80	Buttweld schd. 80
BWO *	Buttweld tube OD
BWD	Buttweld DIN 11860
BW1.6	buttweld ISO 1127 1.6mm
BW12.0	buttweld ISO 1127 2.0mm
BW12.3	buttweld ISO 1127 2.3mm
SW	Socket weld
SWO *	Socket weld tube OD
XBW80	Extended buttweld 80
XSW	Extended socket weld
ETO *	Extended tube OD
ETI1.6	Extended buttweld ISO 1127 1.6mm
ETI2.0	Extended buttweld ISO 1127 2.0mm
ETI2.3	Extended buttweld ISO 1127 2.3mm
ETD	Extended buttweld DIN 11850
* Std. port only	
Threaded	
NPT	ASME B1.20.1 - National Pipe Taper thread
MNPT	Male NPT
BSPT	EN 10226 - Pipe Taper thread
MBSPT	Male BSPT
BSPP	ISO228-1, DIN3852 - Pipe parallel thread
DIN3852	DIN3852 - Pipe Parallel thread
AS5202	SAE internal straight thread
Flanged	
150	ASME B16.5 #150 RF
300	ASME B16.5 #300 RF
600	ASME B16.5 #600 RF
900	ASME B16.5 #900 RF
PN16	EN1092 PN16 RF
PN40	EN1092 PN40 RF
PN63	EN1092 PN63 RF
PN100	EN1092 PN100 RF
PN160	EN1092 PN160 RF
Clamp	
GR**	Grayloc® compatible hub (Grayloc® is a registered trademark of Grayloc Products, L.L.C.)
TC *	Tri-Clamp
LL *	Compression fitting (Imperial) - No nuts & Ferrules
LM *	Compression fitting (metric) - No nuts & Ferrules
LL-NF *	Compression fitting (Imperial) - with nuts & Ferrules
LM-NF *	Compression fitting (metric) - with nuts & Ferrules

* Std. port only

** Not available for 1¼" (DN32) Valves


Special Features (24-30)	
BD	Bi-Directional Design
6.0	Short bonnet
B	Body made from rolled bar
BSQ	Body made from square bar
RJT	Ring Type Joint
EP	Electropolished
Vxx	V port, xx=angle
G...	Internal surface finish (G24, G32)
VBxx	Characterized control ball, xx=angle
FF	Flat face
TPED	TPED / TPE

Face To Face Sizes


Valve Size	Unit	B		A-XBW / ETI / ETD / GR		A-ETO	A-Flanged CLASS 150 FTF CLASS 300		A-Flanged CLASS 300 FTF CLASS 300		A-Flanged CLASS 600 FTF CLASS 600		A-Flanged DIN PN16-PN100		A-TC
		Std. port	Full port	Std. port	Full port	Std. port	Std. port	Full port	Std. port	Full port	Std. port	Full port	Std. port	Full port	Full port
DN10	mm	20.6	20.6	140.6	143.0	108.6									
3/8"	inch	0.8	0.8	5.5	5.6	4.3									
DN15	mm	20.6	24.6	140.6	147.0	137.0	140.0	140.0	140.0	140.0	165.0	140.0*	130.0	130.0	88.8
1/2"	inch	0.8	1.0	5.5	5.8	5.4	5.5	5.5	5.5	5.5	6.5	5.5*	5.1	5.1	3.5
DN20	mm	24.6	31.7	147	168.7	147.0	152.0	152	152.0	152	152.0*	152.0*	150.0	150.0	101.6
3/4"	inch	1.0	1.2	5.8	6.6	5.8	6.0	6.0	6.0	6.0	6.0*	6.0*	5.9	5.9	4.0
DN25	mm	31.7	41.3	168.7	179.3	164.1	165.1	165.1	165.1	165.1	216.0	165.1*	160.0	160.0	114.3
1"	inch	1.2	1.6	6.6	7.1	6.5	6.5	6.5	6.5	6.5	8.5	6.5*	6.3	6.3	4.5
DN32	mm	41.3	48.4	179.3	189.4	179.3	178.1	178.1	178.1	178.1	178.1*	178.1*	180.0	180.0	
1 1/4"	inch	1.6	1.9	7.1	7.5	7.1	7.0	7.0	7.0	7.0	7.0*	7.0*	7.1	7.1	
DN40	mm	48.4	56.3	189.4	200.3	184.0	190.0	190.0	190.0	190.0	241.0	190.0*	200.0	200.0	139.8
1 1/2"	inch	1.9	2.2	7.5	7.9	7.2	7.5	7.5	7.5	7.5	9.5	7.5*	7.9	7.9	5.5
DN50	mm	56.3	72.6	200.3	232.6	193.5	216.1	216.1	216.1	216.1	292.0	216.1*	230.0	230.0	158.9
2"	inch	2.2	2.9	7.9	9.2	7.6	8.5	8.5	8.5	8.5	11.5	8.5*	9.0	9.0	6.3
DN65	mm	72.6	83.4	232.6	283.4	222.6	241.0	241.0	241.0	241.0	241.0*	330.0	230.0	270.0	213.0
2 1/2"	inch	2.9	3.3	9.2	11.2	8.8	9.5	9.5	9.5	9.5	9.5*	13.0	9.1	10.6	8.4
DN80	mm	83.4	108.8	283.4	348.8	250.4	282.0	282.0	282.0	282.0	356.0	356.0	280.0	310.0	215.8
3"	inch	3.3	4.3	11.2	13.7	9.9	11.1	11.1	11.1	11.1	14.0	14.0	11.0	12.2	8.5
DN100	mm	108.8	123	348.8	390.0	348.8	305.0	305	305.0	305	432.0	432.0	350.0	350.0	245.4
4"	inch	4.3	4.8	13.7	15.4	13.7	12.0	12.0	12.0	12.0	17.0	17.0	13.78	13.78	9.7
DN150	mm	146.1	180	444.1	420.0	444.1	403.1	403.1	403.1	403.1	559.0	559.0	350.0	480.0	146.1
6"	inch	5.8	7.1	17.5	16.5	17.5	15.9	15.9	15.9	15.9	22.0	22.0	13.78	18.9	5.8

* Comply with class 300 FTF





XBW / ETO / ETI / ETD / GR

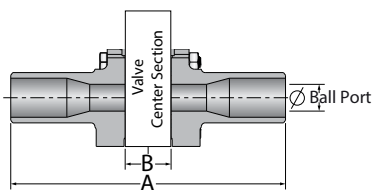

Flanged

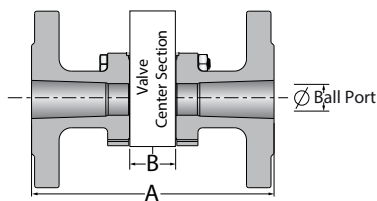


TC

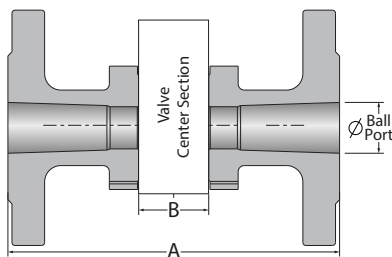



Cryogenic Floating Ball 3 Piece

Valve Dimensions

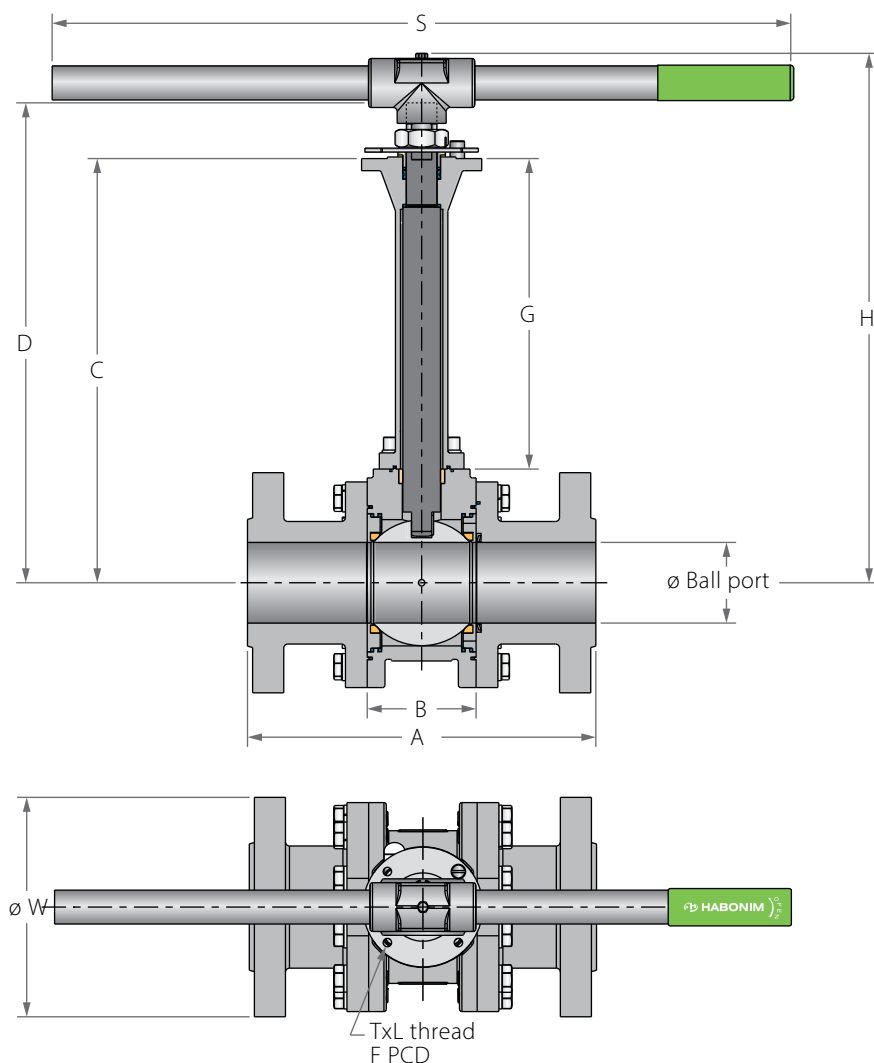

Preparation for actuation




Full Port	Unit	Ball port	A		B	Standard design				6" bonnet				S	W	M	MDD	N	P	F		TxL	Weight Kg/lb (Welded)			Kv
			Welded	#600		C	D	H	G	C	D	H	G										Std.	6"	C	
DN50	mm	51.05	200.0	292.0	75.0	432.5	479.1	431.0	345.0	239.9	286.5	238.4	152.4	401.0	165.0	18.9	15.9	1" - 14	16.7	F10	102.0	M10X15	25	22	421	
2"	inch	2.01	7.87	11.5	2.95	17.03	18.86	16.97	13.58	9.44	11.28	9.39	6.0	15.79	6.5	0.74	0.63	UNS-2A	0.66		4.02		55	48	492	
DN80	mm	80.0	356.0	356.0	110.0	511.5	580.6	632.0	385.0	278.9	348.0	399.4	152.4	916.0	210.0	28.45	23.75	1½"	26.2	F12	125.0	M12X15	50	45	983	
3"	inch	3.15	14.02	14.02	4.33	20.14	22.86	24.88	15.16	10.98	13.7	15.72	6.0	36.06	8.27	1.12	0.94	UNF-2A	1.03		4.92		110	99	1150	
DN100	mm	100.0	400.0	432.0	135.0	527.3	596.4	646.5	385.0	294.7	363.8	413.9	152.4	916.0	275.0	28.45	23.75	1½"	26.2	F12	125.0	M12X15	75	70	1807	
4"	inch	3.94	15.75	17.01	5.31	20.76	23.48	25.45	15.16	11.6	14.32	16.3	6.0	36.06	10.83	1.12	0.94	UNF-2A	1.03		4.92		165	154	2114	
DN150	mm	150.0	490.0	559.0	190.0	579.0	691.65	-	385.0	346.4	459.05	-	152.4	-	355.0	35.92	35.92	2"	40.0	F14	140.0	M16X20	155	140	4310	
6"	inch	5.91	19.29	22.01	7.48	22.8	27.23	-	15.16	13.64	18.07	-	6.0	-	13.98	1.41	1.41	UN-2A	1.57		5.51		341	308	5043	
DN200	mm	200.0	500.0	660.0	275.0	630.0	785.0	-	385.0	397.4	510.05	-	152.4	-	420.0	45.9	45.9	2¾"	50.0	F16	165.0	M20X30	400	380	7970	
8"	inch	7.87	19.69	25.98	10.83	24.8	30.9	-	15.16	15.65	20.08	-	6.0	-	16.54	1.81	1.81	UN-2A	1.97		6.5		880	836	9325	



Cryogenic Floating Ball 3 Piece

Components & Materials

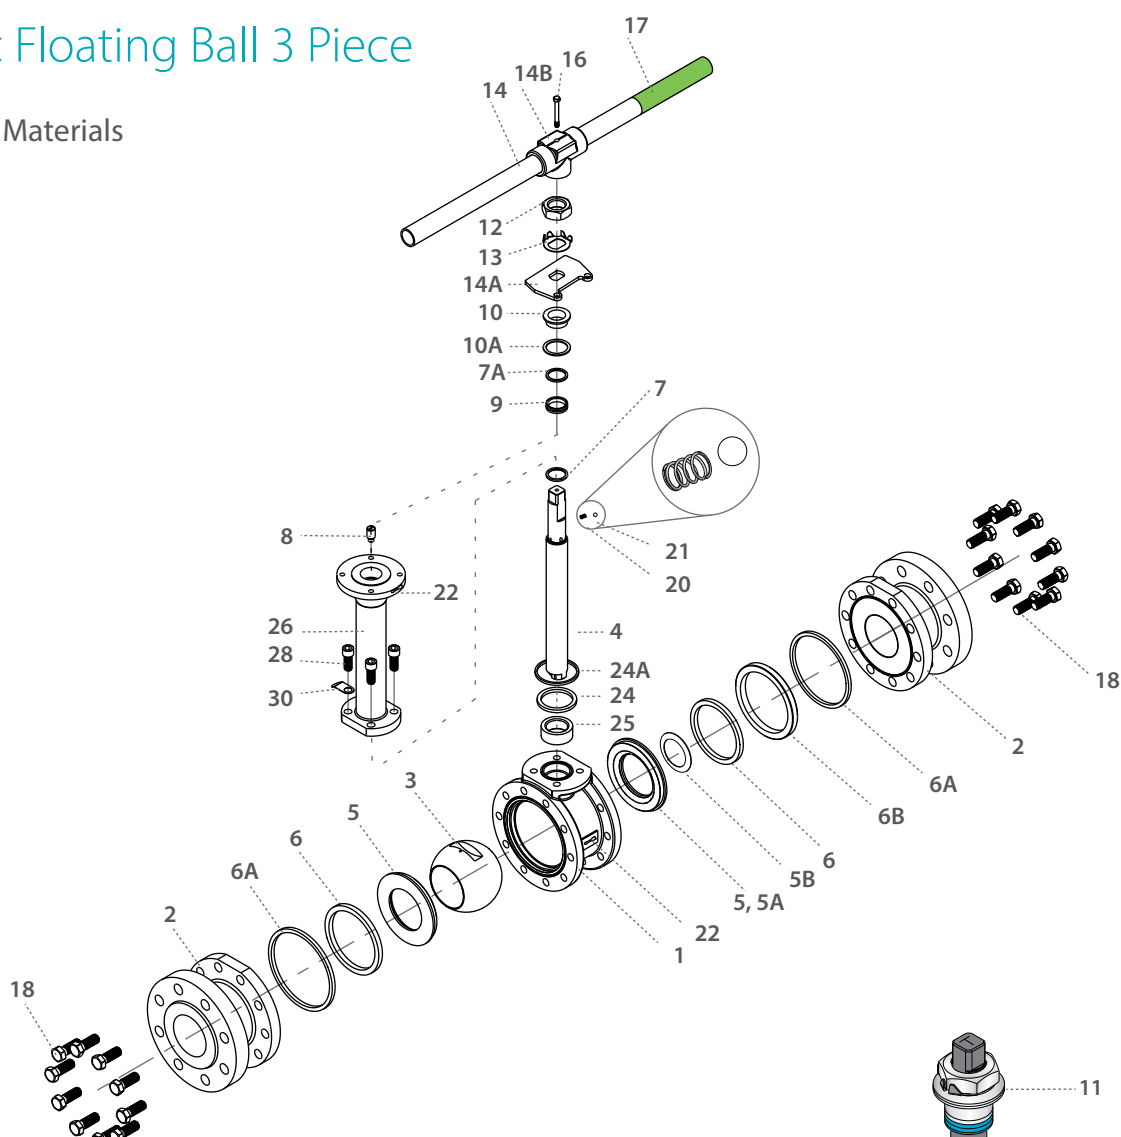

Item	Description	Material specifications	Qty.
1	Ball With Integrated PRV	Acc. Ordering Code	1
2	End	Acc. Ordering Code	2
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	2
5A	Seat Housing	S. Steel	2
5B	Upstream Seat Spring	Inconel 718	1
6*	Inner Seal	TFM	2
6A*	Outer Seal	Acc. Ordering Code	2
6B	Support Ring	S. Steel	1
7*	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
8	Stop Pin	S. Steel	1
9*	Stem Seal	TFM	1
10	Follower	S. Steel	1
10A*	Slide Bearing	S. Steel	1
11	Disc Spring	S. Steel	2
12	Stem Nut	S. Steel	1
13	Tab Lock Washer	S. Steel	1

Item	Description	Material specifications	Qty.
14**	Handle	S. Steel	1
14A	Stop Plate	S. Steel	1
14B	Wrench Head	S. Steel	1
16	Wrench Bolt	S. Steel	1
17	Sleeve	PVC	1
18	Body Bolt	S. Steel	20-32
20	Anti-Static Spring	S. Steel	2
21	Anti-Static Plunger	S. Steel	2
22	Arrow Flow	S. Steel	2
23	Tag (not shown)	S. Steel	1
24*	Bonnet Inner Seal	TFM	1
24A*	Bonnet Outer Seal	Acc. Ordering Code	1
25*	Stem Bearing	PTFE	1
26	Bonnet	S. Steel	1
28	Bolt	S. Steel	4
30	Dog Tag	S. Steel	1


* Maintenance kit components

** Gear operator should be used for size 6" DN150 and above (handle components are not included)



Cryogenic Floating Ball 3 Piece ; BD - Bidirectional

PATENTED
US 12044333

Valve Dimensions

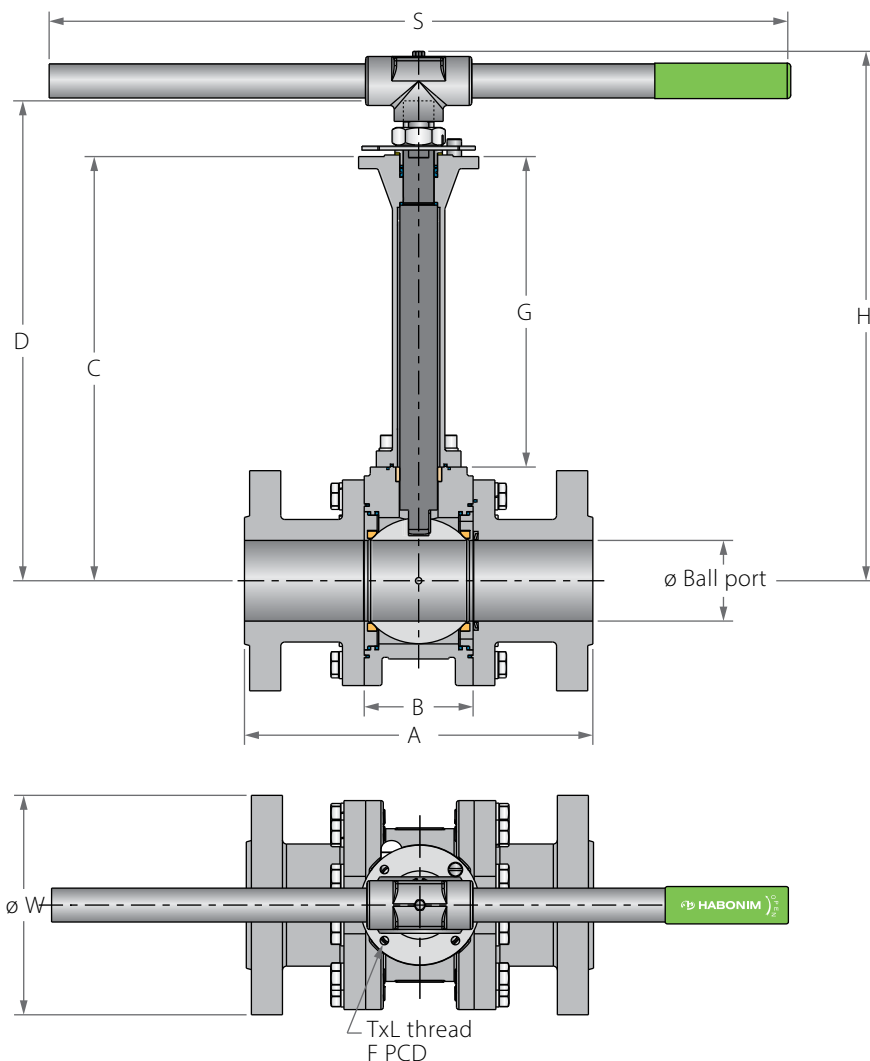

Preparation for actuation




Full Port	Unit	Ball port	A		B	Standard design				6" bonnet				S	W	M	MDD	N	P	F		TxL	Weight Kg/lb (Welded)			Kv
			Welded	#600		C	D	H	G	C	D	H	G										Std.	6"	C	
DN50	mm	51.05	200.0	292.0	75.0	432.5	479.1	431.0	345.0	239.9	286.5	238.4	152.4	401.0	165.0	18.9	15.9	1" - 14 UNS-2A	16.7	F10	102.0	M10X15	25	22	421	
2"	inch	2.01	7.87	11.5	2.95	17.03	18.86	16.97	13.58	9.44	11.28	9.39	6.0	15.79	6.5	0.74	0.63		0.66		4.02		55	48	492	
DN80	mm	80.0	356.0	356.0	110.0	511.5	580.6	632.0	385.0	278.9	348.0	399.4	152.4	916.0	210.0	28.45	23.75	1½" UNF-2A	26.2	F12	125.0	M12X15	50	45	983	
3"	inch	3.15	14.02	14.02	4.33	20.14	22.86	24.88	15.16	10.98	13.7	15.72	6.0	36.06	8.27	1.12	0.94		1.03		4.92		110	99	1150	
DN100	mm	100.0	400.0	432.0	135.0	527.3	596.4	646.5	385.0	294.7	363.8	413.9	152.4	916.0	275.0	28.45	23.75	1½" UNF-2A	26.2	F12	125.0	M12X15	75	70	1807	
4"	inch	3.94	15.75	17.01	5.31	20.76	23.48	25.45	15.16	11.6	14.32	16.3	6.0	36.06	10.83	1.12	0.94		1.03		4.92		165	154	2114	
DN150	mm	150.0	490.0	559.0	190.0	579.0	691.65	-	385.0	346.4	459.05	-	152.4	-	355.0	35.92	35.92	2" UN-2A	40.0	F14	140.0	M16X20	155	140	4310	
6"	inch	5.91	19.29	22.01	7.48	22.8	27.23	-	15.16	13.64	18.07	-	6.0	-	13.98	1.41	1.41		1.57		5.51		341	308	5043	
DN200	mm	200.0	500.0	660.0	275.0	630.0	785.0	-	385.0	397.4	510.05	-	152.4	-	420.0	45.9	45.9	2¾" UN-2A	50.0	F16	165.0	M20X30	400	380	7970	
8"	inch	7.87	19.69	25.98	10.83	24.8	30.9	-	15.16	15.65	20.08	-	6.0	-	16.54	1.81	1.81		1.97		6.5		880	836	9325	



Cryogenic Floating Ball 3 Piece

Components & Materials

PATENTED
US 12044333

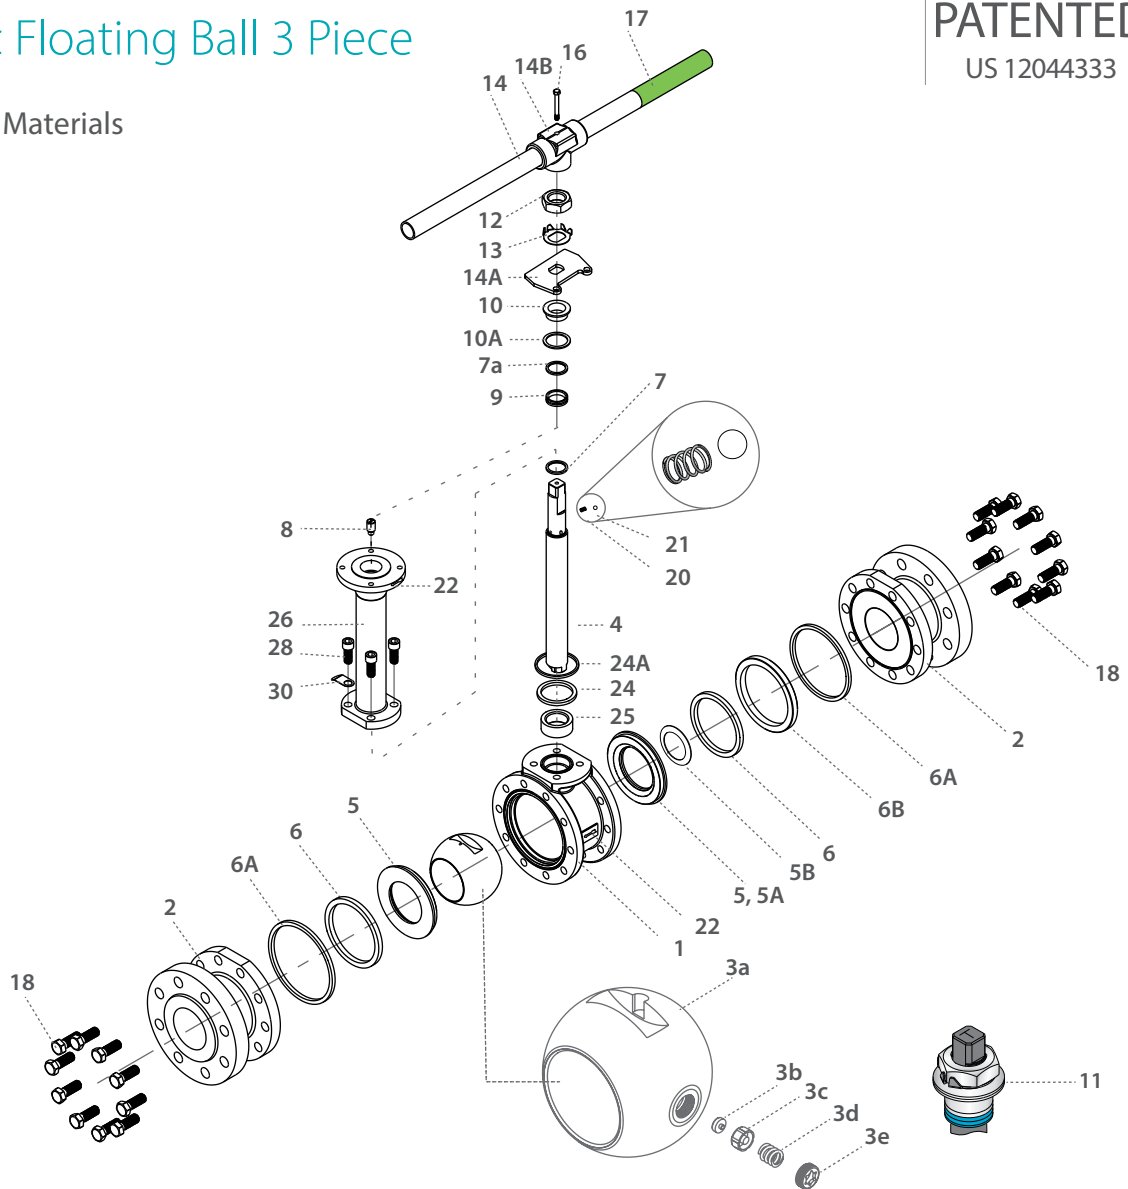

Item	Description	Material specifications	Qty.
1	Ball With Integrated PRV	Acc. Ordering Code	1
2	End	Acc. Ordering Code	2
3a	Ball With Integrated PRV	S.Steel	1
3b	Insert	MOD PTFE, CF PTFE, PCTFE	1
3c	Piston	S.Steel	1
3d	Spring	INCONEL® X-750	1
3e	Nut	S.Steel	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	2
5A	Seat Housing	S. Steel	2
5B	Upstream Seat Spring	Inconel 718	1
6*	Inner Seal	TFM	2
6A*	Outer Seal	Acc. Ordering Code	2
6B	Support Ring	S. Steel	1
7*	Stem Thrust Seal	PCTFE	1
7a*	Anti-Abrasion Ring	PCTFE	1
8	Stop Pin	S. Steel	1
9*	Stem Seal	TFM	1
10	Follower	S. Steel	1
10A*	Slide Bearing	S. Steel	1
11	Disc Spring	S. Steel	2

Item	Description	Material specifications	Qty.
12	Stem Nut	S. Steel	1
13	Tab Lock Washer	S. Steel	1
14**	Handle	S. Steel	1
14A	Stop Plate	S. Steel	1
14B	Wrench Head	S. Steel	1
16	Wrench Bolt	S. Steel	1
17	Sleeve	PVC	1
18	Body Bolt	S. Steel	20-32
20	Anti-Static Spring	S. Steel	2
21	Anti-Static Plunger	S. Steel	2
22	Arrow Flow	S. Steel	2
23	Tag (not shown)	S. Steel	1
24*	Bonnet Inner Seal	TFM	1
24A*	Bonnet Outer Seal	Acc. Ordering Code	1
25*	Stem Bearing	PTFE	1
26	Bonnet	S. Steel	1
28	Bolt	S. Steel	4
30	Dog Tag	S. Steel	1

* Maintenance kit components

** Gear operator should be used for size 6" DN150 and above (handle components are not included)



Cryogenic Floating Ball 3 Piece - Ordering Code System

"Mandatory option" options are marked with **green background** | "Standard offer" options are marked with **light green background**

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	.	.	30
4	0			F	C	2	6		-	6	6	6	M	A	A	G	/	B	W			-				
Size		Features			Series		Design	Body material		Ends material	Ball material	Stem material	Seat material	Inner Seal	Outer Seal	End connection			Special features							

Size (1-2)		
Code	inch	mm
20	2"	50
30	3"	80
40	4"	100
60	6"	150
80	8"	200
Features (3-6)		
C	Cryogenic design	
F	Fire safe	
N	Control	

Series (7-8)	
26	3 Piece Floating
Body material (11)	
6	S. Steel
End material (12)	
6	S. Steel
Ball material (13)	
6	S. Steel 316L
7	Monel
Stem material (14)	
M	High Strength S. Steel
Z	Inconel

Seat material (15)	
A	TFM
F	Hybrid Seat (info in special features)
Inner Seal Material (16)	
A	TFM
G	Expanded graphite
Outer Seal Material (17)	
G	Expanded graphite
A	TFM

End connections (19-22)	
Welded	
XBW	Extended butt weld schd. 40
XBW80	Extended butt weld 80
BW *	Butt weld schd. 40
BW10	Butt weld schd. 10
BW80	Butt weld schd. 80
SW	Socket weld
XBW10	Extended butt weld schd. 10
XSW	Extended socket weld

* Up to 4" only

Flanged	
600	ASME B16.5 #600 RF
PN63	EN1092 PN63 RF
PN100	EN1092 PN100 RF
Flanged RTJ	
600RTJ	ASME B16.5 #600 RTJ
Clamp	
GR**	Grayloc® compatible hub (Grayloc® is a registered trademark of Grayloc Products, L.L.C.)

Hybrid Seats (24-27)


24	25-26	27
Insert material	Seat Configuration	Seal Type
A TFM	00 Unidirectional Spring-Loaded Hybrid Seats	5 Seal 1: TFM; Seal 2: Expanded graphite
P CF PTFE		6 Seal 1: TFM
C PCTFE		

Special Features (24-30)	
BD	Bi-directional design
6.0	Short bonnet
Vxx	V port
VBxx	Characterized control ball

** Not available for 1½" (DN32) Valves


FLOATING BALL

HIGH PRESSURE
3 PIECE

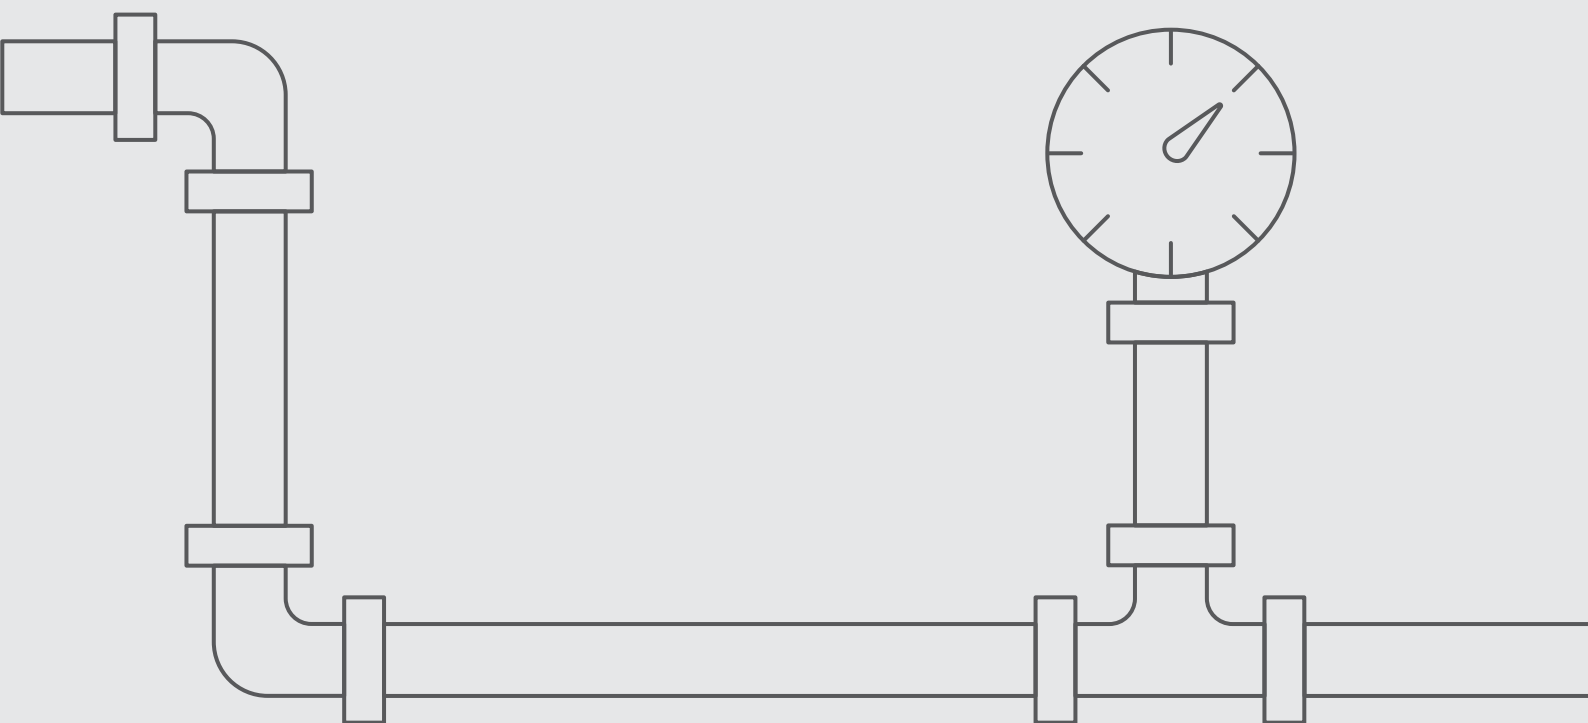


Cryogenic High Pressure Floating Ball 3 Piece

Valve Dimensions

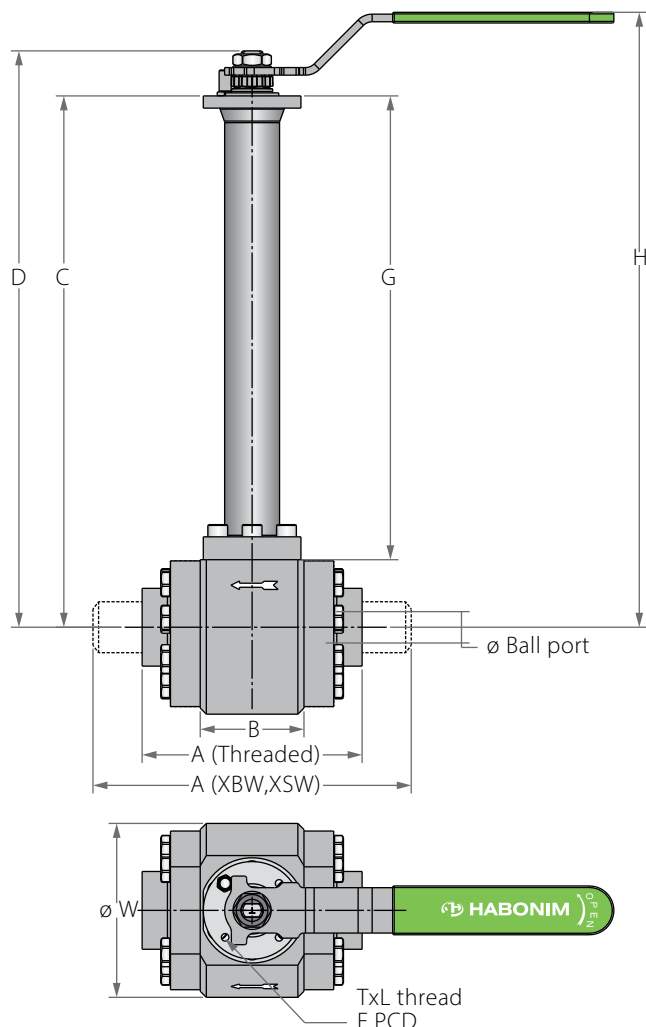

Preparation for actuation

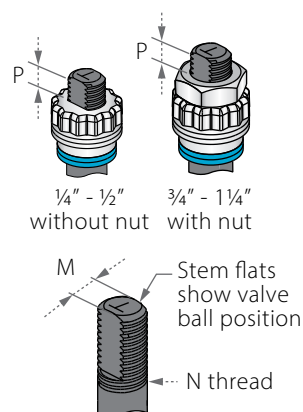


Std. port	Full port	Unit	Ball port	A THD	A XBW/XSW	B	Standard design				6" bonnet				S	W	M	N	P	F	TxL	Std. bonnet	6" bonnet	Kv	
							C	D	G	H	C	D	G	H								Weight kg/lb	Cv		
DN15	DN8, DN10	mm	11.15	107.2	173.6	50.0	333.0	341.9	304.0	364.4	181.4	190.3	152.4	212.8	150.0	78.0	5.5	3/8"	6.5	F03	36.0	M5X6	4.0	3.4	7
1/2"	1/4", 3/8"	inch	0.44	4.22	6.83	1.97	13.11	13.46	11.97	14.35	7.14	7.49	6.0	8.38	5.91	3.07	0.22	UNF	0.26		1.42			8.76	7.41
DN20	DN15	mm	13.0	120	188.6	60.0	338.6	356.1	304.0	381.1	187.0	204.5	152.4	229.5	187.0	98.0	7.5	7/16"	6.5	F04	42.0	M5X8	6.6	5.8	10
3/4"	1/2"	inch	0.51	4.72	7.43	2.36	13.33	14.02	11.97	15.0	7.36	8.05	6.0	9.04	7.36	3.86	0.30	UNF	0.26		1.65			14.50	12.69
DN25	DN20	mm	20.65	144.2	208.6	68	348.25	377.75	304.0	402.75	196.65	226.15	152.4	251.15	237.0	114.0	8.7	9/16"	6.5	F05	50.0	M6X8	10.5	9.4	28
1"	3/4"	inch	0.81	5.68	8.21	2.68	13.71	14.87	11.97	15.86	7.74	8.90	6.0	9.89	9.33	4.49	0.34	UNF	0.26		1.97			23.08	20.59
DN32	DN25	mm	25.5	152.0	211.6	68.0	355.5	385.0	304.0	410.0	203.9	233.4	152.4	258.4	237.0	124.0	8.7	9/16"	6.5	F05	50.0	M6X9	12.5	11.4	49
1 1/4"	1"	inch	1.0	5.98	8.33	2.68	14.00	15.16	11.97	16.14	8.03	9.19	6.0	10.17	9.33	4.88	0.34	UNF	0.26		1.97			27.57	25.06



Cryogenic High Pressure Floating Ball 3 Piece

Components & Materials

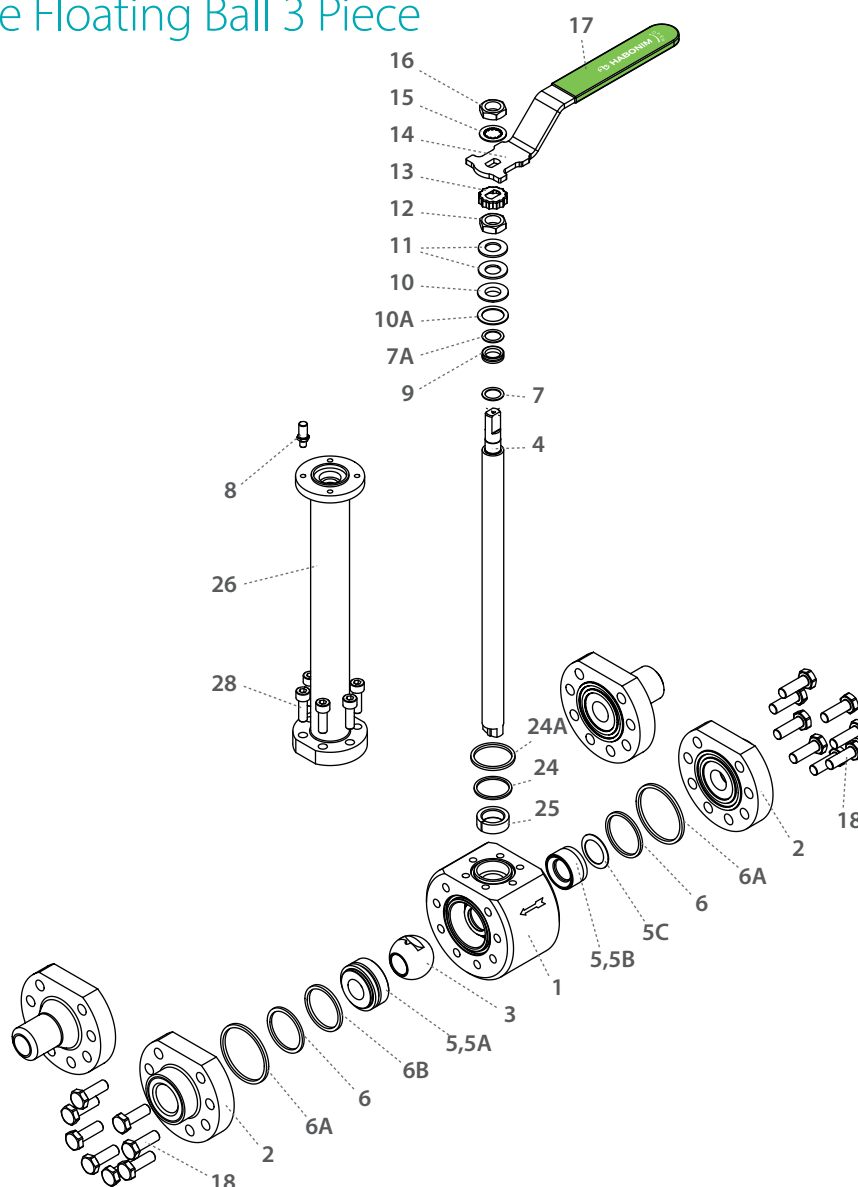


Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	Ends	Acc. Ordering Code	2
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	2
5A*	Downstream Seat Housing	S. Steel	1
5B	Upstream Seat Housing	S. Steel	1
5C	Upstream Seat Spring	Inconel 718	1
6*	Inner Seal	TFM	2
6A*	Outer Seal	Acc. Ordering Code	2
6B*	Graphite String	Graphite	1
7*	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
8	Stop Pin	S. Steel	1
9*	Stem Seal	TFM	1

Item	Description	Material specifications	Qty.
10	Follower	S. Steel	1
10A*	Slide Bearing	S. Steel	1
11	Disc Spring	S. Steel	2
12	Stem Nut	S. Steel	2
13	Locking Clip	S. Steel	1
14	Handle	S. Steel	1
15	Serrated Washer	S. Steel	1
16	Handle Nut	S. Steel	1
17	Sleeve	PVC	1
18	Body Bolts	S. Steel	12-16
24*	Bonnet Inner Seal	TFM	1
24A*	Bonnet Outer Seal	Acc. Ordering Code	1
25*	Stem Bearing	PTFE	1
26	Bonnet	S. Steel 316	1
28	Bonnet Bolts	S. Steel	6


* Maintenance kit components

Cryogenic High Pressure Floating Ball 3 Piece

Valve Dimensions

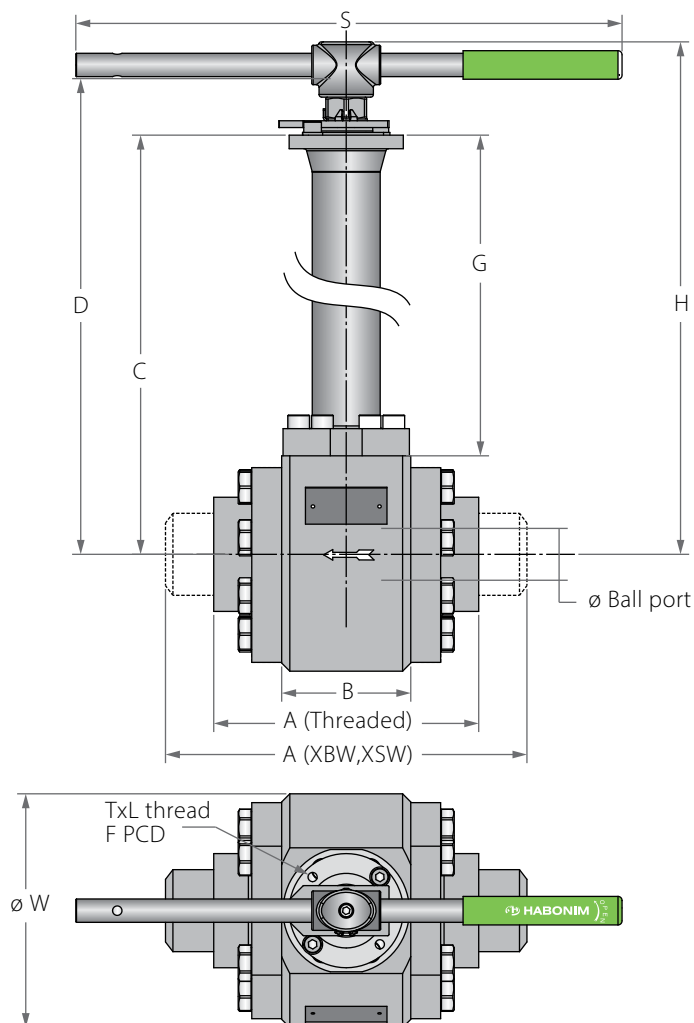


Preparation for actuation

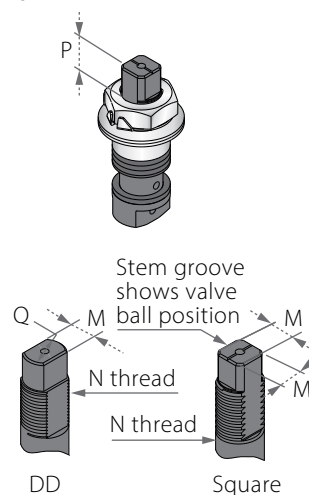

Std. port	Full port	Unit	Ball port	A THD	A XBW/XSW	B	Standard design				6" bonnet				S	W	M	N	P	F			TxL	Std. bonnet	6" bonnet	Kv
							C	D	G	H	C	D	G	H										Weight kg/lb	Cv	
DN40	DN32	mm	31.8	179.0	262.0	95.0	357.0	398.6	304.0	425.6	205.4	247.0	152.4	274.0	400.0	140.0	13.9	M20x2.5	13.5	F07	70.0	M8X12	21.2	19.1	69	
1½"	1¼"	inch	1.25	7.05	10.31	3.74	14.06	15.69	11.97	16.76	8.09	9.72	6.0	10.79	15.75	5.51	0.55		0.53		2.76		46.64	42.11	80	
DN50	DN40	mm	38.1	195.0	266.0	95.0	376.5	418.1	304.0	445.1	224.9	266.5	152.4	293.5	400.0	172.0	13.9	M20x2.5	14.6	F07	70.0	M8X12	28.7	26.6	102	
2"	1½"	inch	1.50	7.68	10.47	3.74	14.82	16.46	11.97	17.52	8.85	10.49	6.0	11.56	15.75	6.77	0.55		0.57		2.76		63.14	58.61	118	
DN65	DN50	mm	50.8	225.0	313.4	105.0	392.3	438.8	304.8	479.2	239.9	286.4	152.4	326.8	610.0	199.0	18.9	1"-14	16.7	F10	102.0	M10X16	36.9	44.1	208	
2½"	2"	inch	2.0	8.86	12.34	4.13	15.44	17.28	12.0	18.87	9.44	11.28	6.0	12.87	24.02	7.83	0.74	UNS-2A	0.66		4.02		81.18	96.98	241	
DN80	DN65	mm	63.5	301.6	403	140	417.0	486.5	300.0	546.5	269.4	338.9	152.4	398.9	916	268.0	28.45	1½"-12	26.2	F12	125.0	M12X15	99.4	94.7	301	
3"	2½"	inch	2.50	11.87	15.87	5.51	16.42	19.15	11.81	21.52	10.61	13.34	6.0	15.70	36.06	10.55	1.12	UNF-2A	1.03		4.92		218.77	208.43	348	
DN100	DN80	mm	82.7	-	420.0	140.0	434.0	503.5	300.0	563.5	286.4	355.9	152.4	415.9	916.0	298.0	28.45	1½"-12	26.2	F12	125	M12X15	133.3	128.3	616	
4"	3"	inch	3.26	-	16.54	5.51	17.09	19.82	11.81	22.19	11.28	14.01	6.0	16.37	36.06	11.73	1.12	UNF-2A	1.03		4.92		293.17	282.30	713	
DN150	DN100	mm	100.0	-	510.0	175.0	484.8	597.4	304.8	-	383.2	495.8	203.2	-	-	399.0	35.9	2"-8	40.0	F14	140.0	M16X20	281.8	276.3	746	
6"	4"	inch	3.94	-	20.08	6.89	19.09	23.52	12.0	-	15.09	19.52	8.0	-	-	15.71	1.41	UN-2A	1.57		5.51		619.94	607.93	863	



Components & Materials

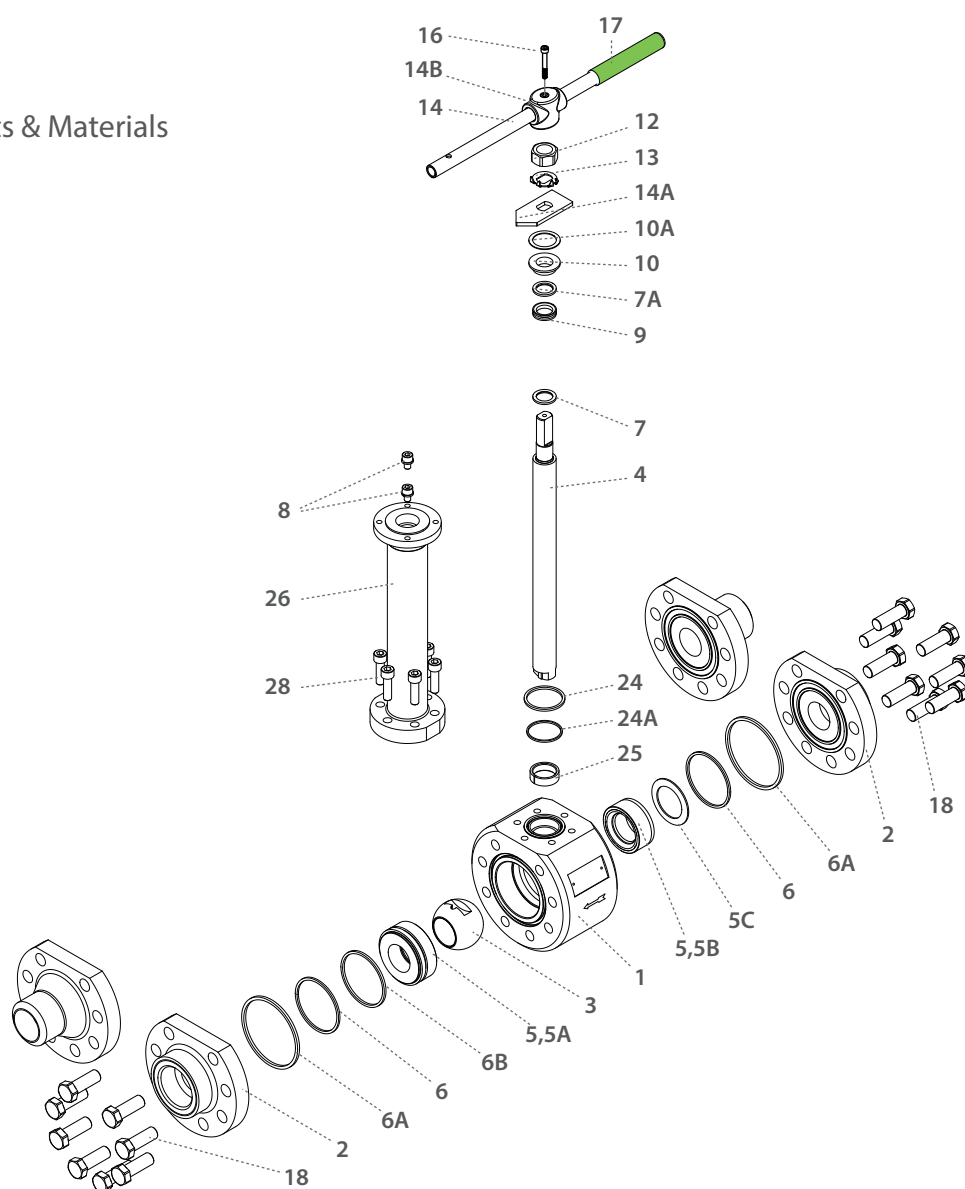

Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	End	Acc. Ordering Code	2
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	2
5A*	Seat Housing	S. Steel	2
5B ⁽¹⁾	Upstream Seat Spring	Inconel 718	1
6*	Inner Seal	Graphite, TFM	2
6A*	Outer Seal	Acc. Ordering Code	2
6B*	Graphite String	Graphite	1
7*	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
8	Stop Pin	S. Steel	1
9*	Stem Seal	TFM	1
10	Follower	S. Steel	1
10A*	Slide Bearing	S. Steel	1
11	Disc Spring	S. Steel	2
12	Stem Nut	S. Steel	1
13	Tab Lock Washer	S. Steel	1
14**	Handle	S. Steel	1

Item	Description	Material specifications	Qty.
14A	Stop Plate	S. Steel	1
14B	Wrench Head	S. Steel	1
16	Wrench Bolt	S. Steel	1
17	Sleeve	PVC	1
18	Body Bolt	S. Steel	8-16
18A	Spring Washer	S. Steel	8-16
19	Body Bolt	S. Steel	8-16
20	Anti-Static Spring	S. Steel	2
21	Anti-Static Plunger	S. Steel	2
22	Arrow Flow	S. Steel	2
23	Tag (not shown)	S. Steel	1
24*	Bonnet Inner Seal	Graphite, TFM	1
24A*	Bonnet Outer Seal	Acc. Ordering Code	1
25*	Stem Bearing	PTFE	1
26	Bonnet	S. Steel	1
28	Bolt	S. Steel	6-8
30	Dog Tag	S. Steel	1

* Maintenance kit components

** Gear operator should be used for size 3" DN80 (handle components are not included)

Face To Face Sizes

Valve Size	B		A-XBW, XSW, GR		A-Flange #900		A-Flange #900 RTJ		A-Flange #1500		A-Flange #1500RTJ		A-Flange #2500		A-Flange #2500RTJ		PN250-PN400 F3	
	Std. port	Full port	Std. port	Full port	Std. port	Full port	Std. port	Full port	Std. port	Full port	Std. port	Full port	Std. port	Full port	Std. port	Full port	Std. port	Full port
DN8	50.0	-	173.6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1/4"	1.97	-	6.83	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
DN10	50.0	-	173.6	-	-	-	-	-	-	-	-	-	-	-	-	-	230.0	-
3/8"	1.97	-	6.83	-	-	-	-	-	-	-	-	-	-	-	-	-	9.06	-
DN15	50.0	60.0	173.6	188.6	216.0	216.0	216.0	216.0	216.0	216.0	216.0	216.0	264.0	264.0	264.0	264.0	230.0	230.0
1/2"	1.97	2.36	6.83	7.43	8.50	8.50	8.50	8.50	8.50	8.50	8.50	8.50	10.39	10.39	10.39	10.39	9.06	9.06
DN20	60.0	68.0	188.6	208.6	229.0	229.0	229.0	229.0	229.0	229.0	229.0	229.0	273.0	273.0	273.0	273.0	260.0	260.0
3/4"	2.36	2.68	7.43	8.21	9.02	9.02	9.02	9.02	9.02	9.02	9.02	9.02	10.75	10.75	10.75	10.75	10.24	10.24
DN25	68.0	68.0	208.6	211.6	254.0	254.0	254.0	254.0	254.0	254.0	254.0	254.0	308.0	308.0	308.0	308.0	260.0	260.0
1"	2.68	2.68	8.21	8.33	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	12.13	12.13	12.13	12.13	10.24	10.24
DN32	68.0	95.0	211.6	262.0	279.0	279.0	279.0	279.0	279.0	279.0	279.0	279.0	349.0	349.0	352.0	352.0	300.0	300.0
1 1/4"	2.68	3.74	8.33	10.31	10.98	10.98	10.98	10.98	10.98	10.98	10.98	10.98	13.74	13.74	13.86	13.86	11.81	11.81
DN40	95.0	95.0	262.0	266.0	305.0	305.0	305.0	305.0	305.0	305.0	305.0	305.0	384.0	384.0	387.0	387.0	300.0	300.0
1 1/2"	3.74	3.74	10.31	10.47	12.01	12.01	12.01	12.01	12.01	12.01	12.01	12.01	15.12	15.12	15.24	15.24	11.81	11.81
DN50	95.0	105.0	266.0	313.4	368.0	368.0	371.0	371.0	368.0	368.0	371.0	37.01	451.0	451.0	454.0	454.0	350.0	350.0
2"	3.74	4.13	10.47	12.34	14.49	14.49	14.61	14.61	14.49	14.49	14.61	14.61	17.76	17.76	17.87	17.87	13.78	13.78
DN65	105.0	140.0	313.4	403.0	419.0	419.0	422.0	422.0	419.0	419.0	422.0	422.0	508.0	508.0	514.0	514.0	400.0	400.0
2 1/2"	4.13	5.51	12.34	15.87	16.50	16.50	16.61	16.61	16.50	16.50	16.61	16.61	20.0	20.0	20.24	20.24	15.75	15.75
DN80	140.0	150.0	403.0	430.0	381.0	381.0	384.0	384.0	470.0	470.0	473.0	473.0	578.0	578.0	584.0	584.0	450.0	450.0
3"	5.51	5.91	15.87	16.93	15.0	15.0	15.12	15.12	18.50	18.50	18.62	18.62	22.76	22.76	22.99	22.99	17.72	17.72
DN100	150.0	175.0	430.0	510.0	457.0	45.07	460.0	460.0	546.0	546.0	549.0	549.0	673.0	673.0	683.0	683.0	520.0	520.0
4"	5.91	6.89	16.93	20.08	17.99	17.99	18.11	18.11	21.50	21.50	21.61	21.61	26.50	26.50	26.89	26.89	20.47	20.47
DN150	175.0	-	510.0	-	610.0	-	457.0	-	705.0	-	711.0	-	914.0	-	927.0	-	700.0	-
6"	6.89	-	20.08	-	24.02	-	17.99	-	27.76	-	27.99	-	35.98	-	36.50	-	27.56	-



Cryogenic High Pressure Floating Ball 3 Piece - Ordering Code System

"Mandatory option" options are marked with **green background** | "Standard offer" options are marked with **light green background**

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	.	.	30
4	0			F	C	2	8	W	-	6	6	6	M	F	A	G	/	X	B	W	80	-	C	0	0	5
Size		Features				Series		Design		Body/End material		Ball/Stem material		Seat material	Inner Seal	Outer Seal	End connection				Special features					

Size (1-2)		
Code	inch	mm
02	¼"	8
03	⅜"	10
05	½"	15
07	¾"	20
10	1"	25
12	1¼"	32
15	1½"	40
20	2"	50
25	2½"	65
30	3"	80
40	4"	100
60	6"	150
Features (3-6)		
C	Cryogenic	
F	Fire safe	
B	Full port	
N	Control	

Series (7-8)	
28	HP Float 3 piece.
Design (9)	
W	Total HermetiX Integrity package
Body material (11)	
6	S. Steel 316/316L
End material (12)	
6	S. Steel 316/316L
Ball material (13) ¼"-¾"	
M	High Strength S. Steel
Ball material (13) 1" and up	
6	S. Steel 316/316L
M	High Strength S. Steel
Stem material (14)	
M	High Strength S. Steel

Seat material (15)	
F	Hybrid Seat (info in special features)
Inner Seal Material (16)	
A	TFM
G	Expanded graphite
Outer Seal Material (17)	
G	Expanded graphite
A	TFM

End connections (19-22)	
Welded	
XBW80	Extended butt weld schd. 80
XBW160*	Extended butt weld schd. 160
XBWXXS	Extended butt weld schd. XXS
XSW	Extended socket weld

* Std. port only


Threaded	
NPT	ASME B1.20.1 - National Pipe Taper thread
BSPT	EN 10226-2 - British Standard Pipe Taper thread
BSPP	ISO228-1, DIN3852 - Pipe parallel thread
DIN3852	DIN3852 EN 10226-1 - Pipe parallel thread
AS5202	SAE internal straight thread
Flanged	
600	ASME B16.5 #600 RF
900	ASME B16.5 #900 RF
1500	ASME B16.5 #1500 RF
2500	ASME B16.5 #2500 RF
PN100	EN1092 PN100 RF
PN160	EN1092 PN160 RF
PN250	EN 1092-1 PN250 RF
PN400	EN 1092-1 PN400 RF
Flanged RTJ	
600RTJ	ASME B16.5 #600 RTJ
900RTJ	ASME B16.5 #900 RTJ
1500RTJ	ASME B16.5 #1500 RTJ
2500RTJ	ASME B16.5 #2500 RTJ
Clamp	
GR*	Grayloc® compatible hub (Grayloc® is a registered trademark of Grayloc Products, L.L.C.)

Hybrid Seats (24-27)

24		25-26		27
Insert material		Seat Configuration		Seal Type
C	PCTFE	00	Unidirectional Spring-Loaded Hybrid Seats	5 Seal 1: TFM; Seal 2: Expanded graphite
				6 Seal 1: TFM

Special Features (24-30)	
Vxx	V port
VBxx	Characterized control ball
6.0	Short bonnet

* Not available for 1¼" (DN32) Valves

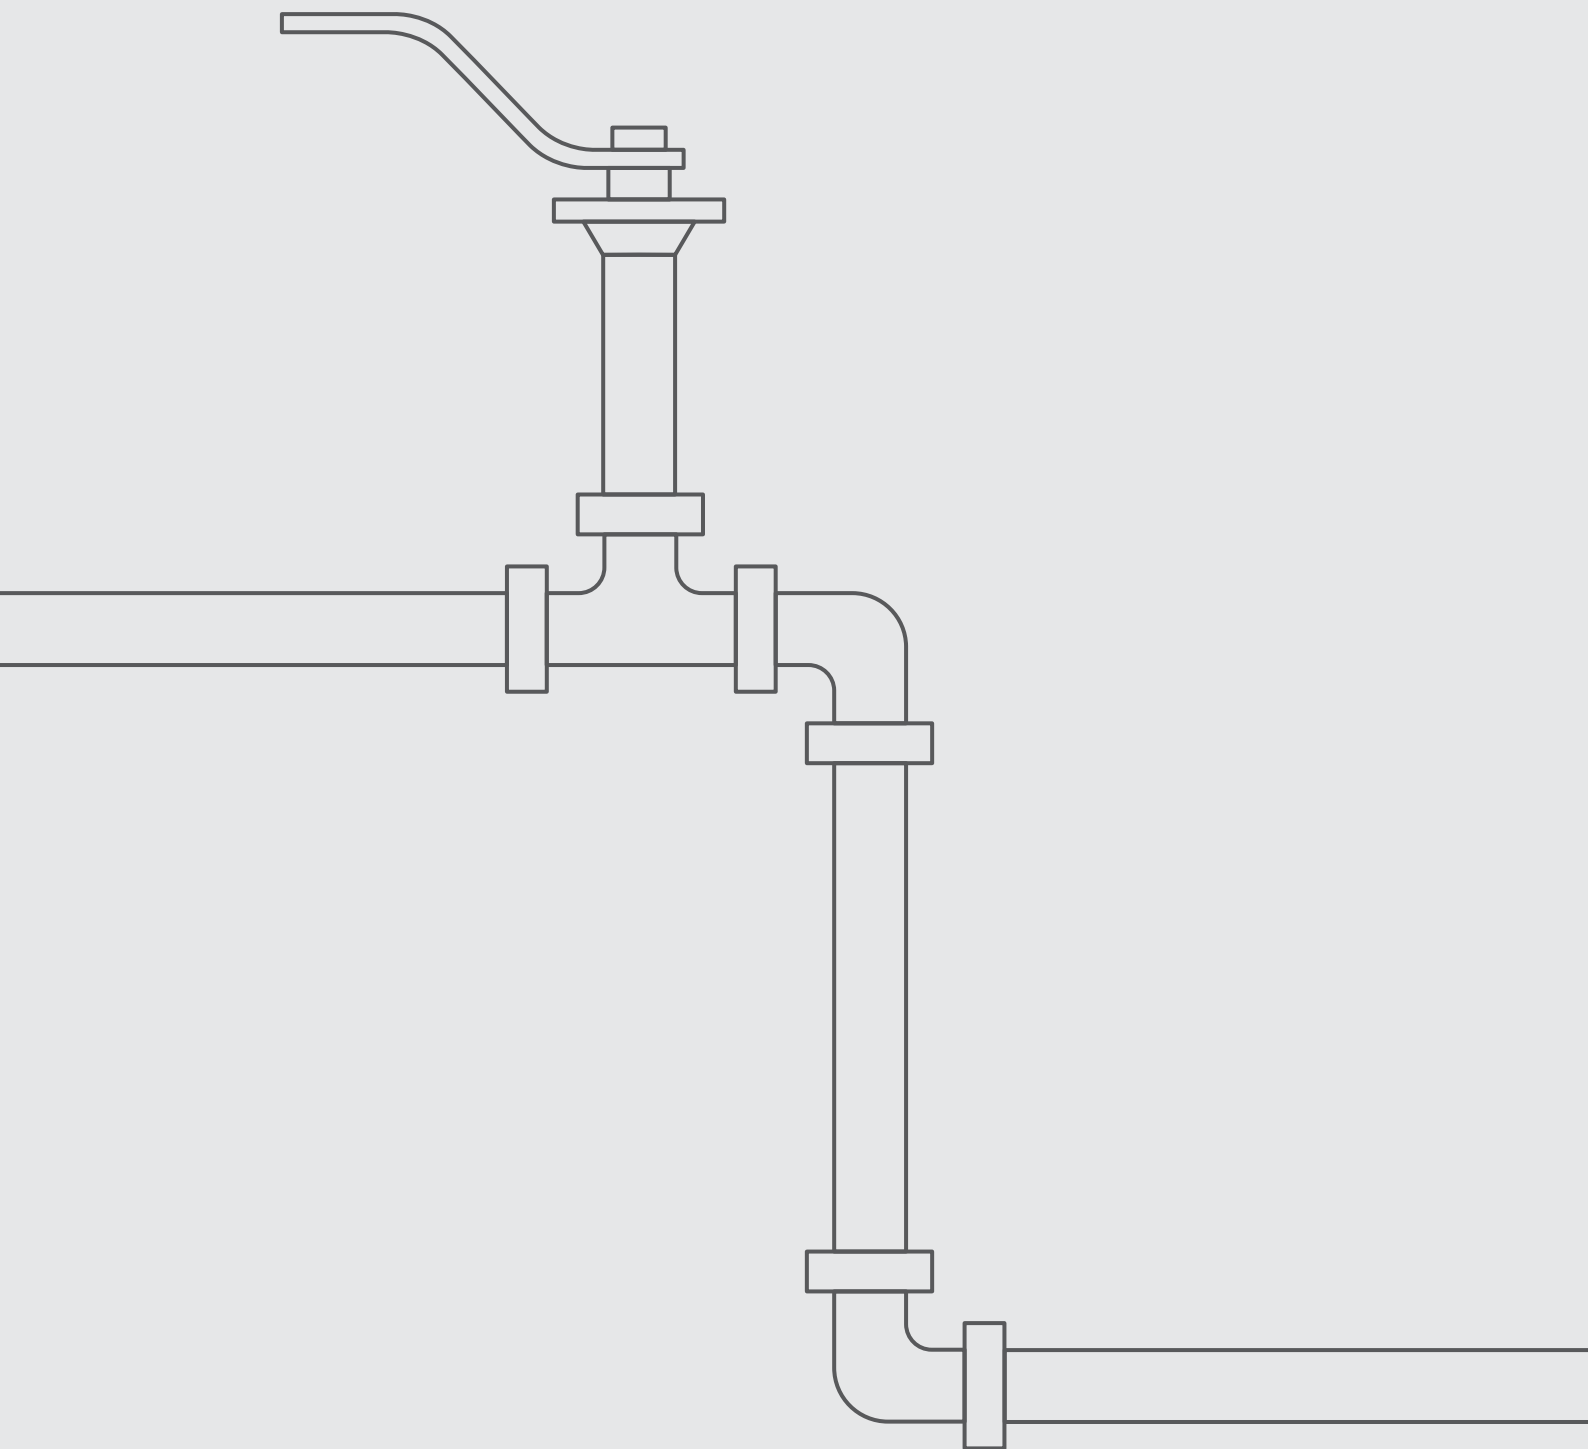

DC47

C61

C62

DC61


DC62



Cryogenic Valves


FLOATING BALL

DIVERter
MULTIport

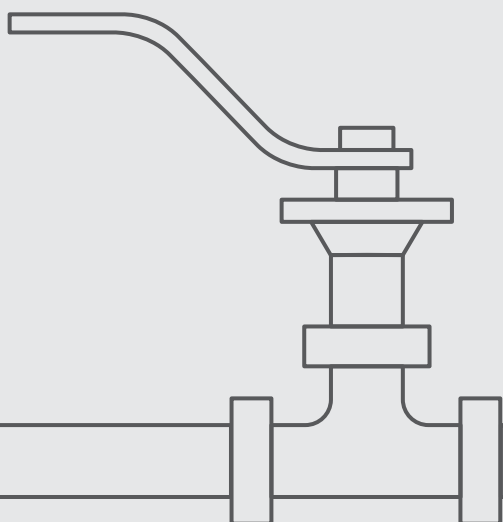


Cryogenic Diverter Bottom Entry Floating Ball

Valve Dimensions

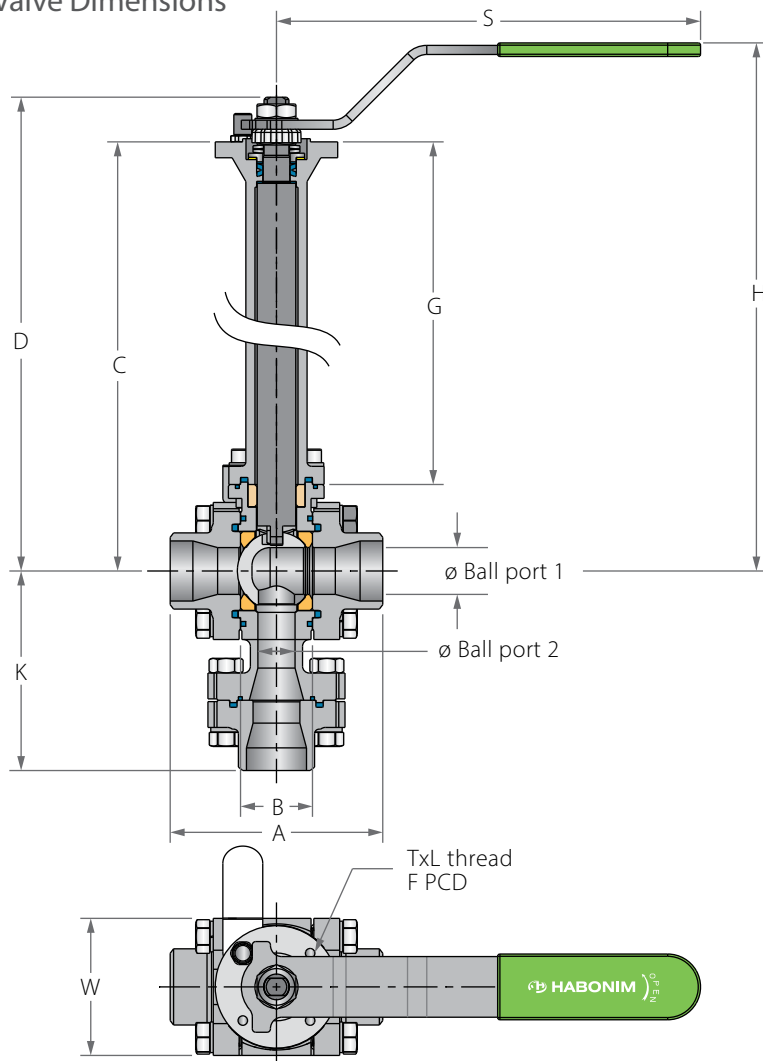

Preparation for actuation

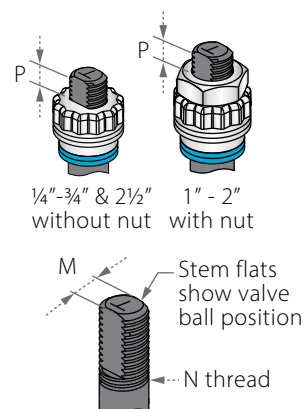


Std. port	Full Port	Unit	Ball port1	Ball port2	A	B	Standard design				6" bonnet				K	S	W	M	N	P	F	TxL	Weight kg/lb	
							C	D	H	G	C	D	H	G									Std.	6"
DN15	DN10	mm	10.5	9.5	65.8	20.6	333.0	341.9	367.3	304.0	181.4	190.3	215.7	152.4	88.2	150.0	45.8	5.5	3/8" UNF	7.2	36.0	M5X7	1.79	1.47
½"	¾"	inch	0.41	0.37	2.59	0.81	13.11	13.46	14.46	11.97	7.14	7.49	8.49	6.0	3.47	5.91	1.8	0.22	0.28	F03	1.42	M5X7	3.93	3.23
DN20	DN15	mm	14.3	11.9	70.55	24.55	335.4	344.3	369.6	304.0	183.8	192.7	218.0	152.4	93.7	150.0	52.1	5.5	3/8" UNF	7.2	36.0	M5X7	1.52	1.20
¾"	½"	inch	0.56	0.47	2.78	0.97	13.2	13.56	14.55	11.97	7.24	7.59	8.58	6.0	3.69	5.91	2.05	0.22	0.28	F03	1.42	M5X7	3.35	2.64
DN25	DN20	mm	20.65	15.9	93.75	31.75	342.15	359.65	387.0	304.0	190.55	208.05	235.4	152.4	119.0	187.0	60.45	7.54	7/16" UNF	7.2	42.0	M5X7	3.19	2.84
1"	¾"	inch	0.81	0.63	3.69	1.25	13.47	14.16	15.24	11.97	7.5	8.19	9.27	6.0	4.69	7.32	2.38	0.3	0.28	F04	1.65	M5X7	7.02	6.25
DN32	DN25	mm	25.4	20.5	108.0	41.25	346.65	364.15	388.0	304.0	195.05	212.55	236.4	152.4	130.15	187.0	68.8	7.54	7/16" UNF	7.2	42.0	M5X7	4.21	3.75
1¼"	1"	inch	1.0	0.81	4.25	1.62	13.65	14.34	15.28	11.97	7.68	8.37	9.31	6.0	5.12	7.36	2.71	0.3	0.28	F04	1.65	M5X7	9.25	8.24
DN40	DN32	mm	26.6	31.8	115.35	48.35	347.55	377.05	404.0	304.0	195.95	225.45	252.4	152.4	139.0	237.0	79.15	8.71	9/16" UNF	8.0	50.0	M6X8	5.22	4.65
1½"	1¼"	inch	1.05	1.25	4.54	1.90	13.68	14.84	15.91	11.97	7.71	8.88	9.94	6.0	5.47	9.29	3.12	0.34	0.31	F05	1.97	M6X8	11.51	10.25
DN50	DN40	mm	38.15	35.0	127.9	56.3	352.25	381.75	409.0	304.0	200.65	230.15	257.4	152.4	149.45	237.0	90.7	8.71	9/16" UNF	8.5	50.0	M6X8	6.68	6.11
2"	1½"	inch	1.50	1.38	5.04	2.22	13.87	15.03	16.1	11.97	7.90	9.06	10.13	6.0	5.88	9.29	3.57	0.34	0.33	F05	1.97	M6X8	14.72	13.47



Cryogenic Diverter Bottom Entry Floating Ball

Components & Materials

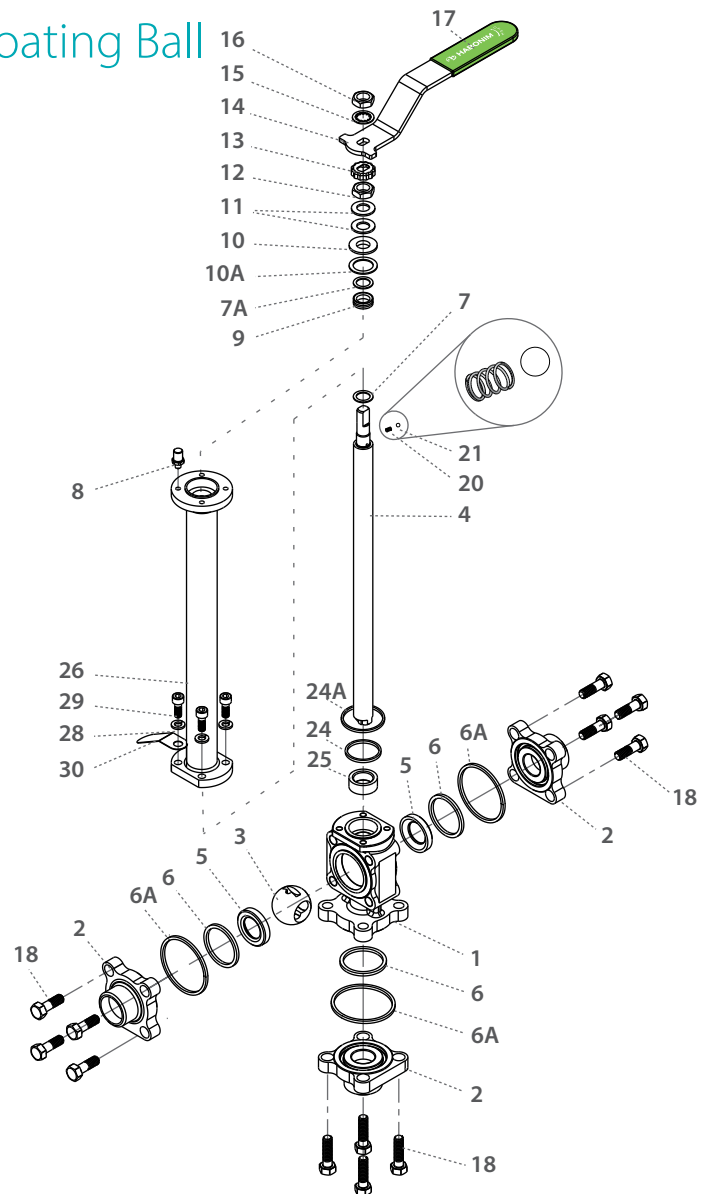


Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	End	Acc. Ordering Code	3
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	2
6*	Body Seal	TFM	3
6A*	Secondary Seal	Graphite, TFM	2
7*	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
8	Stop Pin	S. Steel	1
9*	Stem Seal	TFM	1
10	Follower	S. Steel	1
10A*	Slide Bearing	S. Steel	1
11	Disc Spring	S. Steel	2
12	Stem Nut	S. Steel	1
13	Locking Clip	S. Steel	1
14	Handle	S. Steel	1

Item	Description	Material specifications	Qty.
15	Serrated Washer	S. Steel	1
16	Handle Nut	S. Steel	1
17	Sleeve	PVC	1
18	Body Bolt	S. Steel	12
20	Anti-Static Spring	S. Steel	1
21	Anti-Static Plunger	S. Steel	1
23	Tag (not shown)	S. Steel	1
24*	Bonnet Seal	TFM	1
24A*	Bonnet Secondary Seal	Acc. Ordering Code	1
25*	Stem Bearing	PTFE	1
26	Bonnet	S. Steel	1
28	Bolt	S. Steel	12
30	Dog Tag	S. Steel	1
26	Bonnet	S. Steel	1
28	Bolt	S. Steel	4
30	Dog Tag	S. Steel	1


* Maintenance kit components

Cryogenic Diverter Bottom Entry Floating Ball

Valve Dimensions

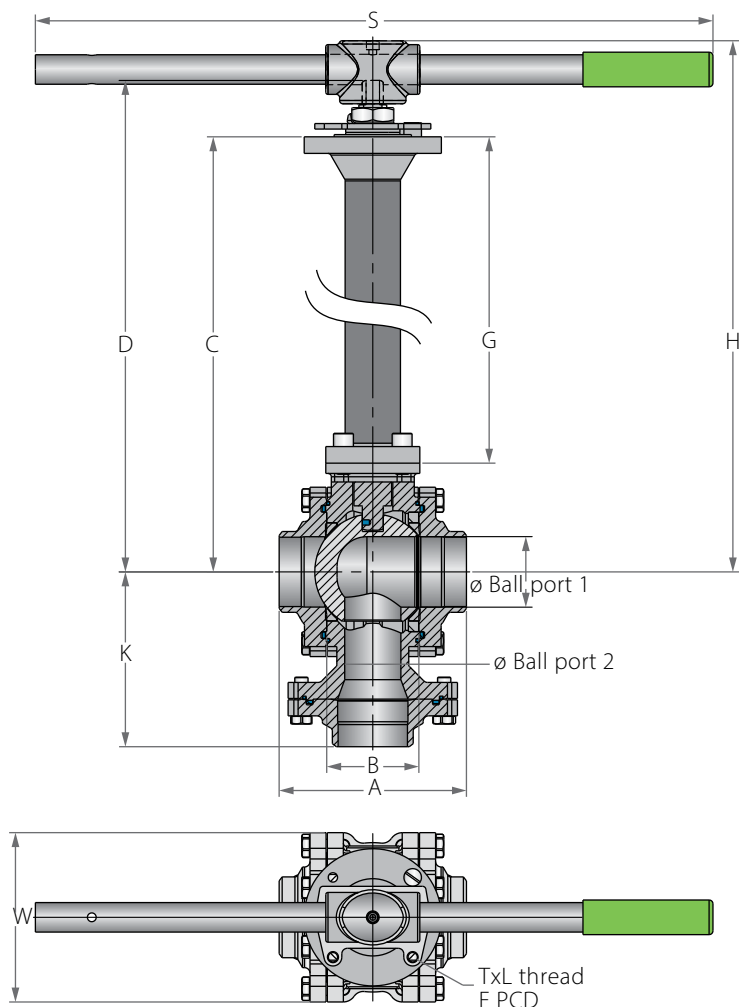

Preparation for actuation

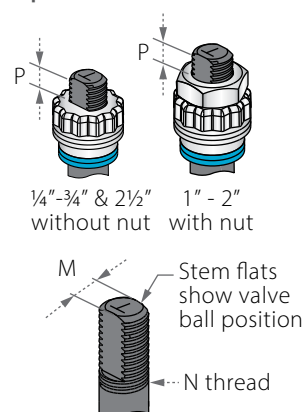


Std. port	Full Port	Unit	Ball port1	Ball port2	A	B	Standard design				6" bonnet				K	S	W	M	N	P	F	TxL	Weight kg/lb	
							C	D	H	G	C	D	H	G									Std.	6"
DN65	DN50	mm	51.0	48.0	157.95	72.55	397.5	439.1	464	327.5	222.4	264.0	288.9	152.4	132.7	400.0	108.0	13.9	M20x2.5	13.15	70.0	M8x8	16	14.5
2½"	2"	inch	2.01	1.89	6.22	2.86	15.65	17.29	18.27	12.89	8.76	10.39	11.37	6.00	5.22	15.79	4.25	0.55		0.52	F07	2.76	35.20	31.90
DN80	DN65	mm	63.75	50.8	169.35	83.25	441.8	488.4	528	343.5	250.7	297.3	336.9	152.4	158.01	610.0	153.0	18.9	1-14"	16.7	102.0	M10x18	24.5	23
3"	2½"	inch	2.51	2.0	6.67	3.28	17.39	19.23	20.79	13.52	9.87	11.70	13.26	6.00	6.22	15.79	6.02	0.74	UNS-2A	0.66	F010	4.02	53.90	50.60



Cryogenic Diverter Bottom Entry Floating Ball

Components & Materials

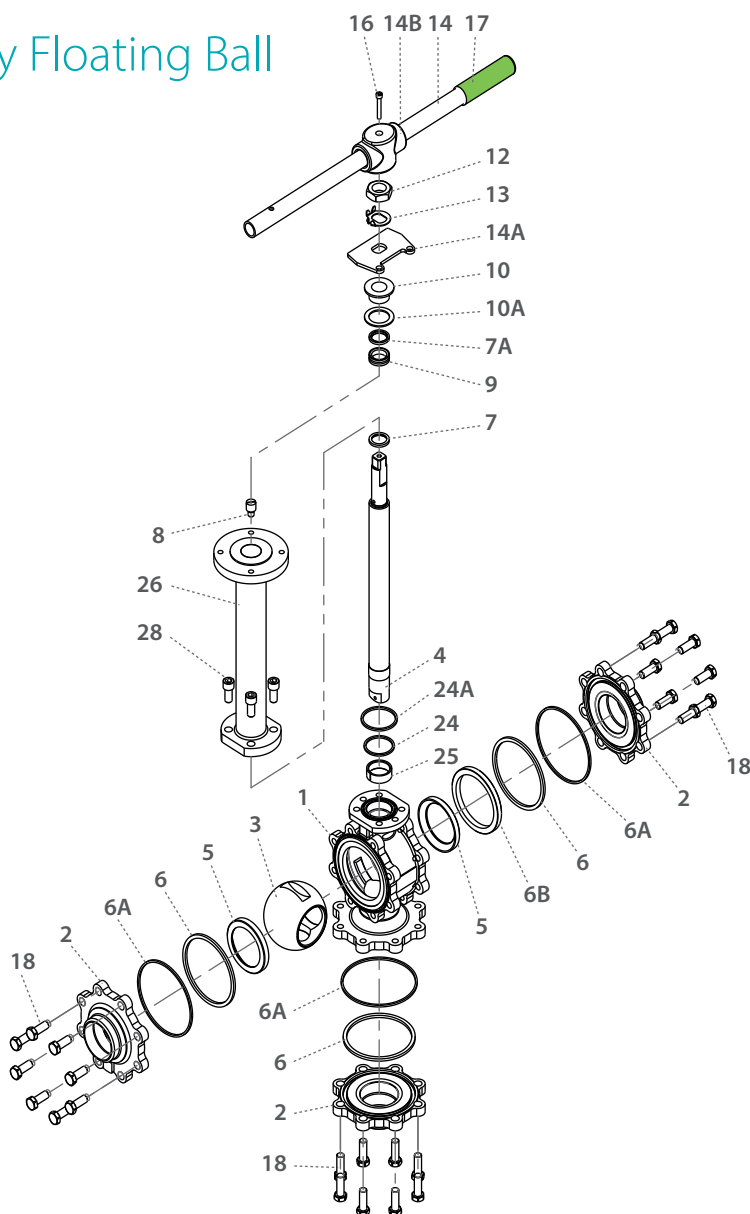

Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	Ends	Acc. Ordering Code	3
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	2
6*	Inner seal	TFM	3
6A*	Outer seal	Graphite, TFM	3
6B	Support Ring	S. Steel	1
7*	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
8	Stop Pin	S. Steel	1
9*	Stem Seal	TFM	1
10	Follower	S. Steel	1
10A*	Slide Bearing	S. Steel	1

Item	Description	Material specifications	Qty.
12	Stem Nut	S. Steel	1
13	Locking Clip	S. Steel	1
14	Handle	S. Steel	1
14A	Stop Plate	S. Steel	1
14B	Wrench Head	S. Steel	1
16	Wrench Bolt	S. Steel	1
17	Sleeve	PVC	1
18	Body Bolt	S. Steel	24
24*	Bonnet Inner Seal	S. Steel	1
24A*	Bonnet Outer Seal	S. Steel	1
25	Stem Bearing	PTFE	1
26	Bonnet	S. steel 316	1
28	Bonnet Bolt	S. Steel	4

* Maintenance kit components



Cryogenic Floating Ball Multiport - Ordering Code System

"Mandatory option" options are marked with **green background** | "Standard offer" options are marked with **light green background**

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	.	.	30
2	0		F	D	C	4	7	W	-	6	6	6	M	A	A	G	/	B	W			-				
Size		Features			Series		Design	Body material		Ends material	Ball material	Stem material	Seat material	Inner Seal	Outer Seal	End connection			Special features							

Size (1-2)		
Code	inch	mm
05	½"	15
07	¾"	20
10	1"	25
12	1¼"	32
15	1½"	40
20	2"	50
25	2½"	65
30	3"	80

* Full port only

Features (3-6)	
D	Diverter bottom entry
C	Cryogenic design
F	Fire safe
B	Full port
Series (7-8)	
47	3 Piece Floating

Design (9)	
W	Total HermetiX Integrity package
Body material (11)	
6	S. Steel
End material (12)	
6	S. Steel
Ball material (13)	
6	S. St. 316L
Stem material (14)	
M	High Strength S. Steel
Z	Inconel
Seat material (15)	
A	TFM
C	PCTFE
P	CF PTFE
Inner Seal Material (16)	
A	TFM
G	Expanded graphite
Outer Seal Material (17)	
G	Expanded graphite
A	TFM
Special Features (24-30)	
B	Body made from rolled bar
BSQ	Body made from square bar
6.0	Short bonnet
90	90 degrees rotation
180	180 degrees rotation applicable for bottom entry diverter valve L

End connections	
Welded	
BW10	Buttweld schd. 10
BW	Buttweld schd. 40
XBW10	Extended buttweld schd. 10
XBW	Extended buttweld schd. 40
BW5	Buttweld schd. 5
BW80	Buttweld schd. 80
BWO *	Buttweld tube OD
BWD	Buttweld DIN 11860
BW1.6	buttweld ISO 1127 1.6mm
BW2.0	buttweld ISO 1127 2.0mm
BW2.3	buttweld ISO 1127 2.3mm
SW	Socket weld
SWO *	Socket weld tube OD
XBW80	Extended buttweld 80
XSW	Extended socket weld
ETO *	Extended tube OD
ET1.6	Extended buttweld ISO 1127 1.6mm
ET2.0	Extended buttweld ISO 1127 2.0mm
ET2.3	Extended buttweld ISO 1127 2.3mm
ETD	Extended buttweld DIN 11850

* Std. port only

Threaded	
NPT	ASME B1.20.1 - National Pipe Taper thread
MNPT	Male NPT
BSPT	EN 10226 - Pipe Taper thread
MBSPT	Male BSPT
BSPP	ISO228-1, DIN3852 - Pipe parallel thread
DIN3852	DIN3852 - Pipe Parallel thread
AS5202	SAE internal straight thread

Flanged	
150	ASME B16.5 #150 RF
300	ASME B16.5 #300 RF
600	ASME B16.5 #600 RF
900	ASME B16.5 #900 RF
PN16	EN1092 PN16 RF
PN40	EN1092 PN40 RF
PN63	EN1092 PN63 RF
PN100	EN1092 PN100 RF
PN160	EN1092 PN160 RF

Clamp	
LL *	Compression fitting (Imperial) - No nuts & Ferrules
LM *	Compression fitting (metric) - No nuts & Ferrules
LL-NF *	Compression fitting (Imperial) - with nuts & Ferrules
LM-NF *	Compression fitting (metric) - with nuts & Ferrules
TC *	Tri-Clamp
GR**	Grayloc® compatible hub (Grayloc® is a registered trademark of Grayloc Products, L.L.C.)


* Std. port only

** Not available for 1¼" (DN32) Valves




Cryogenic Multiport Floating Ball

Valve Dimensions

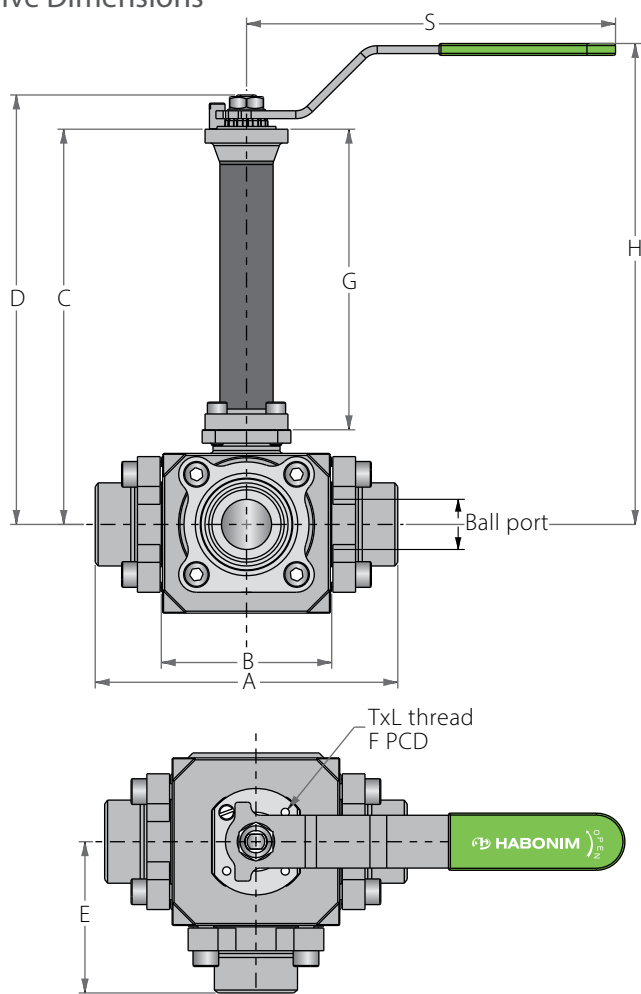

Preparation for actuation

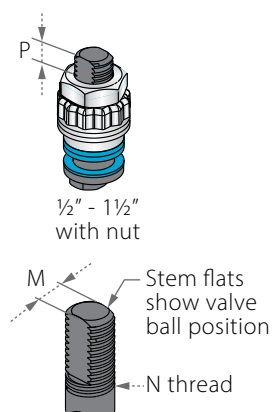


Valve Face To Face sizes are according to Habonim catalog data only, for Extended-weld/Flanged/Tri-clamp end see Face To Face sizes page.

Std. port	Full port	Ball port	A	B	Standard design				6" bonnet				E	S	M	N	P	TxL	F	PCD	Weight kg/lb	
					C	D	H	G	C	D	H	G									Std.	6"
DN20	DN15	14.3	113.0	67.0	342.1	359.6	384.0	304.0	190.5	208.0	232.0	152.0	A/2	187.0	7.54	7/16"	5.8	M5X8	F04	42.0	3.8	3.3
3/4"	1/2"	0.56	4.45	2.64	13.47	14.16	15.12	11.97	7.50	8.19	9.15	6.0		7.36	0.30	UNF	0.23			1.65	8.36	7.26
DN25	DN20	20.6	143.6	81.6	347.0	364.5	389.0	304.0	195.4	212.9	237.0	152.0		187.0	7.54	7/16"	5.8	M5X8	F04	42.0	5.3	4.8
1"	3/4"	0.81	5.65	3.21	13.66	14.35	15.31	11.97	7.69	8.38	9.34	6.0		7.36	0.30	UNF	0.23			1.65	11.66	10.56
DN32	DN25	25.4	153.4	86.4	352.0	369.5	394.0	304.0	200.4	217.9	242.0	152.0		187.0	7.54	7/16"	5.8	M5X8	F04	42.0	7.0	6.5
1 1/4"	1"	1.0	6.04	3.40	13.86	14.55	15.51	11.97	7.89	8.58	9.54	6.0		7.36	0.30	UNF	0.23			1.65	15.4	14.3
DN40	DN32	31.8	164.0	97.0	353.4	382.9	407.0	304.0	201.8	231.3	255.0	152.0		237.0	8.71	9/16"	7.8	M6X9	F05	50.0	9.0	8.5
1 1/2"	1 1/4"	1.25	6.46	3.82	13.91	15.07	16.02	11.97	7.94	9.11	10.06	6.0		9.33	0.34	UNF	0.31			1.97	19.8	18.7



Cryogenic Multiport Floating Ball

Components & Materials

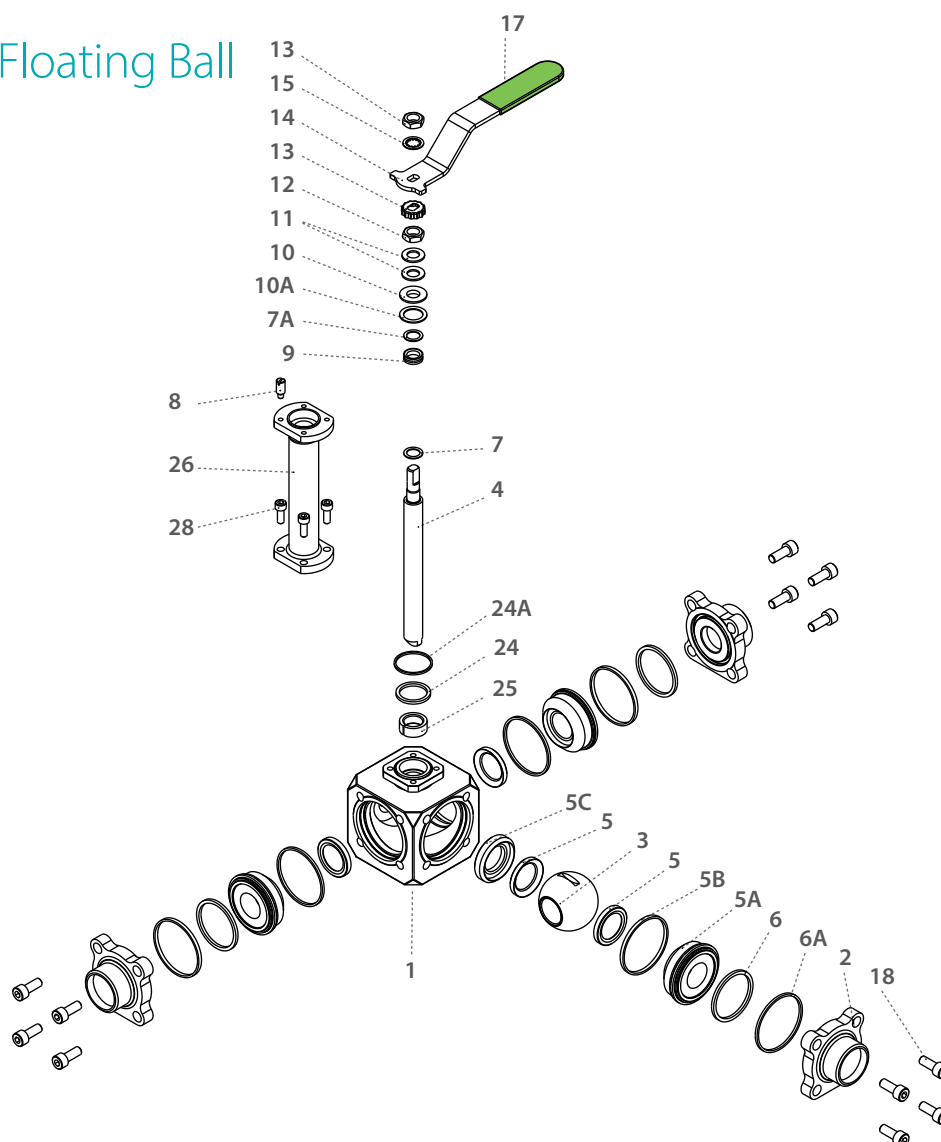


Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	Ends	Acc. Ordering Code	3
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	4
5A	Support seat	Acc. Ordering Code	3
5B*	Seat Seal	Acc. Ordering Code	3
5C	Back seat support	Acc. Ordering Code	1
6*	Inner seal	Acc. Ordering Code	3
6A	Outer seal	Acc. Ordering Code	3
7*	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
8	Stop Pin	S. Steel	1
9*	Stem Seal	TFM	1
10	Follower	S. Steel	1

Item	Description	Material specifications	Qty.
10A	Slide Bearing	S. Steel	1
11	Disc Spring	S. Steel	2
12	Stem Nut	S. Steel	1
13	Locking Clip	S. Steel	1
14	Handle	S. Steel	1
15	Serrated Washer	S. Steel	1
16	Handle Nut	S. Steel	1
17	Sleeve	PVC	1
18	Body Bolt	S. Steel	12
24*	Bonnet inner seal	Acc. Ordering Code	1
24A*	Bonnet outer seal	Acc. Ordering Code	1
25*	Stem Bearing	PTFE	1
26	Bonnet	S. Steel	1
28	Bolt	S. Steel	4



* Maintenance kit components

Cryogenic Floating Ball Multiport

Valve Dimensions

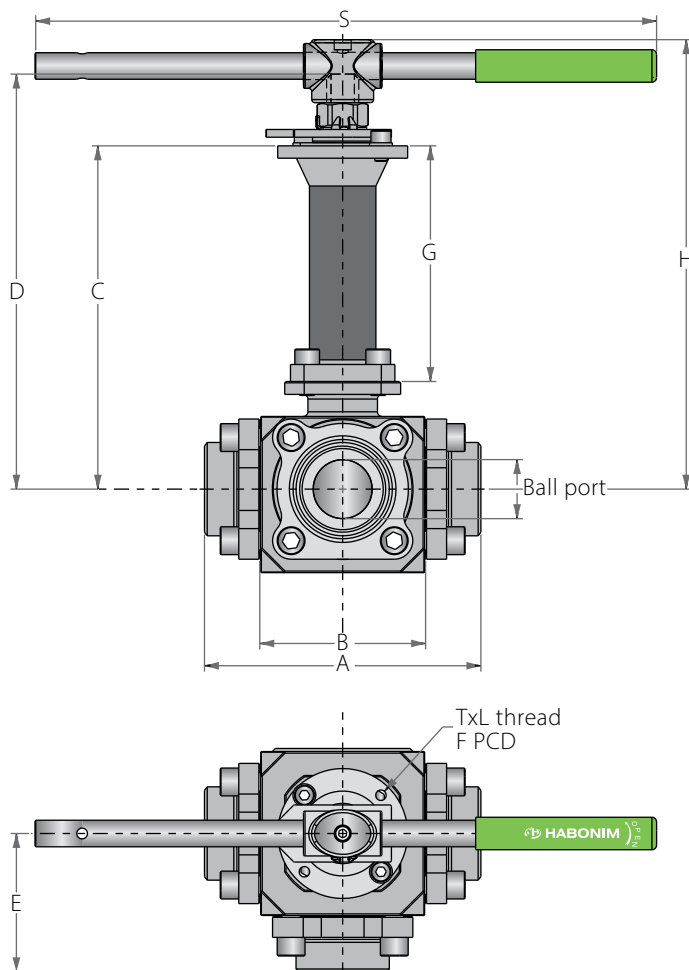

Preparation for actuation




Valve Face To Face sizes are according to Habonim catalog data only, for Extended-weld/Flanged/Tri-clamp end see Face To Face sizes page.

Std. port	Full port	Ball port	A	B	Standard design				Standard design				E	S	M	N	P	TxL	F	PCV	Weight kg/lb	
					C	D	H	G	C	D	H	G									Std.	6"
DN50	DN40	38.1	177.2	107.2	396.7	438.3	465.0	327.0	187.4	187.4	256.0	152.0	A/2	400.0	13.9	M20x2.5	13.5	M8X10	F07	70.0	16.0	14.5
2"	1½"	1.50	6.98	4.22	15.62	17.26	18.32	12.87	7.38	7.38	10.08	6.0		15.75	0.55		0.53			2.76	35.2	31.9
DN65	DN50	48.0	210.4	125.0	406.1	447.7	475.0	327.0	195.1	195.1	264.0	152.0		400.0	13.9	M20x2.5	13.5	M8X10	F07	70.0	22.5	21.0
2½"	2"	1.89	8.28	4.92	15.99	17.63	18.69	12.87	7.68	7.68	10.38	6.0		15.75	0.55		0.53			2.76	49.5	46.2



Cryogenic Floating Ball Multiport

Components & Materials

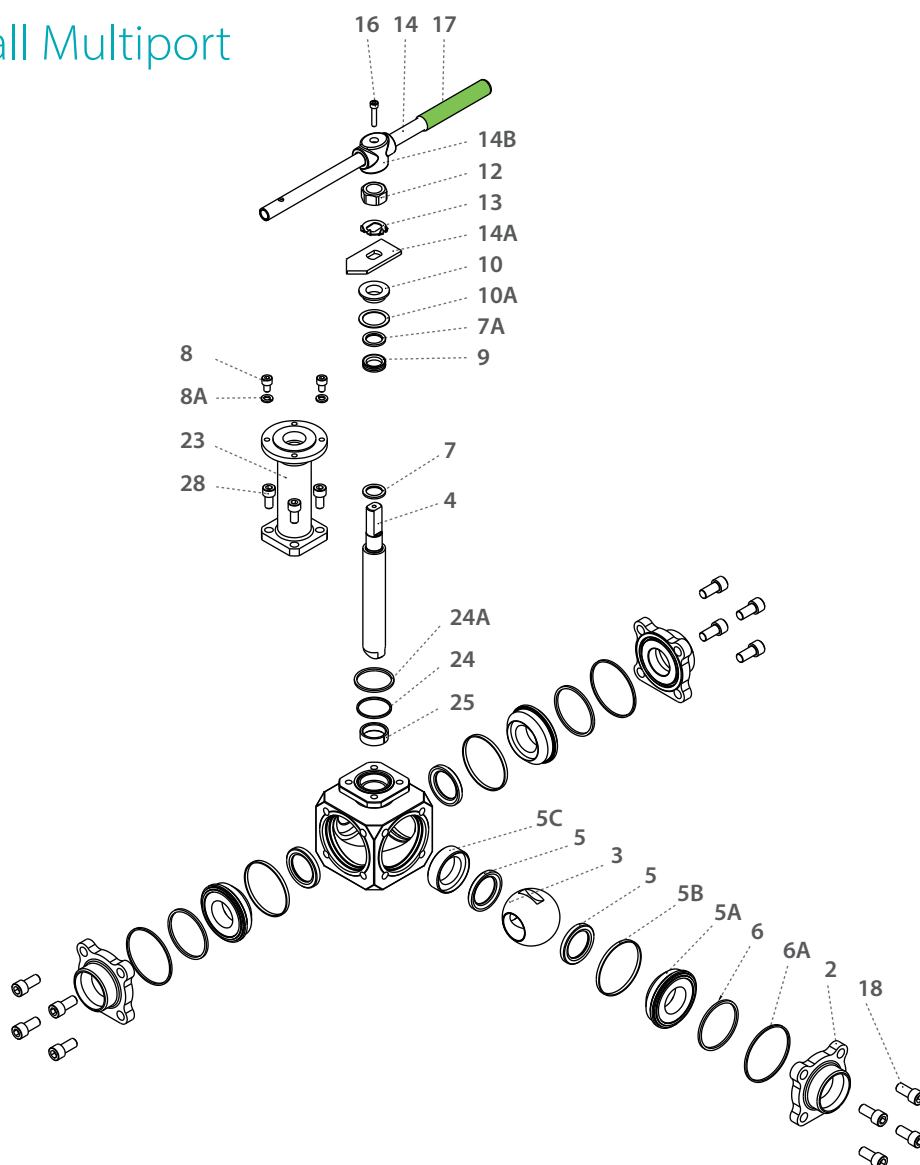


Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	Ends	Acc. Ordering Code	3
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	4
5A	seat Support	Acc. Ordering Code	3
5B*	Seat Seal	Acc. Ordering Code	3
5C	Back seat support	Acc. Ordering Code	1
6*	Inner seal	Acc. Ordering Code	3
6A*	Outer seal	Acc. Ordering Code	3
7*	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
8	Stop Pin	S. Steel	2
8A	Spring washer	S. Steel	2
9*	Stem Seal	TFM	1

Item	Description	Material specifications	Qty.
10	Follower	S. Steel	1
10A*	Slide Bearing	S. Steel	1
12	Stem Nut	S. Steel	1
13	Locking clip	S. Steel	1
14	Handle	S. Steel	1
14A	Stop Plate	S. Steel	1
14B	Wrench Head	S. Steel	1
16	Wrench Bolt	S. Steel	1
17	Sleeve	PVC	1
18	Body bolts	S. Steel	12
24*	Bonnet inner seal	Acc. Ordering Code	1
24A*	Bonnet outer seal	Acc. Ordering Code	1
25*	Stem Bearing	PTFE	1
26	Bonnet	S. Steel	1
28	Bolt	S. Steel	4



* Maintenance kit components

Cryogenic Floating Ball Multiport

Valve Dimensions

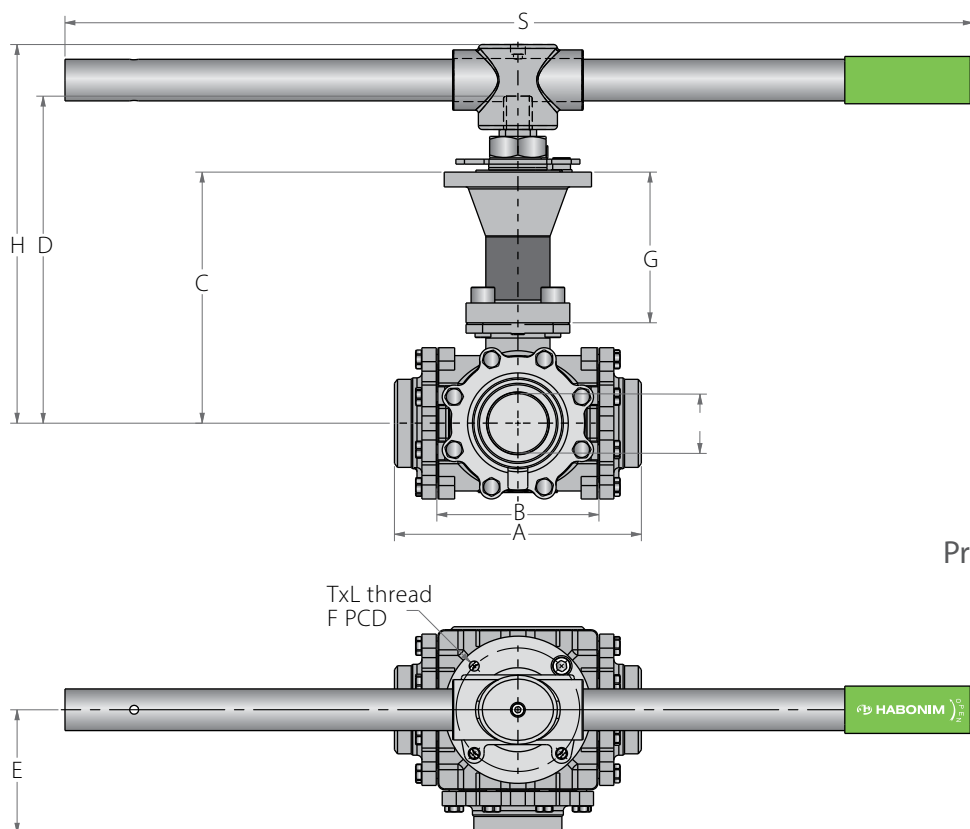

Preparation for actuation




Valve Face To Face sizes are according to Habonim catalog data only, for Extended-weld/Flanged/Tri-clamp end see Face To Face sizes page.

Std. port	Full port	Unit	Ball port	A	B	Standard design				6" bonnet				E	S	M	MDD	N	P	F	TxL	Weight kg/lb	
						C	D	H	G	C	D	H	G									Std.	6"
DN80	DN65	mm	60.0	249.8	164.0	486.75	555.85	624.65	254.15	244.43	323.25	274.5	152.4	124.9	916.0	28.45	23.75	1½"-12	26.2	125	M12X15	42.4	41.2
3"	2½"	inch	2.36	9.83	6.46	19.16	21.88	24.59	10.01	9.62	12.73	10.8	6.0	4.91	36.0	1.12	0.94	UNF-2A	1.03	4.92	M12X15	93.45	90.8
DN100	DN80	mm	76.0	309.8	205.0	519.5	588.6	624.65	286.9	257.13	356.0	274.5	152.4	154.9	916.0	28.45	23.75	1½"-12	26.2	125	M12X15	66.4	65.2
4"	3"	inch	2.99	12.2	8.07	20.45	23.17	24.59	11.3	10.12	14.02	10.8	6.0	11.1	36.0	1.12	0.94	UNF-2A	1.03	4.92	M12X15	146.35	143.7



Cryogenic Floating Ball Multiport

Components & Materials

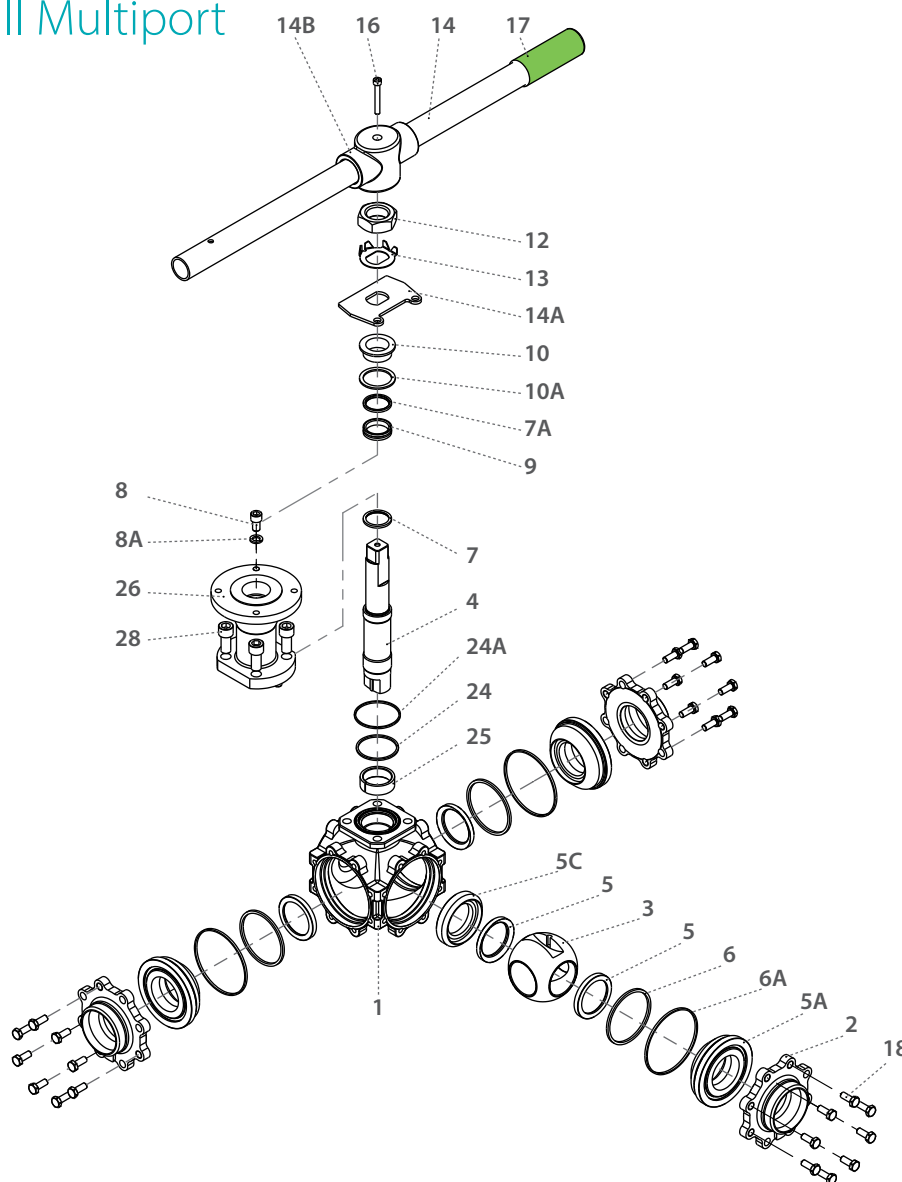

Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	End	Acc. Ordering Code	3
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	4
5A	Seat Housing	S. Steel	3
5B*	Seat Seal	PTFE, Graphite	3
5C	Seat Support	A479 316/316L, B574 N06022, Bronze RG5	1
6*	Body Seal	PTFE, Graphite	3
7*	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
8	Stop Pin	S. Steel	1
9*	Stem Seal	TFM	1
10	Follower	S. Steel	1
10A*	Slide Bearing	S. Steel	1
11	Disc Spring	S. Steel	2


Item	Description	Material specifications	Qty.
12	Stem Nut	S. Steel	1
13	Tab Lock Washer	S. Steel	1
14**	Handle	S. Steel	1
14A	Stop Plate	S. Steel	1
14B	Wrench Head	S. Steel	1
16	Wrench Bolt	S. Steel	1
17	Sleeve	PVC	1
18	Body Bolt	S. Steel	32
18A	Spring Washer	S. Steel	32
20	Anti-Static Spring	S. Steel	2
21	Anti-Static Plunger	S. Steel	2
23	Tag (not shown)	S. Steel	1
24*	Bonnet Seal	PTFE, Graphite	1
25*	Stem Bearing	PTFE	1
26	Bonnet	S. Steel	1
28	Bolt	S. Steel	4
30	Dog Tag	S. Steel	1

* Maintenance kit components


** Gear operator should be used for size 3" DN80 and above (handle components are not included)

Cryogenic Multiport Floating Ball

Valve Dimensions

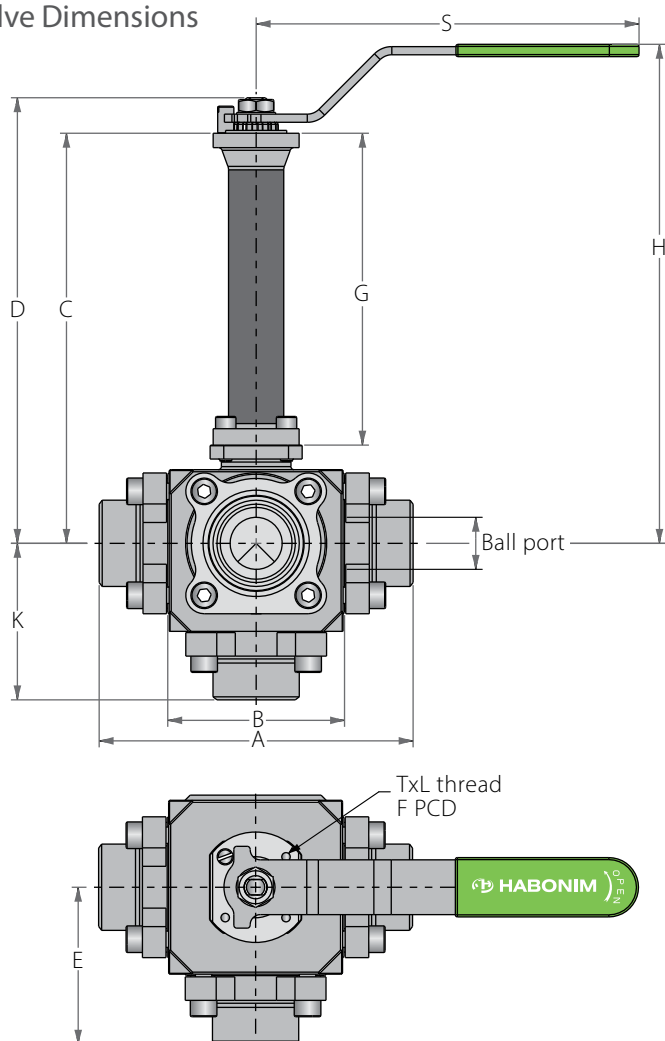

Preparation for actuation

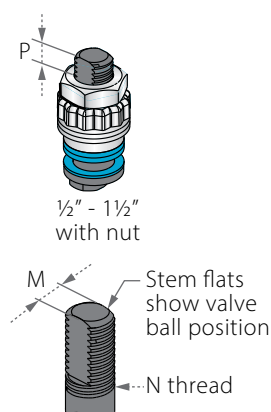


Valve Face To Face sizes are according to Habonim catalog data only, for Extended-weld/Flanged/Tri-clamp end see Face To Face sizes page.

Std. port	Full port	Unit	Ball port	A	B	Standard design				6" bonnet				E	S	M	N	P	TxL	F	PCD	Weight kg/lb	
						C	D	H	G	C	D	H	G									Std.	6"
DN20	DN15	mm	14.3	113.0	67.0	342.1	359.6	384.0	304.0	190.5	208.0	232.0	152.0	A/2	187.0	7.54	¾" UNF	5.8	M5X8	F04	42.0	3.8	3.3
¾"	½"	inch	0.56	4.45	2.64	13.47	14.16	15.12	11.97	7.50	8.19	9.15	6.0		7.36	0.30		0.23			1.65	8.36	7.26
DN25	DN20	mm	20.6	143.6	81.6	347.0	364.5	389.0	304.0	195.4	212.9	237.0	152.0		187.0	7.54	¾" UNF	5.8	M5X8	F04	42.0	5.3	4.8
1"	¾"	inch	0.81	5.65	3.21	13.66	14.35	15.31	11.97	7.69	8.38	9.34	6.0		7.36	0.30		0.23			1.65	11.66	10.56
DN32	DN25	mm	25.4	153.4	86.4	352.0	369.5	394.0	304.0	200.4	217.9	242.0	152.0		187.0	7.54	¾" UNF	5.8	M5X8	F04	42.0	7.0	6.5
1¼"	1"	inch	1.0	6.04	3.40	13.86	14.55	15.51	11.97	7.89	8.58	9.54	6.0		7.36	0.30		0.23			1.65	15.4	14.3
DN40	DN32	mm	31.8	164.0	97.0	353.4	382.9	407.0	304.0	201.8	231.3	255.0	152.0		237.0	8.71	¾" UNF	7.8	M6X9	F05	50.0	9.0	8.5
1½"	1¼"	inch	1.25	6.46	3.82	13.91	15.07	16.02	11.97	7.94	9.11	10.06	6.0		9.33	0.34		0.31			1.97	19.8	18.7



Cryogenic Multiport Floating Ball

Components & Materials

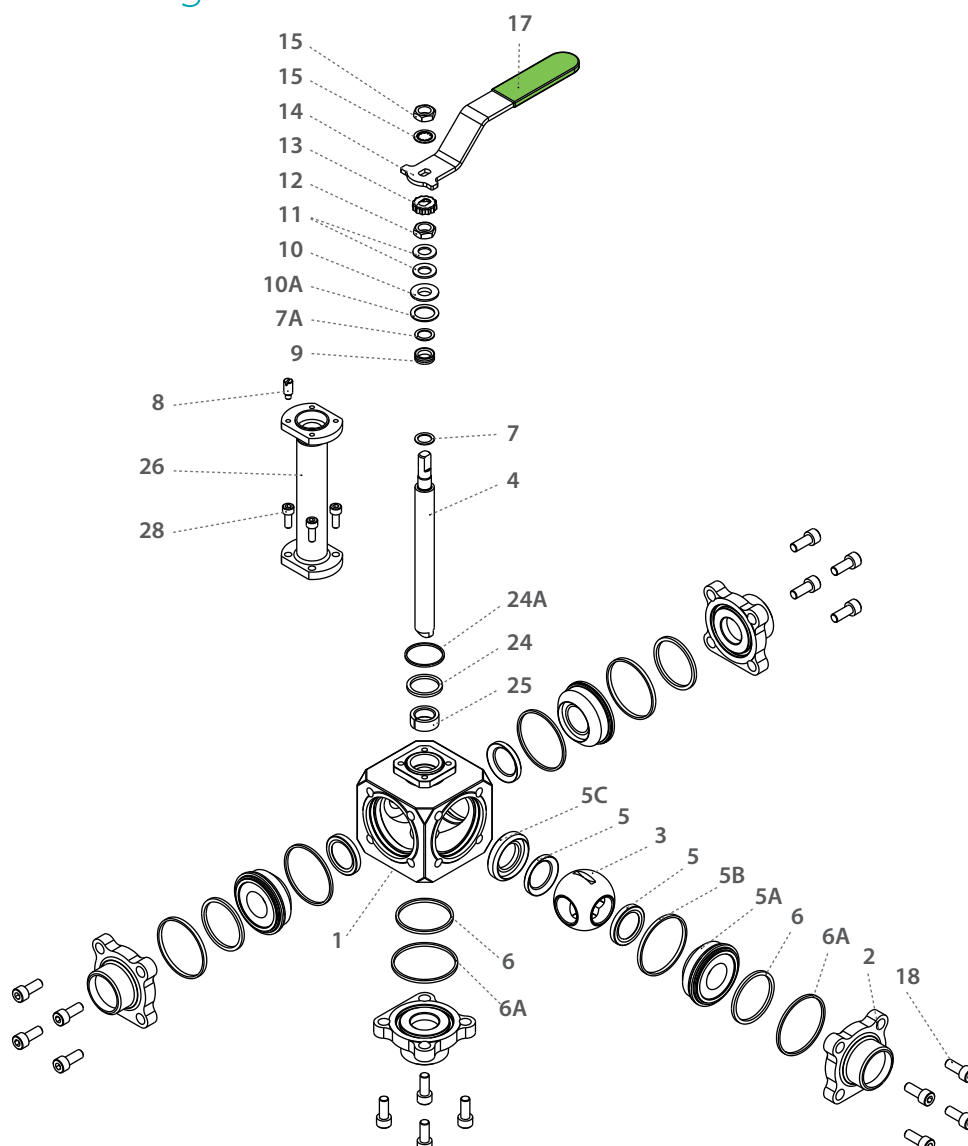


Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	Ends	Acc. Ordering Code	4
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	4
5A	Support seat	Acc. Ordering Code	3
5B*	Seat Seal	Acc. Ordering Code	3
5C	Back seat support	Acc. Ordering Code	1
6*	Inner seal	Acc. Ordering Code	4
6A*	Outer seal	Acc. Ordering Code	4
7*	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
8	Stop Pin	S. Steel	1
9*	Stem Seal	TFM	1
10	Follower	S. Steel	1

Item	Description	Material specifications	Qty.
10A	Slide Bearing	S. Steel	1
11	Disc Spring	S. Steel	2
12	Stem Nut	S. Steel	1
13	Locking Clip	S. Steel	1
14	Handle	S. Steel	1
15	Serrated Washer	S. Steel	1
16	Handle Nut	S. Steel	1
17	Sleeve	PVC	1
18	Body bolts	S. Steel	16
24*	Bonnet inner seal	Acc. Ordering Code	1
24A*	Bonnet outer seal	Acc. Ordering Code	1
25*	Stem Bearing	PTFE	1
26	Bonnet	S. Steel	1
28	Bolt	S. Steel	4



* Maintenance kit components

Cryogenic Floating Ball Multiport

Valve Dimensions

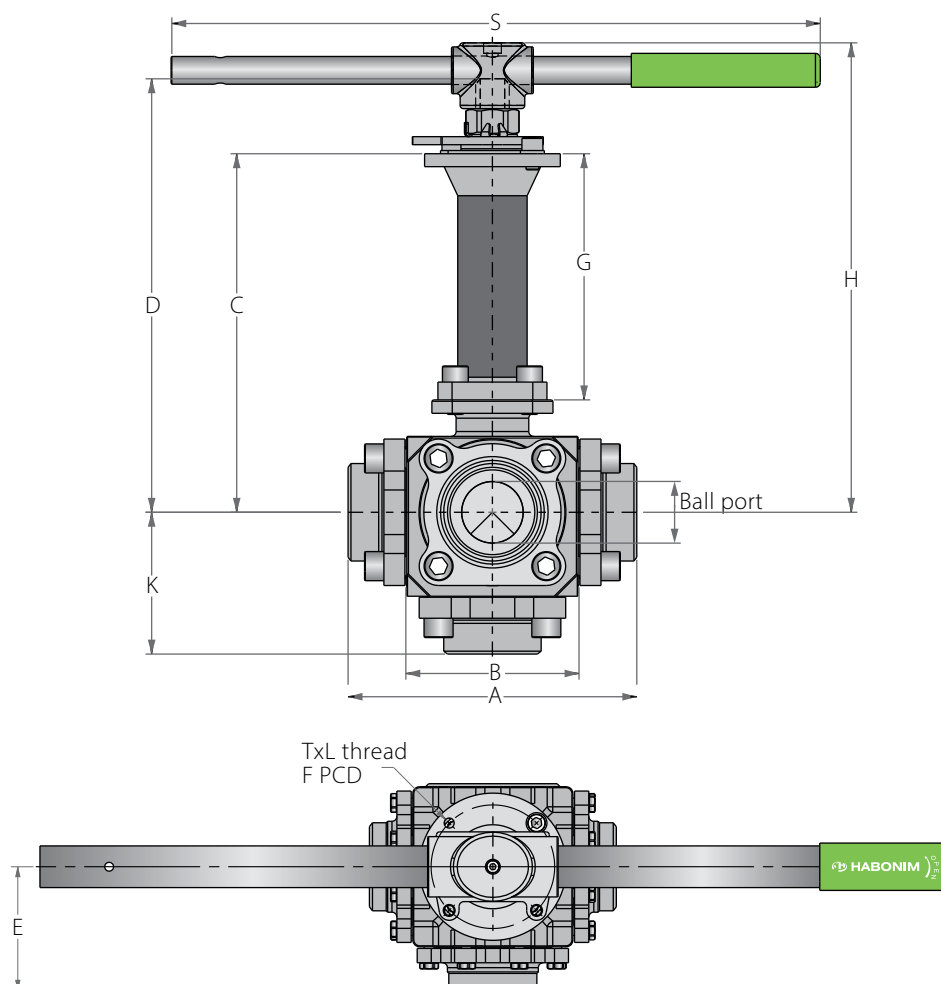

Preparation for actuation




Valve Face To Face sizes are according to Habonim catalog data only, for Extended-weld/Flanged/Tri-clamp end see Face To Face sizes page.

Std. port	Full port	Unit	Ball port	A	B	Standard design				Standard design				E	S	M	N	P	TxL	F	PCV	Weight kg/lb	
						C	D	H	G	C	D	H	G									Std.	6"
DN50	DN40	mm	38.1	177.2	107.2	396.7	438.3	465.0	327.0	187.4	187.4	256.0	152.0	A/2	400.0	13.9	M20x2.5	13.5	M8X10	F07	70.0	16.0	14.5
2"	1½"	inch	1.50	6.98	4.22	15.62	17.26	18.32	12.87	7.38	7.38	10.08	6.0		15.75	0.55		0.53			2.76	35.2	31.9
DN65	DN50	mm	48.0	210.4	125.0	406.1	447.7	475.0	327.0	195.1	195.1	264.0	152.0		400.0	13.9	M20x2.5	13.5	M8X10	F07	70.0	22.5	21.0
2½"	2"	inch	1.89	8.28	4.92	15.99	17.63	18.69	12.87	7.68	7.68	10.38	6.0		15.75	0.55		0.53			2.76	49.5	46.2



Cryogenic Floating Ball Multiport

Components & Materials

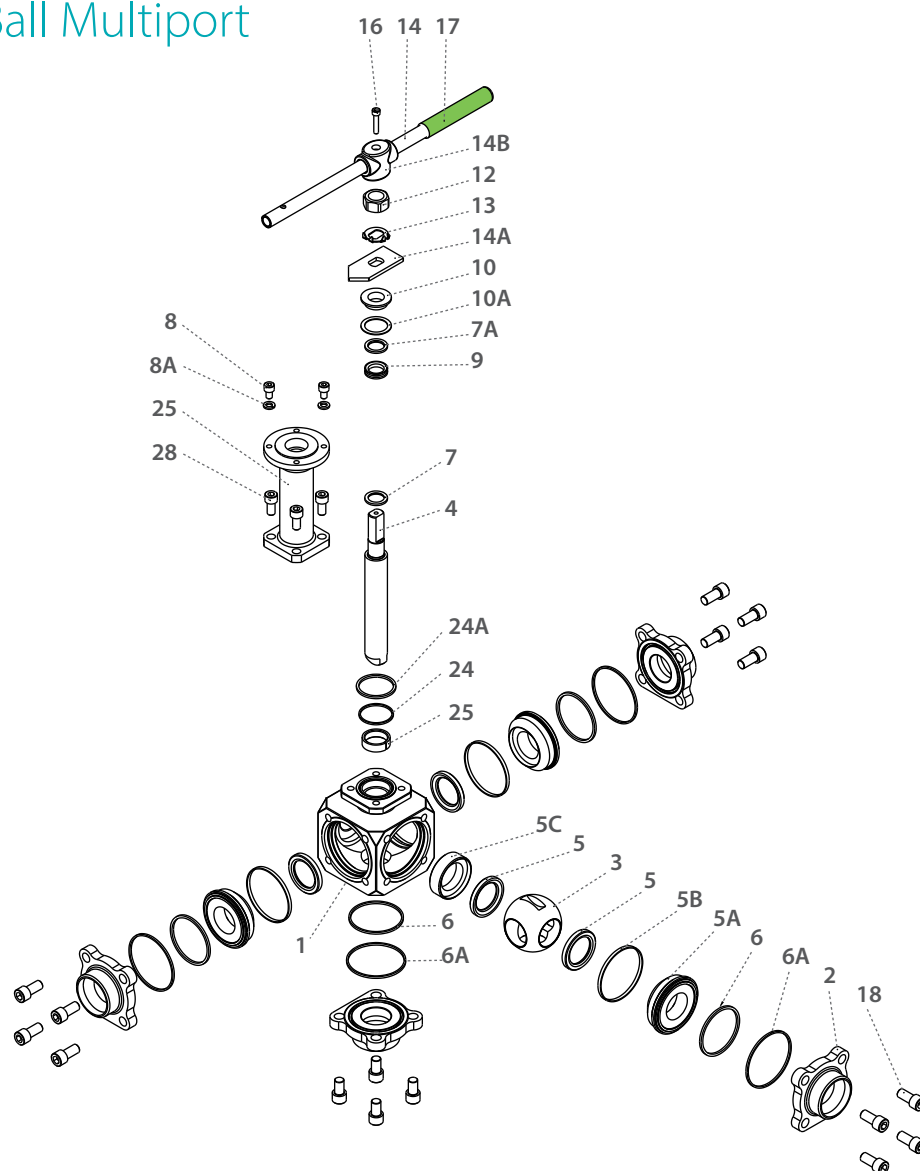


Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	Ends	Acc. Ordering Code	4
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	4
5A	Seat Support	Acc. Ordering Code	3
5B*	Seat Seal	Acc. Ordering Code	3
5C	Back Seat Support	Acc. Ordering Code	1
6*	Inner Seal	Acc. Ordering Code	4
6A*	Outer Seal	Acc. Ordering Code	4
7*	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
8	Stop Pin	S. Steel	2
8A	Spring Washer	S. Steel	2
9*	Stem Seal	TFM	1
10	Follower	S. Steel	1

Item	Description	Material specifications	Qty.
10A*	Slide Bearing	S. Steel	1
12	Stem Nut	S. Steel	1
13	Locking Clip	S. Steel	1
14	Handle	S. Steel	1
14A	Stop Plate	S. Steel	1
14B	Wrench Head	S. Steel	1
16	Wrench Bolt	S. Steel	1
17	Sleeve	PVC	1
18	Body Bolts	S. Steel	16
24*	Bonnet Inner Seal	Acc. Ordering Code	1
24A*	Bonnet Outer Seal	Acc. Ordering Code	1
25*	Stem Bearing	PTFE	1
26	Bonnet	S. Steel	1
28	Bolt	S. Steel	4


* Maintenance kit components

Cryogenic Multiport Floating Ball

Valve Dimensions

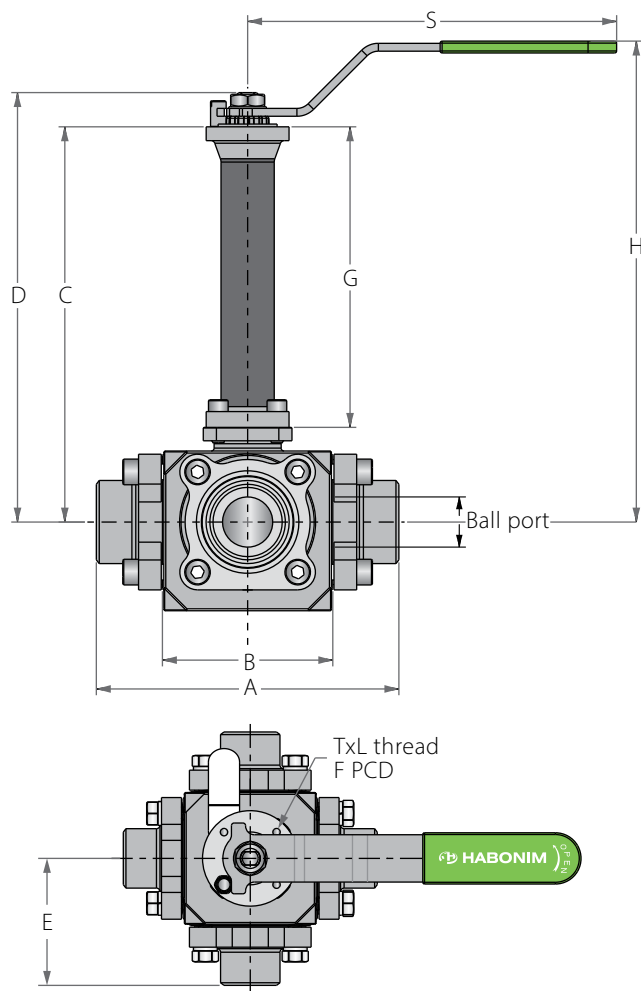

Preparation for actuation

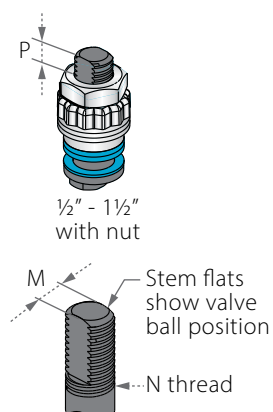


Valve Face To Face sizes are according to Habonim catalog data only, for Extended-weld/Flanged/Tri-clamp end see Face To Face sizes page.

Std. port	Full port	Unit	Ball port	A	B	Standard design				6" bonnet				E	S	M	N	P	TxL	F	PCD	Weight kg/lb	
						C	D	H	G	C	D	H	G									Std.	6"
DN20	DN15	mm	14.3	113.0	67.0	342.1	359.6	384.0	304.0	190.5	208.0	232.0	152.0	A/2	187.0	7.54	¾" UNF	5.8	M5X8	F04	42	3.8	3.3
¾"	½"	inch	0.56	4.45	2.64	13.47	14.16	15.12	11.97	7.50	8.19	9.15	6.0		7.36	0.30		0.23			1.65	8.36	7.26
DN25	DN20	mm	20.6	143.6	81.6	347.0	364.5	389.0	304.0	195.4	212.9	237.0	152.0		187	7.54	¾" UNF	5.8	M5X8	F04	42	5.3	4.8
1"	¾"	inch	0.81	5.65	3.21	13.66	14.35	15.31	11.97	7.69	8.38	9.34	6.0		7.36	0.30		0.23			1.65	11.66	10.56
DN32	DN25	mm	25.4	153.4	86.4	352.0	369.5	394.0	304.0	200.4	217.9	242.0	152.0		187.0	7.54	¾" UNF	5.8	M5X8	F04	42.0	7.0	6.5
1¼"	1"	inch	1.0	6.04	3.40	13.86	14.55	15.51	11.97	7.89	8.58	9.54	6.0		7.36	0.30		0.23			1.65	15.4	14.3
DN40	DN32	mm	31.8	164.0	97.0	353.4	382.9	407.0	304.0	201.8	231.3	255.0	152.0		237.0	8.71	¾" UNF	7.8	M6X9	F05	50.0	9.0	8.5
1½"	1¼"	inch	1.25	6.46	3.82	13.91	15.07	16.02	11.97	7.94	9.11	10.06	6.0		9.33	0.34		0.31			1.97	19.8	18.7



Cryogenic Multiport Floating Ball

Components & Materials

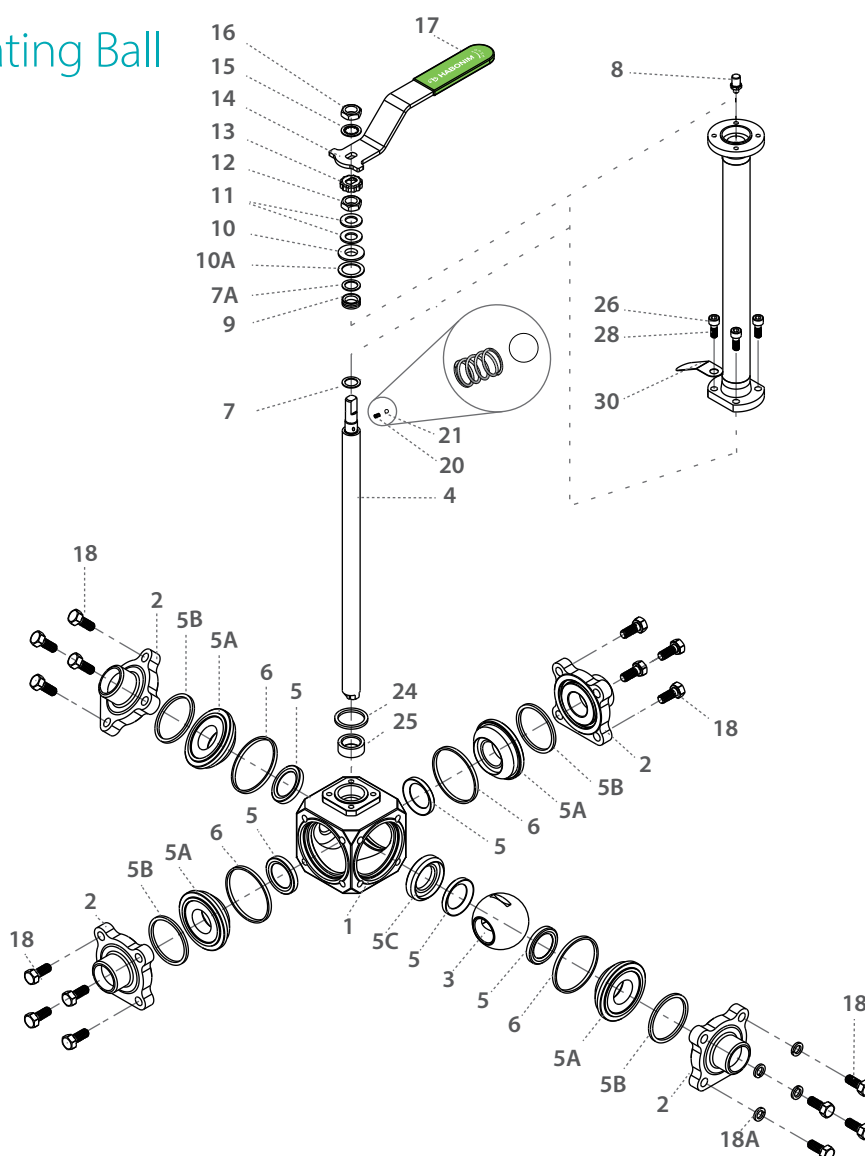


Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	End	Acc. Ordering Code	3/4**
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	4/5**
5A	Seat Housing	S. Steel	3/4**
5B*	Seat Seal	PTFE, Graphite	3/4**
5C	Seat Support	A479 316/316L, B574 N06022, Bronze RG5	1
6*	Body Seal	PTFE, Graphite	3/4**
7*	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
8	Stop Pin	S. Steel	1
9*	Stem Seal	TFM	1
10	Follower	S. Steel	1
10A*	Slide Bearing	S. Steel	1
11	Disc Spring	S. Steel	2

Item	Description	Material specifications	Qty.
12	Stem Nut	S. Steel	1
13	Locking Clip	S. Steel	1
14	Handle	S. Steel	1
15	Serrated Washer	S. Steel	1
16	Handle Nut	S. Steel	1
17	Sleeve	PVC	1
18	Body Bolt	S. Steel	16
20	Anti-Static Spring	S. Steel	1
21	Anti-Static Plunger	S. Steel	1
23	Tag (not shown)	S. Steel	1
24*	Bonnet Seal	PTFE, Graphite	1
25*	Stem Bearing	PTFE	1
26	Bonnet	S. Steel	1
28	Bolt	S. Steel	4
30	Dog Tag	S. Steel	1



* Maintenance kit components

Cryogenic Floating Ball Multiport

Valve Dimensions

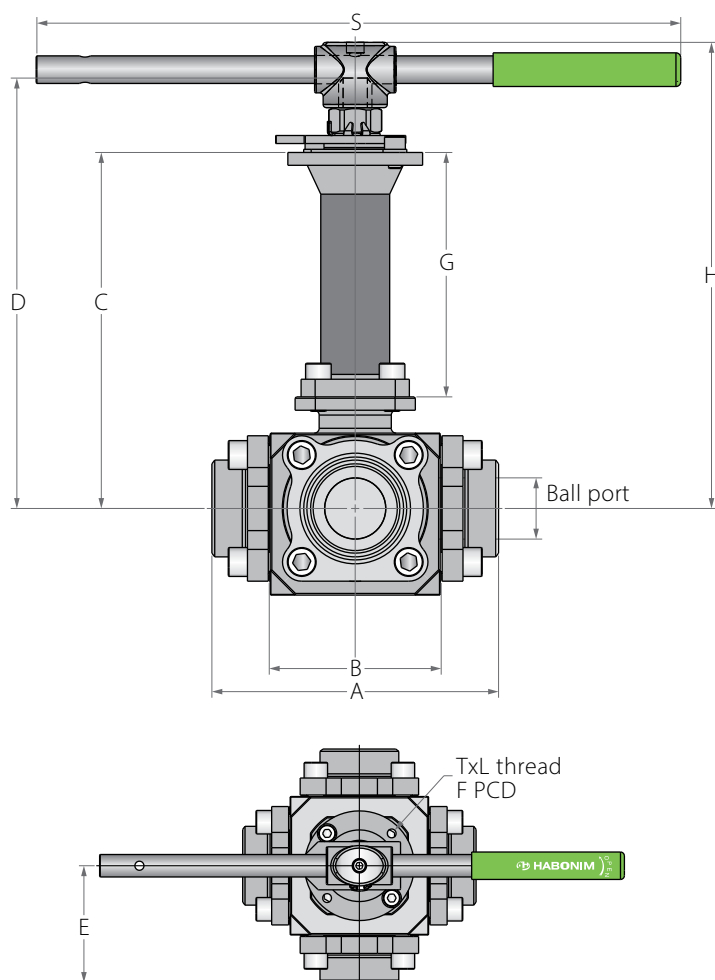

Preparation for actuation




Valve Face To Face sizes are according to Habonim catalog data only, for Extended-weld/Flanged/Tri-clamp end see Face To Face sizes page.

Std. port	Full port	Unit	Ball port	A	B	Standard design				6" bonnet				E	S	M	N	P	TxL	F	PCD	Weight kg/lb	
						C	D	H	G	C	D	H	G									Std.	6"
DN50	DN40	mm	38.1	177.2	107.2	396.7	438.3	465.0	327.0	187.4	187.4	256.0	152.0	A/2	400.0	13.9	M20x2.5	13.5	M8X10	F07	70.0	16.0	14.5
2"	1½"	inch	1.50	6.98	4.22	15.62	17.26	18.32	12.87	7.38	7.38	10.08	6.0		15.75	0.55		0.53			2.76	35.2	31.9
DN65	DN50	mm	48.0	210.4	125.0	406.1	447.7	475.0	327.0	195.1	195.1	264.0	152.0		400.0	13.9	M20x2.5	13.5	M8X10	F07	70.0	22.5	21.0
2½"	2"	inch	1.89	8.28	4.92	15.99	17.63	18.69	12.87	7.68	7.68	10.38	6.0		15.75	0.55		0.53			2.76	49.5	46.2



Cryogenic Floating Ball Multiport

Components & Materials

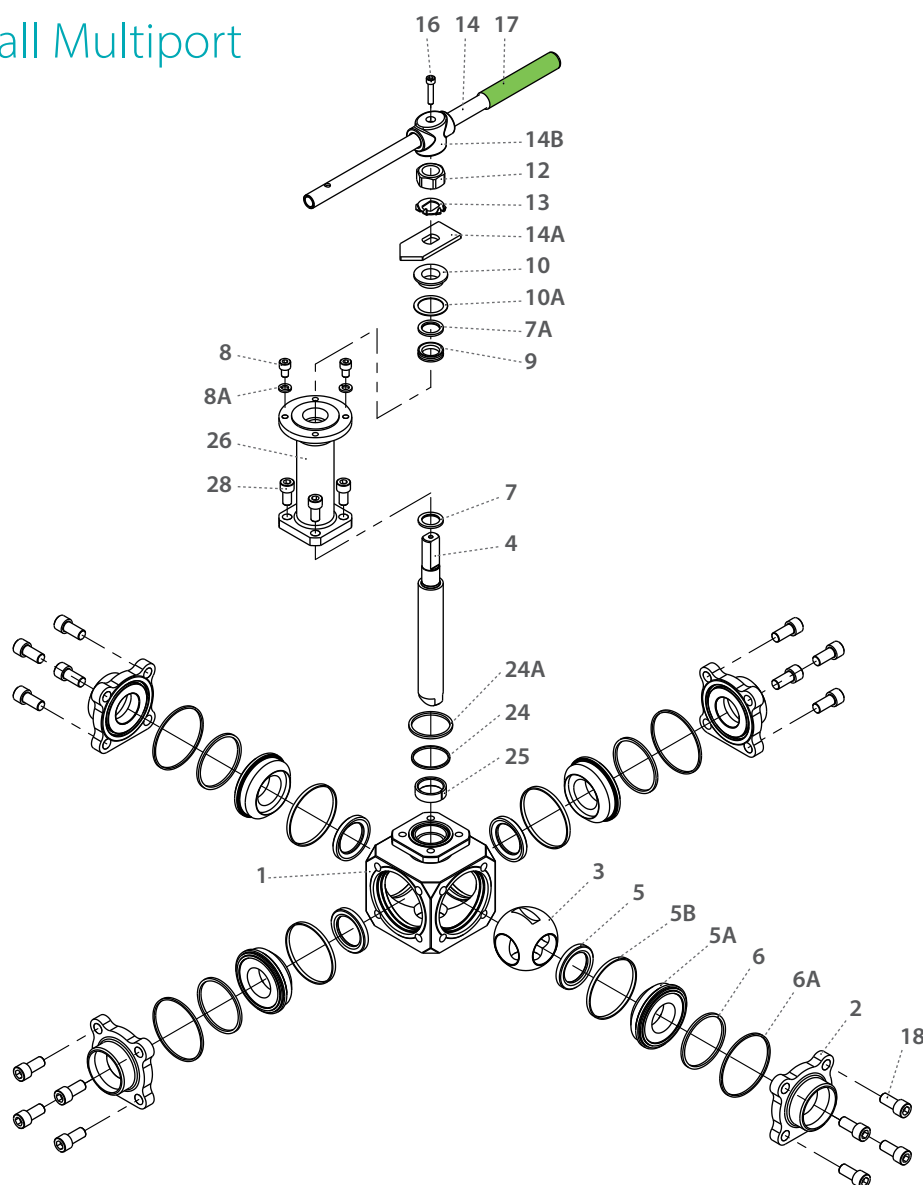

Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	End	Acc. Ordering Code	3
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	4
5A	Seat Housing	S. Steel	3
5B*	Seat Seal	PTFE, Graphite	3
5C	Seat Support	A479 316/316L, B574 N06022, Bronze RG5	1
6*	Body Seal	PTFE, Graphite	3
7*	Stem Thrust Seal	PCTFE	1
7a*	Anti-Abrasion Ring	PCTFE	1
8	Stop Pin	S. Steel	1
9*	Stem Seal	TFM	1
10	Follower	S. Steel	1
10A*	Slide Bearing	S. Steel	1
11	Disc Spring	S. Steel	2



Item	Description	Material specifications	Qty.
12	Stem Nut	S. Steel	1
13	Tab Lock Washer	S. Steel	1
14**	Handle	S. Steel	1
14A	Stop Plate	S. Steel	1
14B	Wrench Head	S. Steel	1
16	Wrench Bolt	S. Steel	1
17	Sleeve	PVC	1
18	Body Bolt	S. Steel	16
18A	Spring Washer	S. Steel	16
20	Anti-Static Spring	S. Steel	2
21	Anti-Static Plunger	S. Steel	2
23	Tag (not shown)	S. Steel	1
24*	Bonnet Seal	PTFE, Graphite	1
25*	Stem Bearing	PTFE	1
26	Bonnet	S. Steel	1
28	Bolt	S. Steel	4
30	Dog Tag	S. Steel	1

* Maintenance kit components



** Gear operator should be used for size 3" DN80 and above
(handle components are not included)

Cryogenic Floating Ball Multiport

Valve Dimensions

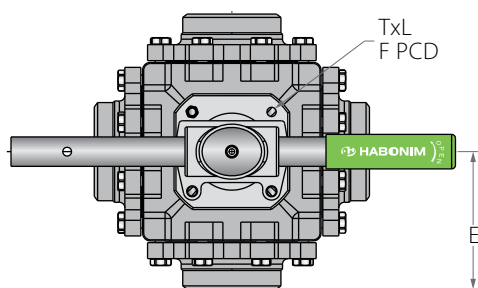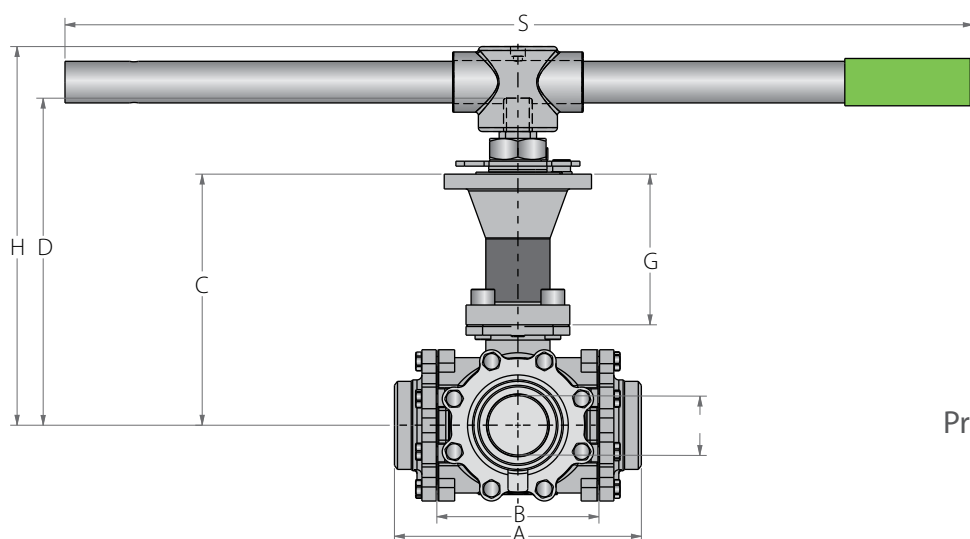

Preparation for actuation




Valve Face To Face sizes are according to Habonim catalog data only, for Extended-weld/Flanged/Tri-clamp end see Face To Face sizes page.

Std. port	Full port	Unit	Ball port	A	B	Standard design				6" bonnet				E	S	M	MDD	N	P	F	TxL	Weight kg/lb		
						C	D	H	G	C	D	H	G									Std.	6"	
DN80	DN65	mm	60.0	249.8	164.0	486.75	555.85	624.65	254.15	244.43	323.25	274.5	152.4	124.9	916.0	28.45	23.75	1½"-12 UNF-2A	26.2	F12	125.0	M12X15	42.4	41.2
3"	2½"	inch	2.36	9.83	6.46	19.16	21.88	24.59	10.01	9.62	12.73	10.8	6.0	4.91	36.0	1.12	0.94		1.03		4.92			93.45
DN100	DN80	mm	76.0	309.8	205.0	519.5	588.6	624.65	286.9	257.13	356.0	274.5	152.4	154.9	916.0	28.45	23.75	1½"-12 UNF-2A	26.2	F12	125.0	M12X15	66.4	65.2
4"	3"	inch	2.99	12.2	8.07	20.45	23.17	24.59	11.3	10.12	14.02	10.8	6.0	11.1	36.0	1.12	0.94		1.03		4.92			146.35



Cryogenic Floating Ball Multiport

Components & Materials

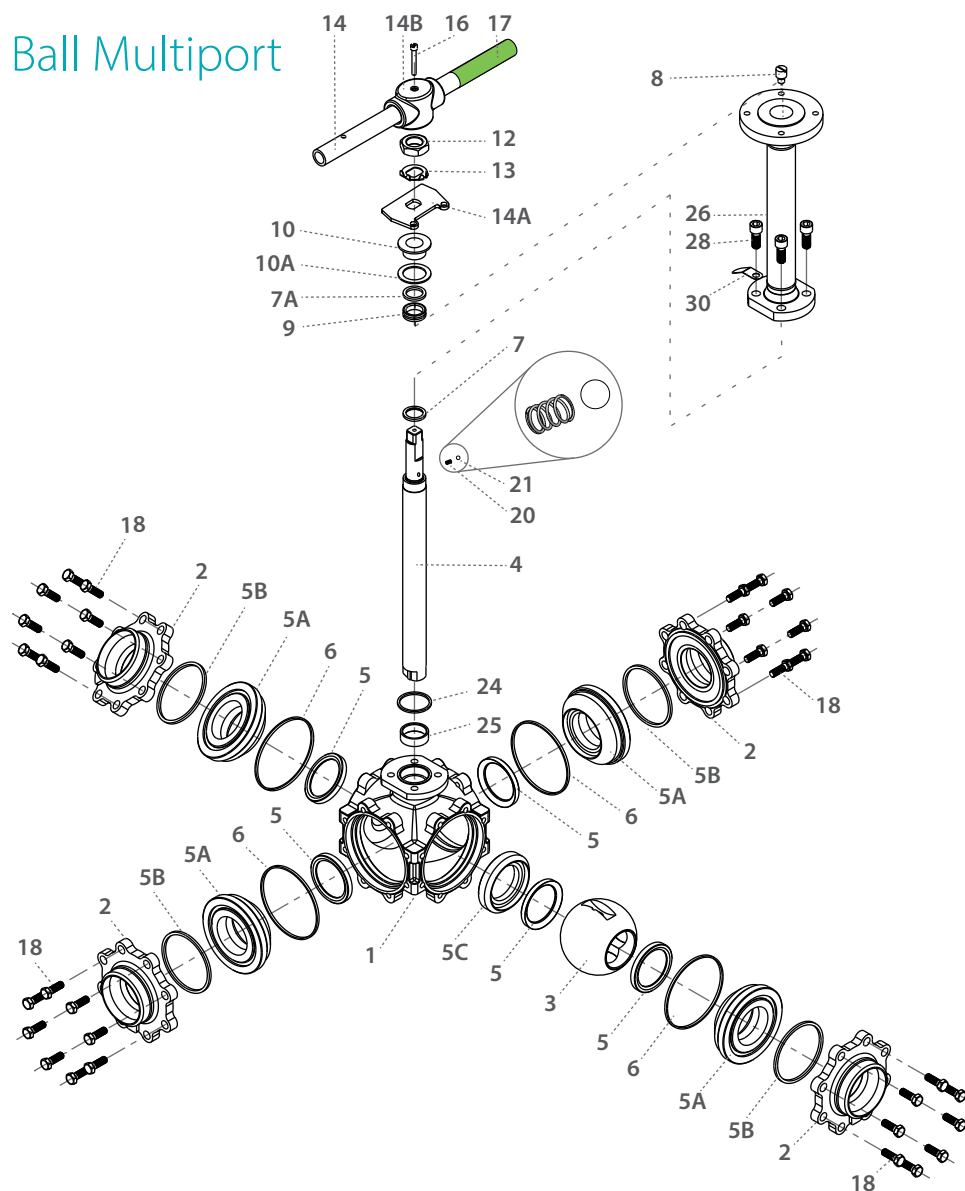

Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	End	Acc. Ordering Code	3
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	4
5A	Seat Housing	S. Steel	3
5B*	Seat Seal	PTFE, Graphite	3
5C	Seat Support	A479 316/316L, B574 N06022, Bronze RG5	1
6*	Body Seal	PTFE, Graphite	3
7*	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
8	Stop Pin	S. Steel	1
9*	Stem Seal	TFM	1
10	Follower	S. Steel	1
10A*	Slide Bearing	S. Steel	1
11	Disc Spring	S. Steel	2


Item	Description	Material specifications	Qty.
12	Stem Nut	S. Steel	1
13	Tab Lock Washer	S. Steel	1
14**	Handle	S. Steel	1
14A	Stop Plate	S. Steel	1
14B	Wrench Head	S. Steel	1
16	Wrench Bolt	S. Steel	1
17	Sleeve	PVC	1
18	Body Bolt	S. Steel	32
18A	Spring Washer	S. Steel	32
20	Anti-Static Spring	S. Steel	2
21	Anti-Static Plunger	S. Steel	2
23	Tag (not shown)	S. Steel	1
24*	Bonnet Seal	PTFE, Graphite	1
25*	Stem Bearing	PTFE	1
26	Bonnet	S. Steel	1
28	Bolt	S. Steel	4
30	Dog Tag	S. Steel	1

* Maintenance kit components


** Gear operator should be used for size 4" DN100
(handle components are not included)

Cryogenic Multiport Floating Ball

Valve Dimensions

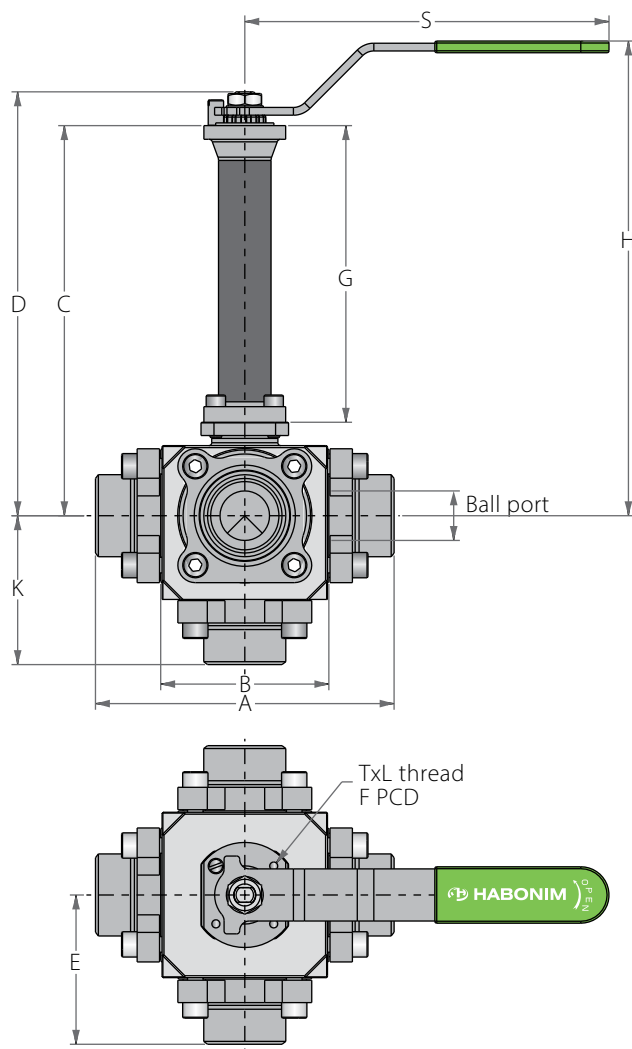

Preparation for actuation

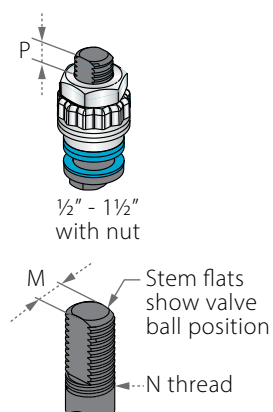


Valve Face To Face sizes are according to Habonim catalog data only, for Extended-weld/Flanged/Tri-clamp end see Face To Face sizes page.

Std. port	Full port	Unit	Ball port	A	B	Standard design				6" bonnet				E	K	S	M	N	P	TxL	F	PCD	Weight kg/lb	
						C	D	H	G	C	D	H	G										Std.	6"
DN20	DN15	mm	14.3	113.0	67.0	342.1	359.6	384.0	304.0	190.5	208.0	232.0	152.0	A/2	52.7	187	7.54	¾" UNF	5.8	M5X8	F04	42.0	3.8	3.3
¾"	½"	inch	0.56	4.45	2.64	13.47	14.16	15.12	11.97	7.50	8.19	9.15	6.0		2.07	7.36	0.30		0.23			1.65	8.36	7.26
DN25	DN20	mm	20.6	143.6	81.6	347.0	364.5	389	304	195.4	212.9	237.0	152		66.2	187	7.54	¾" UNF	5.8	M5X8	F04	42.0	5.3	4.8
1"	¾"	inch	0.81	5.65	3.21	13.66	14.35	15.31	11.97	7.69	8.38	9.34	6.0		2.61	7.36	0.30		0.23			1.65	11.66	10.56
DN32	DN25	mm	25.4	153.4	86.4	352.0	369.5	394.0	304.0	200.4	217.9	242.0	152		76.5	187	7.54	¾" UNF	5.8	M5X8	F04	42.0	7.0	6.5
1¼"	1"	inch	1.0	6.04	3.40	13.86	14.55	15.51	11.97	7.89	8.58	9.54	6.0		3.01	7.36	0.30		0.23			1.65	15.4	14.3
DN40	DN32	mm	31.8	164	97.0	353.4	382.9	407.0	304.0	201.8	231.3	255.0	152		79.5	237.0	8.71	¾" UNF	7.8	M6X9	F05	50.0	9.0	8.5
1½"	1¼"	inch	1.25	6.46	3.82	13.91	15.07	16.02	11.97	7.94	9.11	10.06	6.0		3.13	9.33	0.34		0.31			1.97	19.8	18.7



Cryogenic Multiport Floating Ball

Components & Materials

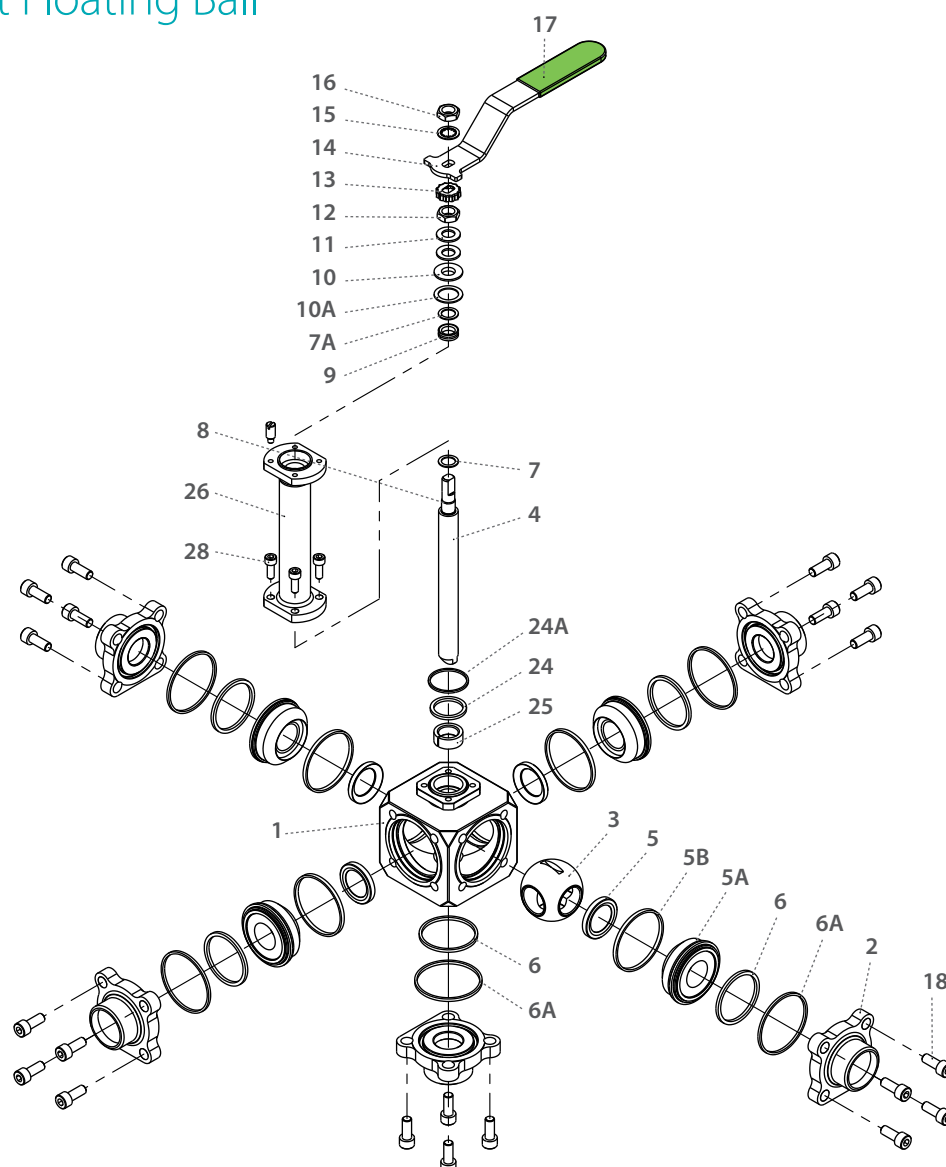


Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	Ends	Acc. Ordering Code	5
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	4
5A	Support Seat	Acc. Ordering Code	4
5B*	Seat Seal	Acc. Ordering Code	4
6*	Inner seal	Acc. Ordering Code	5
6A*	Outer Seal	Acc. Ordering Code	5
7*	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
8	Stop Pin	S. Steel	1
9*	Stem Seal	TFM	1
10	Follower	S. Steel	1

Item	Description	Material specifications	Qty.
10A*	Slide Bearing	S. Steel	1
11	Disc Spring	S. Steel	2
12	Stem Nut	S. Steel	1
13	Locking Clip	S. Steel	1
14	Handle	S. Steel	1
15	Serrated Washer	S. Steel	1
16	Handle Nut	S. Steel	1
17	Sleeve	PVC	1
18	Body Bolts	S. Steel	20
24*	Bonnet Inner Seal	Acc. Ordering Code	1
24A*	Bonnet Outer Seal	Acc. Ordering Code	1
25	Stem Bearing	PTFE	1
26	Bonnet	S. Steel	1
28	Bolt	S. Steel	4



* Maintenance kit components

Cryogenic Floating Ball Multiport

Valve Dimensions

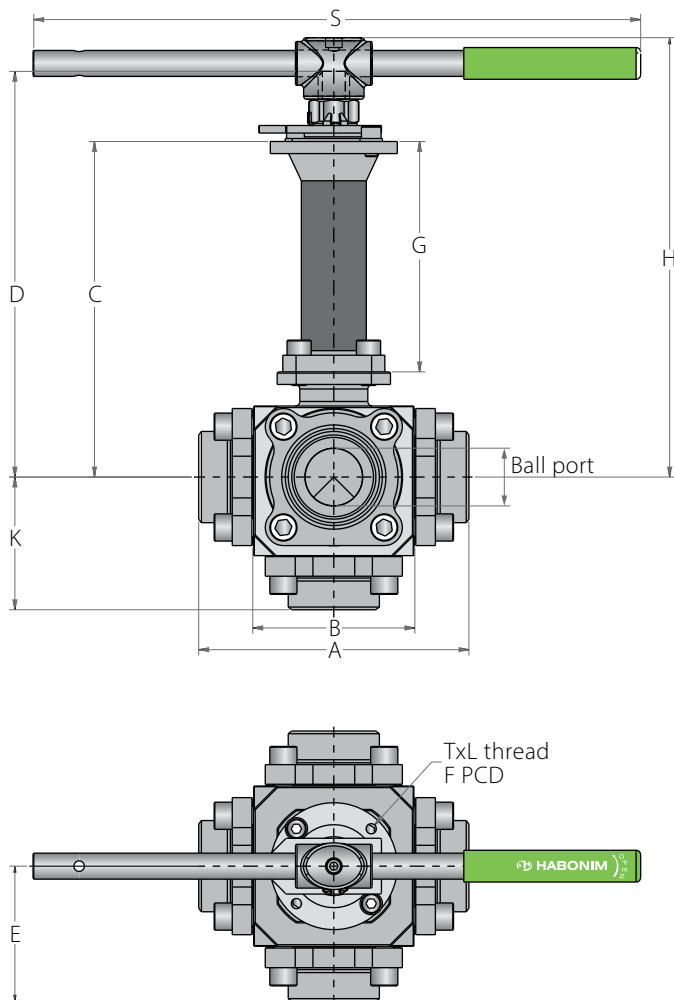

Preparation for actuation




Valve Face To Face sizes are according to Habonim catalog data only, for Extended-weld/Flanged/Tri-clamp end see Face To Face sizes page.

Std. port	Full port	Unit	Ball port	A	B	Standard design				6" bonnet				E	K	S	M	N	P	TxL	F	PCD	Weight kg/lb	
						C	D	H	G	C	D	H	G										Std.	6"
DN50	DN40	mm	38.1	177.2	107.2	396.7	438.3	465.0	327.0	187.4	187.4	256.0	152.0	A/2	87.0	400.0	13.9	M20x2.5	13.5	M8X10	F07	70.0	16.0	14.5
2"	1½"	inch	1.50	6.98	4.22	15.62	17.26	18.32	12.87	7.38	7.38	10.08	6.0		3.43	15.75	0.55	M20x2.5	0.53	M8X10	F07	2.76	35.2	31.9
DN65	DN50	mm	48.0	210.4	125	406.1	447.7	475.0	327.0	195.1	195.1	264.0	152.0	A/2	100.7	400.0	13.9	M20x2.5	13.5	M8X10	F07	70.0	22.5	21.0
2½"	2"	inch	1.89	8.28	4.92	15.99	17.63	18.69	12.87	7.68	7.68	10.38	6.0		3.96	15.75	0.55	M20x2.5	0.53	M8X10	F07	2.76	49.5	46.2



Cryogenic Floating Ball Multiport

Components & Materials

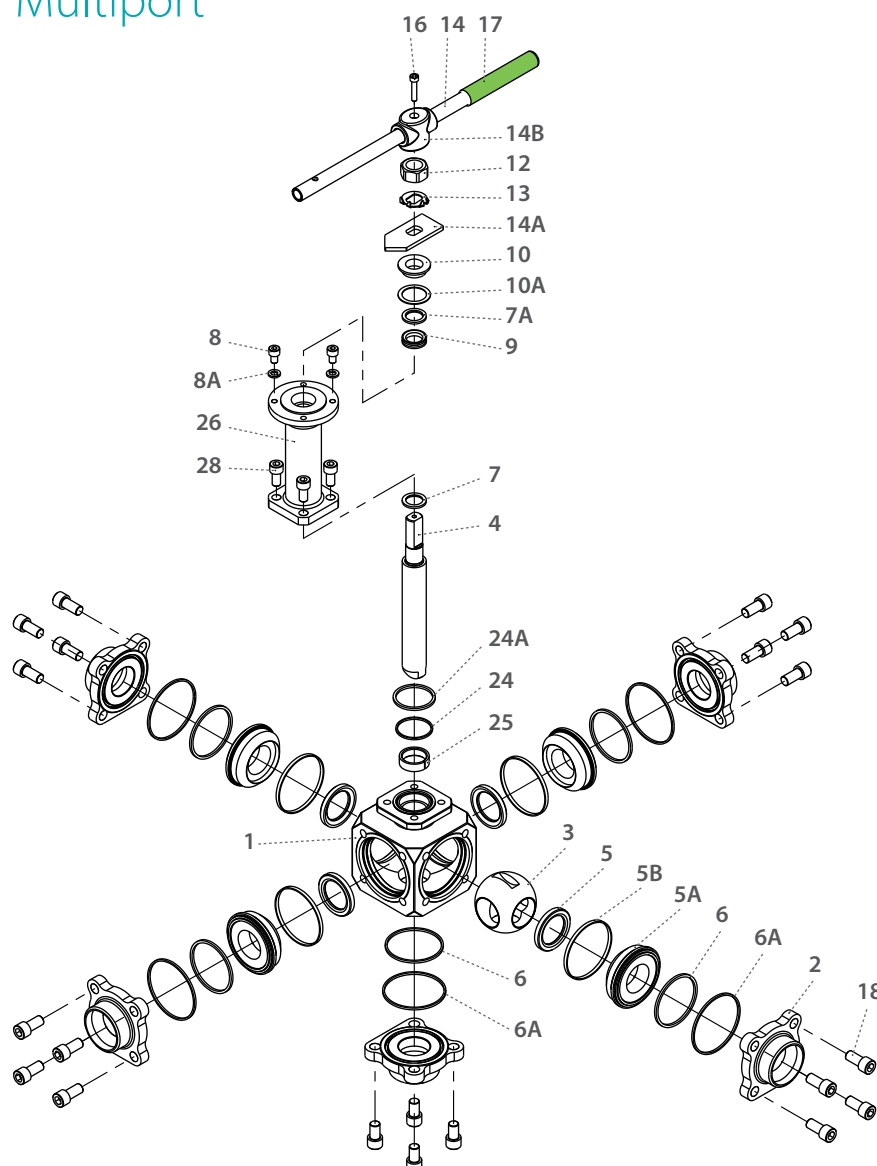

Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	Ends	Acc. Ordering Code	5
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	4
5A	Support Seat	Acc. Ordering Code	4
5B*	Seat Seal	Acc. Ordering Code	4
6*	Inner Seal	Acc. Ordering Code	5
6A*	Outer Seal	Acc. Ordering Code	5
7*	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
8	Stop Pin	S. Steel	2
8A	Spring Washer	S. Steel	2
9	Stem Seal	TFM	1
10	Follower	S. Steel	1
10A*	Slide Bearing	S. Steel	1
11	Disc Spring	S. Steel	2

Item	Description	Material specifications	Qty.
12	Stem Nut	S. Steel	1
13	Locking Clip	S. Steel	1
14	Handle	S. Steel	1
14A	Stop Plate	S. Steel	1
14B	Wrench Head	S. Steel	1
16	Wrench Bolt	S. Steel	1
17	Sleeve	PVC	1
18	Body Bolts	S. Steel	20
18A	Spring Washer	S. Steel	20
20	Anti-Static Spring	S. Steel	2
21	Anti-Static Plunger	S. Steel	2
23	Tag (not shown)	S. Steel	1
24*	Bonnet Inner Seal	Acc. Ordering Code	1
24A*	Bonnet Outer Seal	Acc. Ordering Code	1
25*	Stem Bearing	PTFE	1
26	Bonnet	S. Steel	1
28	Bolt	S. Steel	4

C61

C62


DC61

DC62


Face To Face Sizes

Valve Size	B		A-XBW / ETI / ETD / GR		A-ETO	A-Flanged CLASS 150+300		A-Flanged CLASS 600		A-Flanged DIN		A-TC
	Std. port	Full port	Std. port	Full port	Std. port	Std. port	Full port	Std. port	Full port	Std. port	Full port	Full port
DN15		67.0		189.4			182.4		194.4		172.4	
½"		2.64		7.46			7.18		7.65		6.79	
DN20	67.0	81.6	189.4	218.6	189.4	194.4	202.2	194.4	215.0	192.4	200.0	144.0
¾"	2.64	3.21	7.46	8.61	7.46	7.65	7.96	7.65	8.46	7.57	7.87	5.67
DN25	81.6	86.4	218.6	224.4	213.9	214.8	210.2	265.8	223.1	209.8	205.2	164.2
1"	3.21	3.40	8.61	8.83	8.42	8.46	8.28	10.46	8.78	8.26	8.08	6.46
DN32	86.4	97.0	224.4	238.0	224.4	223.1	226.6	223.1	226.6	225.2	228.6	86.4
1¼"	3.40	3.82	8.83	9.37	8.83	8.78	8.92	8.78	8.92	8.87	9.0	3.40
DN40	97.0	107.2	238.0	251.2	232.6	238.6	241.4	290.0	267.0	248.6	251.0	188.4
1½"	3.82	4.22	9.37	9.89	9.16	9.39	9.50	11.42	10.51	9.79	9.88	7.42
DN50	107.2	125.0	251.2	285.0	244.4	266.9	268.2			280.8	282.4	209.8
2"	4.22	4.92	9.89	11.22	9.62	10.51	10.56			11.06	11.12	8.26
DN65	125.0	164.0	285.0	364.0	285.0	293.4	362.6			284.7	350.6	265.4
2½"	4.92	6.46	11.22	14.33	11.22	11.55	14.28			11.21	13.80	10.45
DN80	164.0	205	364.0	445.0	364.0	362.7	378.4			360.6	406.2	164.0
3"	6.46	8.07	14.33	17.52	14.33	14.28	14.90			14.20	15.99	6.46
DN100	205.0		445.0		445.0	401.0				446.2		205.0
4"	8.07		17.52		17.52	15.79				17.57		8.07





XBW / ETO / ETI / ETD / GR

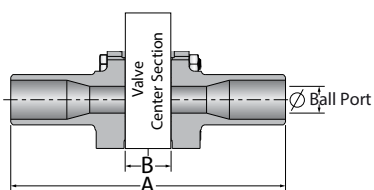

Flanged

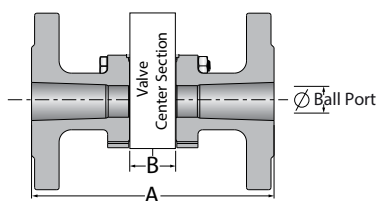

TC

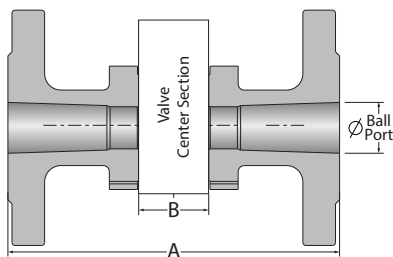

C61

C62

DC61

DC62



Cryogenic Floating Ball Multiport - Ordering Code System

"Mandatory option" options are marked with **green background** | "Standard offer" options are marked with **light green background**

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	...30
2	0		F	D	C	6	1	W	-	6	6	6	M	A	A		/	B	W			-	#	0	0	1	-	
Size		Features			Series ⁽¹⁾		Design		Body material	Ends material	Ball material	Stem material	Seat material	Body/seat seal			End connection				Flow pattern			Special Features				

Size (1-2)		
Code	inch	mm
05 *	½"	15
07	¾"	20
10	1"	25
12	1¼"	32
15	1½"	40
20	2"	50
25	2½"	65
30**	3"	80
40**	4"	100

* Full port only

** Available in C61, C62 only

Features (3-6)	
C	Cryogenic design
D	Diverter bottom entry
F	Fire safe
B	Full port

Series (7-8)	
61	3 way Multiport Floating ball
62	4 way Multiport Floating ball

Design (9)	
W *	Total HermetiX Integrity Package
X**	HermetiX stem seal

* Up to 2½"/2" full bore

** 3" to 4"

Body material (11)	
6	S. Steel

End material (12)	
6	S. Steel

Ball material (13)	
6	S. Steel

Stem material (14)	
M	High Strength S. Steel
Z	Inconel

Seat material (15)	
A	TFM
C	PCTFE
P	CF PTFE

Inner Seal Material (16)	
A	TFM
G	Expanded graphite

Outer Seal Material (17)	
A	TFM
G	Expanded graphite

Flow pattern code (23-26)	
#001-#028	3 way side entry
#029-#031	3 way bottom entry
#032-#063	4 way bottom entry
#064-#073	4 way side entry
#074-#085	5 way bottom entry

Special Features (24-30)	
6.0	Short bonnet

End connections	
Welded	
BW10	Buttweld schd. 10
BW	Buttweld schd. 40
XBW10	Extended buttweld schd. 10
XBW	Extended buttweld schd. 40
BW5	Buttweld schd. 5
BW80	Buttweld schd. 80
BWO *	Buttweld tube OD
BWD	Buttweld DIN 11860
BWI1.6	buttweld ISO 1127 1.6mm
BWI2.0	buttweld ISO 1127 2.0mm
BWI2.3	buttweld ISO 1127 2.3mm
SW	Socket weld
SWO *	Socket weld tube OD
XBW80	Extended buttweld 80
XSW	Extended socket weld
ETO *	Extended tube OD
ETI1.6	Extended buttweld ISO 1127 1.6mm
ETI2.0	Extended buttweld ISO 1127 2.0mm
ETI2.3	Extended buttweld ISO 1127 2.3mm
ETD	Extended buttweld DIN 11850

* Std. port only


Threaded	
NPT	ASME B1.20.1 - National Pipe Taper thread
MNPT	Male NPT
BSPT	EN 10226 - Pipe Taper thread
MBSPT	Male BSPT
BSPP	ISO228-1, DIN3852 - Pipe parallel thread
DIN3852	DIN3852 - Pipe Parallel thread
AS5202	SAE internal straight thread

Flanged	
150	ASME B16.5 #150 RF
300	ASME B16.5 #300 RF
600	ASME B16.5 #600 RF
900	ASME B16.5 #900 RF
PN16	EN1092 PN16 RF
PN40	EN1092 PN40 RF
PN63	EN1092 PN63 RF
PN100	EN1092 PN100 RF
PN160	EN1092 PN160 RF

Clamp	
LL *	Compression fitting (Imperial) - No nuts & Ferrules
LM *	Compression fitting (metric) - No nuts & Ferrules
LL-NF *	Compression fitting (Imperial) - with nuts & Ferrules
LM-NF *	Compression fitting (metric) - with nuts & Ferrules
TC *	Tri-Clamp
GR**	Grayloc® compatible hub (Grayloc® is a registered trademark of Grayloc Products, L.L.C.)

* Std. port only

** Not available for 1¼" (DN32) Valves

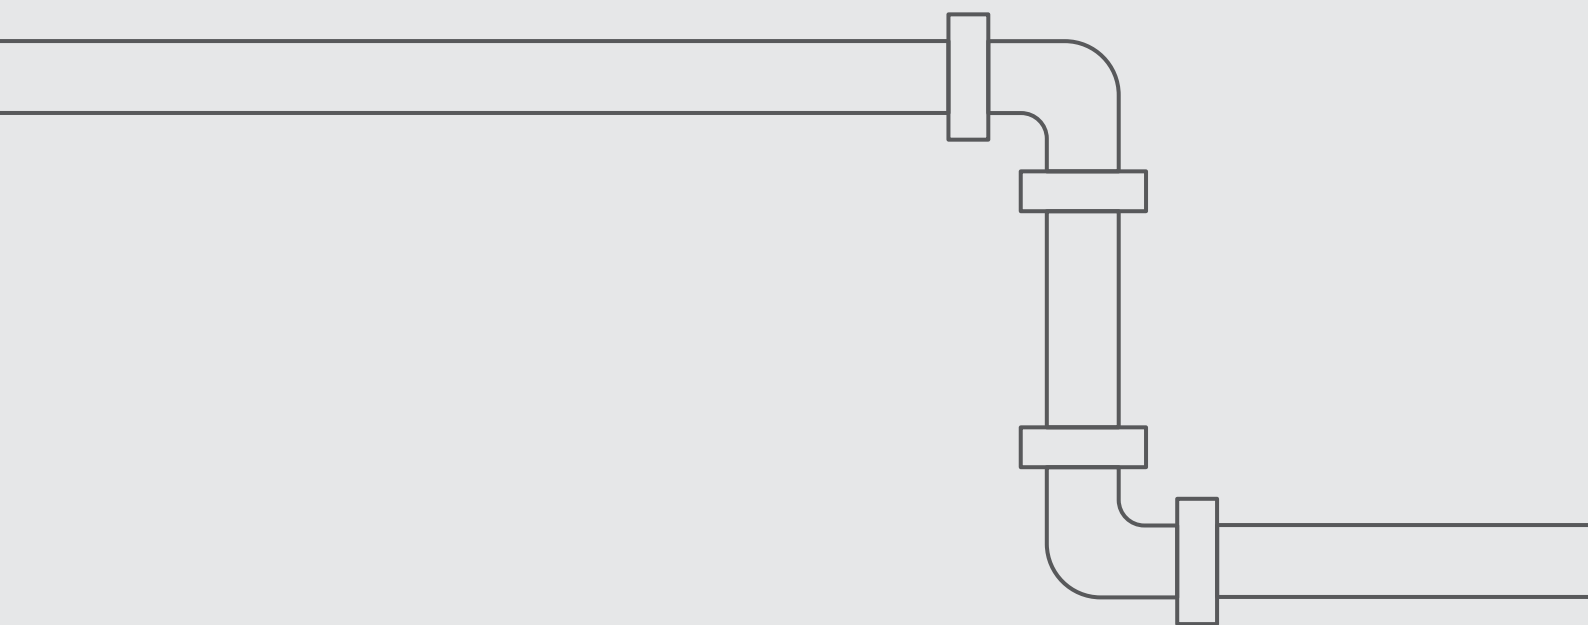

C31

C32

C73

C74

C77

C78



C31-BD

C32-BD

C73-BD


C74-BD

C77-BD

Cryogenic Valves

FLOATING BALL

FLANGED

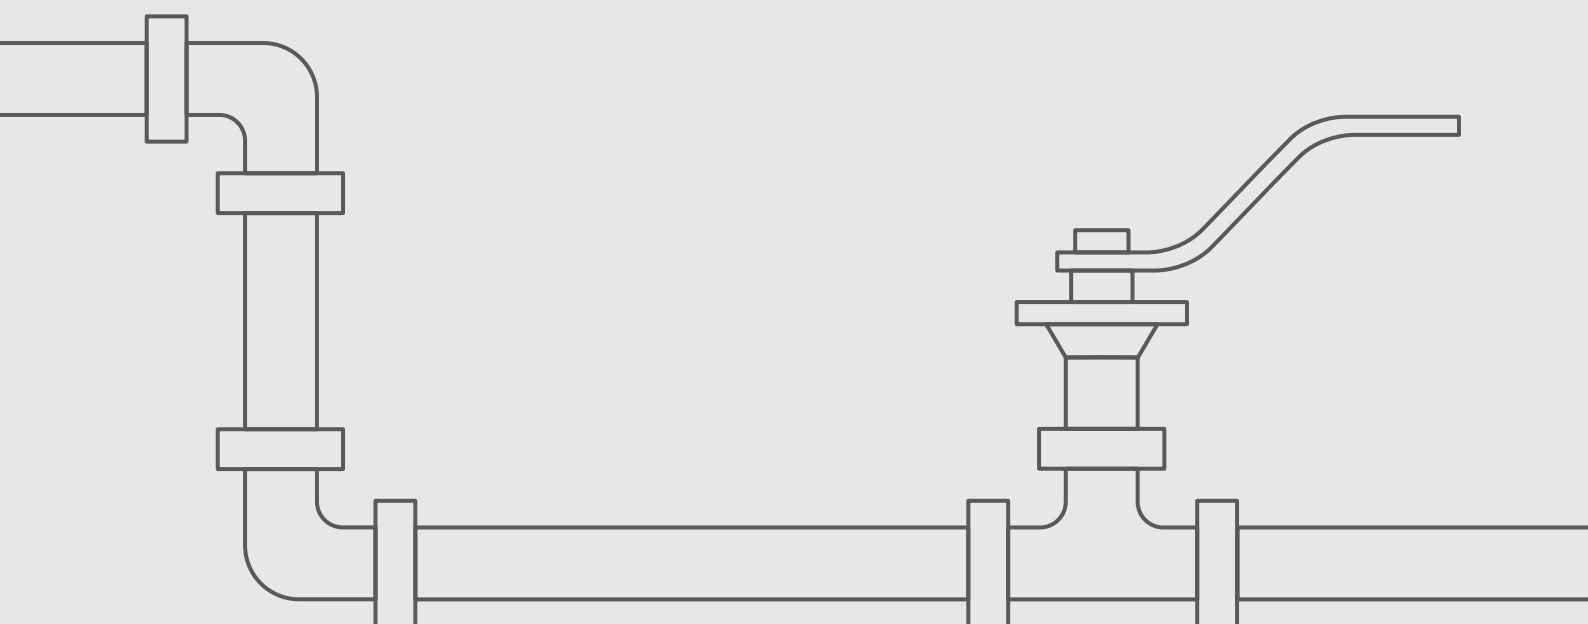


C31

C32


1/2"-2" | DN15-DN50 | CLASS 150/300

Cryogenic Flanged Reduced Port Floating Ball

Valve Dimensions

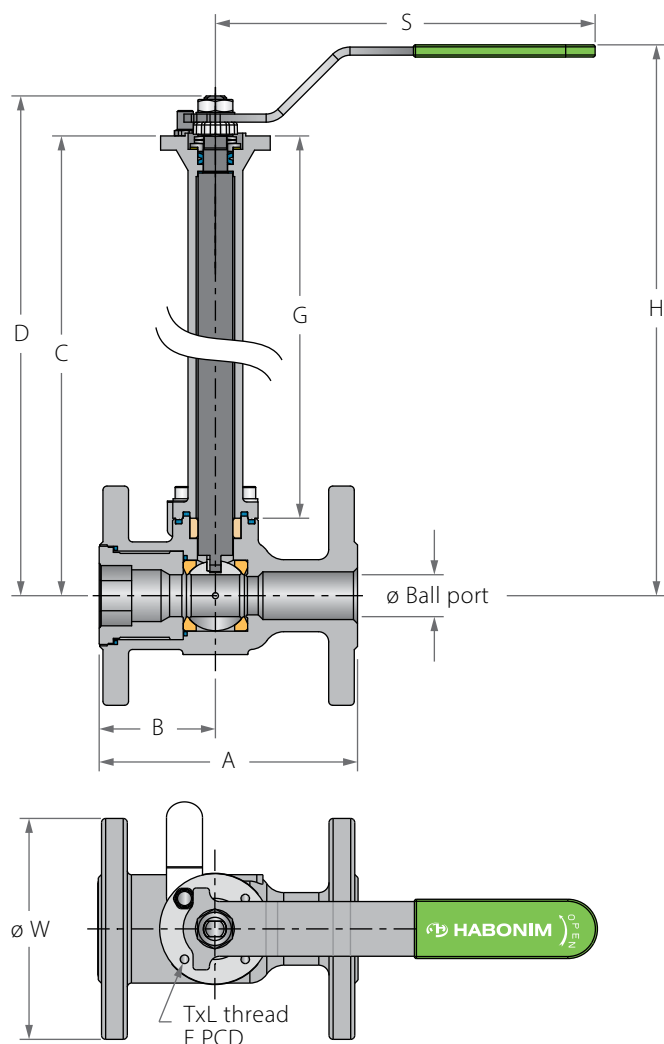

Preparation for actuation

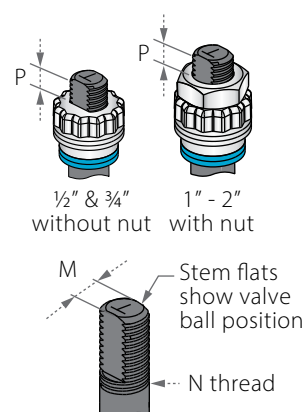


Std. port	Unit	Ball port	A 31	A 32	B	Standard design				6" bonnet				S	W	M	N	P	F	TxL	Weight kg/lb			Kv
						C	D	G	H	C	D	G	H								Std.	6"	Cv	
DN15	mm	11.15	108.0	140.0	46.0	333.0	341.9	304.0	367.0	181.4	190.3	152.4	215.4	150.0	89.0	5.5	3/8" UNF	7.2	36.0	M5X7	2.4	2.1	7	
1/2"	inch	0.44	4.25	5.51	1.81	13.11	13.46	11.97	14.45	7.14	7.49	6.0	8.48	5.91	3.5	0.22		0.28	F03	1.42	5.3	4.6	8	
DN20	mm	14.30	117.0	152.4	49.35	335.4	344.3	304.0	369.4	183.8	192.7	152.4	217.8	150.0	98.0	5.5	3/8" UNF	7.2	36.0	M5X7	3	2.7	10	
3/4"	inch	0.56	4.61	6.0	1.94	13.2	13.56	11.97	14.54	7.24	7.59	6.0	8.57	5.91	3.86	0.22		0.28	F03	1.42	6.6	5.9	12	
DN25	mm	20.60	127.0	165.0	57.0	342.15	359.65	304.0	387.0	190.55	208.05	152.4	235.4	187.0	108.0	7.54	7/16" UNF	7.2	42.0	M5X7	4.2	3.85	27	
1"	inch	0.81	5.0	6.5	2.24	13.47	14.16	11.97	15.24	7.5	8.19	6.0	9.27	7.36	4.25	0.3		0.28	F04	1.65	9.3	8.5	32	
DN40	mm	31.80	165.0	190.5	62.4	347.55	377.05	304.0	404.0	195.95	225.45	152.4	252.4	237.0	127.0	8.71	9/16" UNF	8.0	50.0	M6X8	7	6.43	70	
1 1/2"	inch	1.25	6.5	7.5	2.46	13.68	14.84	11.97	15.91	7.71	8.88	6.0	9.94	9.33	5.0	0.34		0.31	F05	1.97	15.4	14.2	82	
DN50	mm	38.10	178.0	216.0	68.0	352.25	381.75	304.0	406.0	200.65	230.15	152.4	254.4	237.0	152.0	8.71	5/8" UNF	8.5	50.0	M6X8	9.1	8.53	103	
2"	inch	1.50	7.01	8.5	2.68	13.87	15.03	11.97	15.98	7.9	9.06	6.0	10.02	9.33	5.98	0.34		0.33	F05	1.97	20.1	18.8	120	



Cryogenic Flanged Reduced Port Floating Ball

Components & Materials

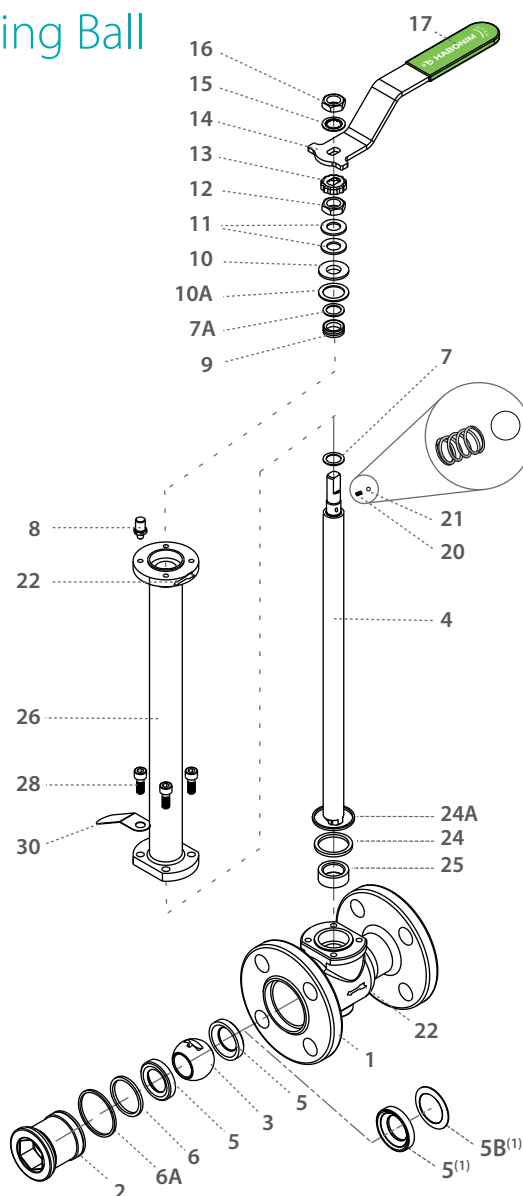

Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	Plug	Acc. Ordering Code	1
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	2
5B	Upstream Seat Spring	Inconel 718	1
6*	Inner Seal	TFM	1
6A*	Outer Seal	Acc. Ordering Code	1
7*	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
8	Stop Pin	S. Steel	1
9*	Stem Seal	TFM	1
10	Follower	S. Steel	1
10A*	Slide Bearing	S. Steel	1
11	Disc Spring	S. Steel	2
12	Stem Nut	S. Steel	1
13	Locking Clip	S. Steel	1

Item	Description	Material specifications	Qty.
14	Handle	S. Steel	1
15	Serrated Washer	S. Steel	1
16	Handle Nut	S. Steel	1
17	Sleeve	PVC	1
20	Anti-Static Spring	S. Steel	1
21	Anti-Static Plunger	S. Steel	1
22	Arrow Flow	S. Steel	2
23	Tag (not shown)	S. Steel	1
24*	Bonnet Inner Seal	TFM	1
24A*	Bonnet Outer Seal	Acc. Ordering Code	1
25*	Stem Bearing	PTFE	1
26	Bonnet	S. Steel	1
28	Bolt	S. Steel	4
30	Dog Tag	S. Steel	1

* Maintenance kit components

(1) Optional Dynamic seat design


C31

C32



3"-8" | DN80-DN200 | CLASS 150/300

Cryogenic Flanged Reduced Port Floating Ball

Valve Dimensions

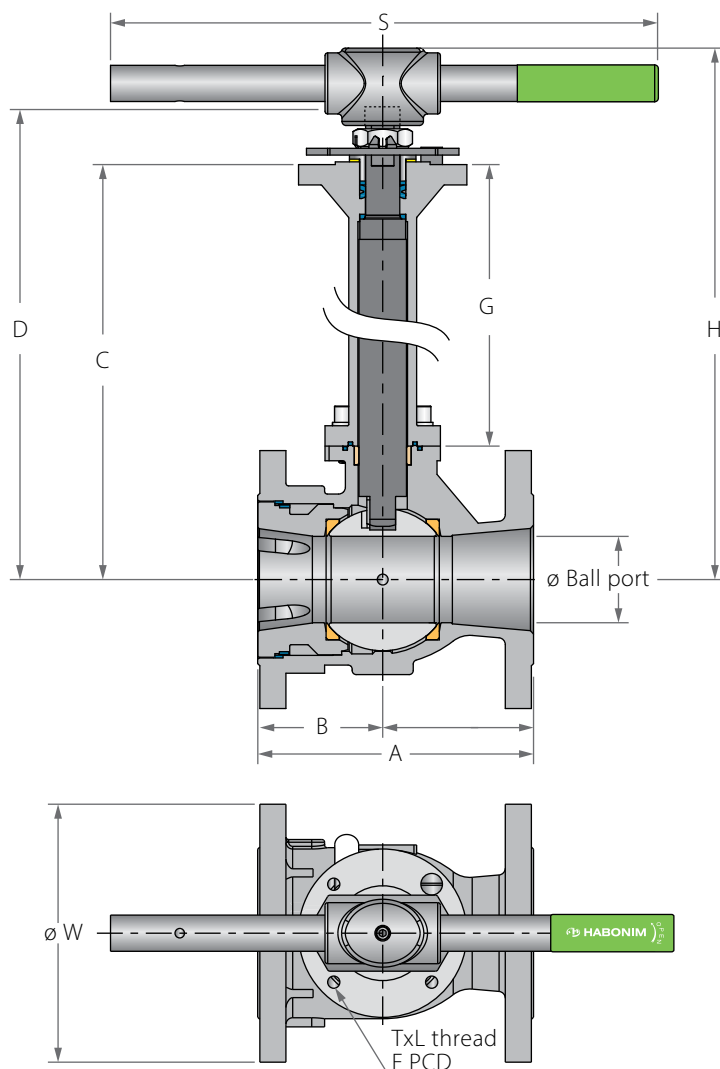

Preparation for actuation




Std. port	Unit	Ball port	A_31	A_32	B	Standard design				6" bonnet				S	W	M	MDD	N	P	F			TxL	Weight kg/lb		Kv
						C	D	G	H	C	D	G	H											Std.	6"	Cv
DN80	mm	63.8	203.2	282	92.1	463.3	509.9	343.5	550.5	272.2	318.8	152.4	359.4	610.0	210.0	18.92	15.9	1"-14	16.7	F10	102.0	M10X15	29	27.8	385	
3"	inch	2.51	8.0	11.1	3.63	18.24	20.07	13.52	21.67	10.72	12.55	6.0	14.15	24.02	8.27	0.74	0.63	UNS-2A	0.66		4.02		63.9	61.3	450	
DN100	mm	82.8	228.6	304.8	101.6	457.6	504.2	343.5	543.4	266.5	313.1	152.4	352.3	610.0	254	18.92	15.9	1"-14	16.7	F10	102.0	M10X15	44.6	43.4	615	
4"	inch	3.26	9.0	12.0	4.0	18.02	19.85	13.52	21.39	10.49	12.33	6.0	13.87	24.02	10.0	0.74	0.63	UNS-2A	0.66		4.02		98.3	95.7	720	
DN150	mm	111.3	266.8	403.2	107.8	561.0	630.5	385.0	-	328.4	397.9	152.4	-	-	318.0	28.45	23.75	1½"-12	26.2	F12	125.0	M12X15	92	89	872	
6"	inch	4.38	10.5	15.87	4.24	22.09	24.82	15.16	-	12.93	15.67	6.0	-	-	12.52	1.12	0.94	UNS-2A	1.03		4.92		202.4	195.8	1020	
DN200	mm	144.4	292.1	419.1	142.25	570.1	639.6	385.0	-	337.5	407	152.4	-	-	381.0	28.45	23.75	1½"-12	26.2	F12	125.0	M12X15	118.6	114.5	1607	
8"	inch	5.69	11.5	16.5	5.6	22.44	25.18	15.16	-	13.29	16.02	6.0	-	-	15.0	1.12	0.94	UNS-2A	1.03		4.92		261.4	252.4	1880	



Cryogenic Flanged Reduced Port Floating Ball

Components & Materials

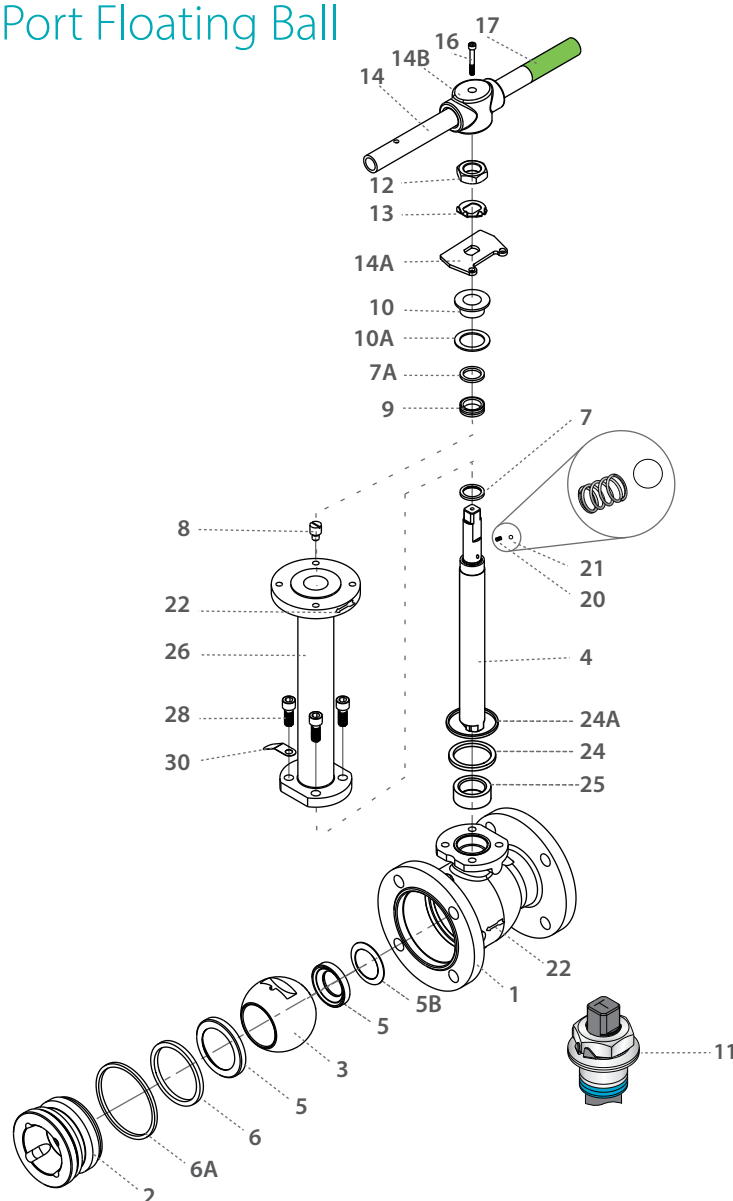

Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	Plug	Acc. Ordering Code	1
3	Ball	A351 CF8M, B574 N06022, Bronze RG5	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	2
5B	Upstream Seat Spring	Inconel 718	1
6*	Inner Seal	TFM	1
6A*	Outer Seal	Acc. Ordering Code	1
7*	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
8	Stop Pin	S. Steel	1
9*	Stem Seal	TFM	1
10	Follower	S. Steel	1
10A*	Slide Bearing	S. Steel	1
11	Disc Spring	S. Steel	2
12	Stem Nut	S. Steel	1
13	Tab Lock Washer	S. Steel	1

Item	Description	Material specifications	Qty.
14**	Handle	S. Steel	1
14A	Stop Plate	S. Steel	1
14B	Wrench Head	S. Steel	1
16	Wrench Bolt	S. Steel	1
17	Sleeve	PVC	1
20	Anti-Static Spring	S. Steel	2
21	Anti-Static Plunger	S. Steel	2
22	Arrow Flow	S. Steel	2
23	Tag (not shown)	S. Steel	1
24*	Bonnet Seal	PTFE, Graphite	1
25*	Stem Bearing	PTFE	1
26	Bonnet	S. Steel	1
28	Bolt	S. Steel	4
30	Dog Tag	S. Steel	1

* Maintenance kit components

** Gear operator should be used for size 6" DN150 and above (handle components are not included)


C31-BD

C32-BD

3"-8" | DN80-DN200 | CLASS 150/300

Cryogenic Flanged Reduced Port Floating Ball; BD - Bidirectional



Valve Dimensions

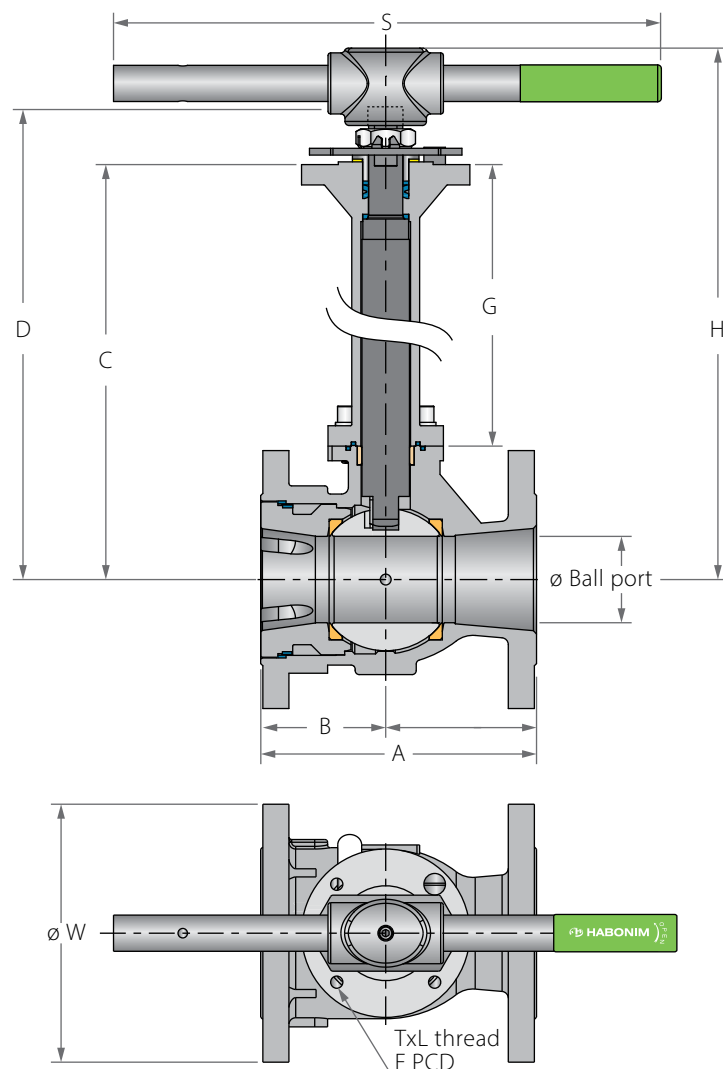

PATENTED

US 12044333

Preparation for actuation



Std. port	Unit	Ball port	A_31	A_32	B	Standard design				6" bonnet				S	W	M	M DD	N	P	F	TxL	Weight kg/lb		Kv	
						C	D	G	H	C	D	G	H									Std.	6"	Cv	
DN80	mm	63.8	203.2	282	92.1	463.3	509.9	343.5	550.5	272.2	318.8	152.4	359.4	610.0	210.0	18.92	15.9	1"-14	16.7	F10	102.0	M10X15	29	27.8	385
3"	inch	2.51	8.0	11.1	3.63	18.24	20.07	13.52	21.67	10.72	12.55	6.0	14.15	24.02	8.27	0.74	0.63	UNS-2A	0.66		4.02		63.9	61.3	450
DN100	mm	82.8	228.6	304.8	101.6	457.6	504.2	343.5	543.4	266.5	313.1	152.4	352.3	610.0	254	18.92	15.9	1"-14	16.7	F10	102.0	M10X15	44.6	43.4	615
4"	inch	3.26	9.0	12.0	4.0	18.02	19.85	13.52	21.39	10.49	12.33	6.0	13.87	24.02	10.0	0.74	0.63	UNS-2A	0.66		4.02		98.3	95.7	720
DN150	mm	111.3	266.8	403.2	107.8	561.0	630.5	385.0	-	328.4	397.9	152.4	-	-	318.0	28.45	23.75	1½"-12	26.2	F12	125.0	M12X15	92	89	872
6"	inch	4.38	10.5	15.87	4.24	22.09	24.82	15.16	-	12.93	15.67	6.0	-	-	12.52	1.12	0.94	UNS-2A	1.03		4.92		202.4	195.8	1020
DN200	mm	144.4	292.1	419.1	142.25	570.1	639.6	385.0	-	337.5	407	152.4	-	-	381.0	28.45	23.75	1½"-12	26.2	F12	125.0	M12X15	118.6	114.5	1607
8"	inch	5.69	11.5	16.5	5.6	22.44	25.18	15.16	-	13.29	16.02	6.0	-	-	15.0	1.12	0.94	UNS-2A	1.03		4.92		261.4	252.4	1880

C31-BD

C32-BD


3"-8" | DN80-DN200
CLASS 150/300

Cryogenic Flanged Reduced Port Floating Ball

Components & Materials

PATENTED

US 12044333

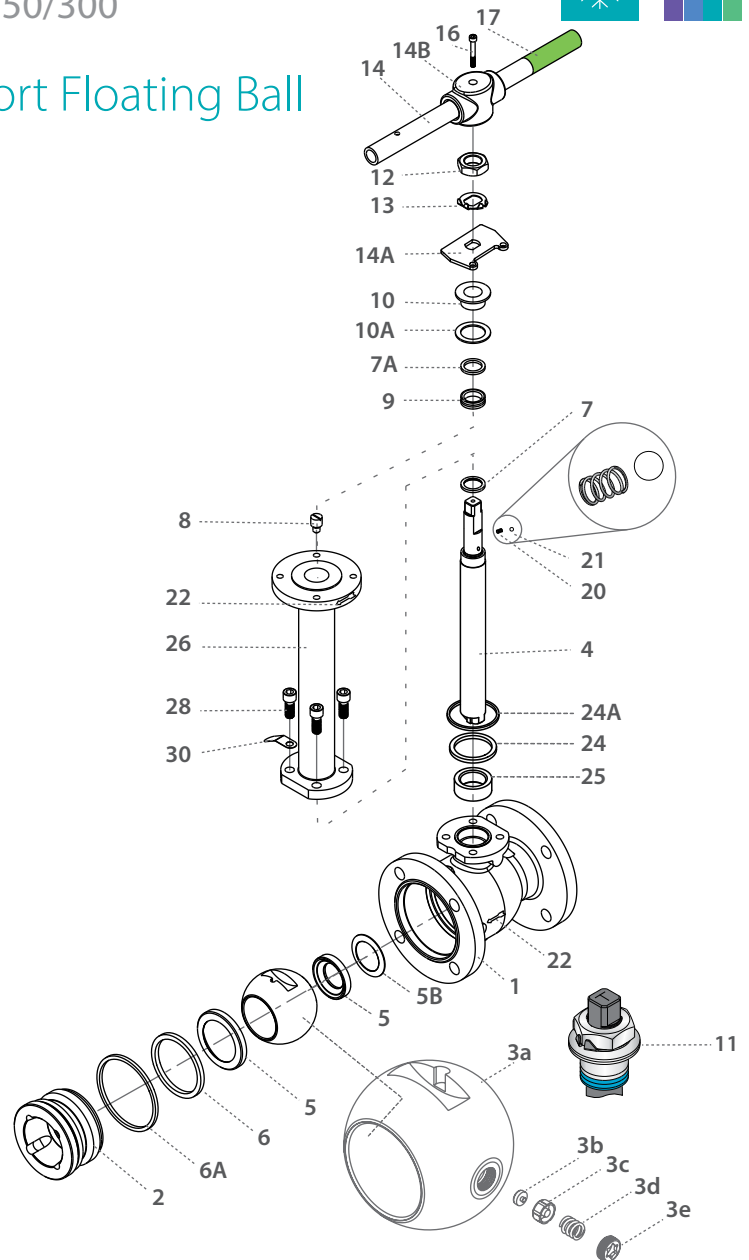

Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	Plug	Acc. Ordering Code	1
3a	Ball With Integrated PRV	S.Steel	1
3b	Insert	MOD PTFE, CF PTFE, PCTFE	1
3c	Piston	S.Steel	1
3d	Spring	INCONEL® X-750	1
3e	Nut	S.Steel	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	2
5B	Upstream Seat Spring	Inconel 718	1
6*	Inner Seal	TFM	1
6A*	Outer Seal	Acc. Ordering Code	1
7*	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
8	Stop Pin	S. Steel	1
9*	Stem Seal	TFM	1
10	Follower	S. Steel	1
10A*	Slide Bearing	S. Steel	1
11	Disc Spring	S. Steel	2

Item	Description	Material specifications	Qty.
12	Stem Nut	S. Steel	1
13	Tab Lock Washer	S. Steel	1
14**	Handle	S. Steel	1
14A	Stop Plate	S. Steel	1
14B	Wrench Head	S. Steel	1
16	Wrench Bolt	S. Steel	1
17	Sleeve	PVC	1
20	Anti-Static Spring	S. Steel	2
21	Anti-Static Plunger	S. Steel	2
22	Arrow Flow	S. Steel	2
23	Tag (not shown)	S. Steel	1
24*	Bonnet Seal	PTFE, Graphite	1
25*	Stem Bearing	PTFE	1
26	Bonnet	S. Steel	1
28	Bolt	S. Steel	4
30	Dog Tag	S. Steel	1

* Maintenance kit components

** Gear operator should be used for size 6" DN150 and above (handle components are not included)

C73


C74

C78


½"-1" | DN15-DN25
CLASS 150/300/PN 40

Cryogenic Flanged Full Port Floating Ball

Valve Dimensions

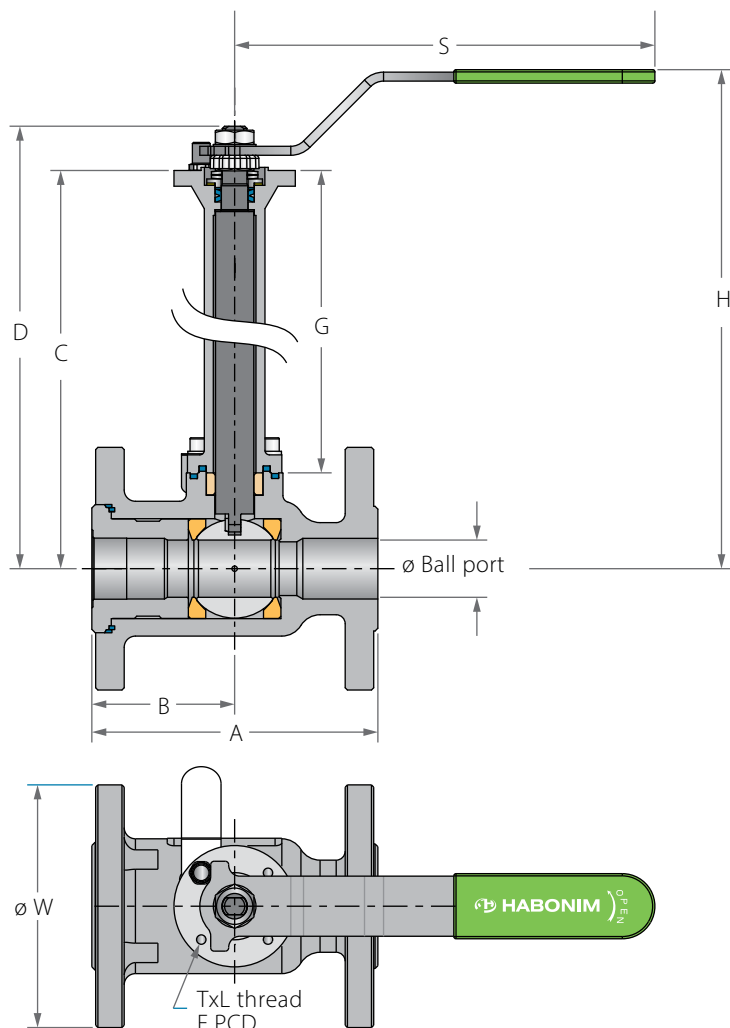

Preparation for actuation

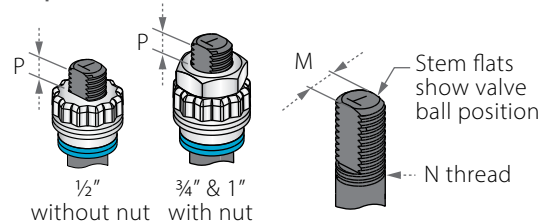

C73 C74

Full Port	Unit	Ball port	A		B	Standard design				6" bonnet				S	W		M	N	P	TxL	F	PCD	Weight (Kg /lb)					
			C73	C74		C	D	G	H	C	D	G	H		C73	C74							C73		C74		Kv	
																							Std.	6"	Std.	6"		Cv
DN15	mm	14.3	108.0	140.0	48.5	334.7	343.6	304.0	368.0	183.1	192.0	152.0	216.0	150.0	89.0	95.0	5.5	⅜"	6.0	M5X7	F03	36.0	2.8	2.4	3.3	2.9	26.0	
½"	inch	0.56	4.25	5.51	1.91	13.18	13.53	11.97	14.47	7.21	7.56	6.0	8.50	5.91	3.50	3.74	0.22	UNF	0.24			1.42	6.16	5.28	7.26	6.38	30.0	
DN20	mm	20.6	117.0	152.0	59.0	342.2	359.65	304.0	387.0	190.6	208.1	152.0	235.0	187.0	98.0	117.0	7.5	⅞"	6.0	M5X7	F04	42.0	3.9	3.1	4.7	3.9	43.0	
¾"	inch	0.81	4.61	5.98	2.32	13.47	14.16	11.97	15.22	7.50	8.19	6.0	9.25	7.36	3.86	4.61	0.3	UNF	0.24			1.65	8.58	6.82	10.34	8.58	50.0	
DN25	mm	25.4	127.0	165.0	63.5	353.7	371.15	304.0	398.0	202.1	219.6	152.0	247.0	187.0	108.0	125.0	7.5	⅞"	6.0	M5X7	F04	42.0	4.9	4.1	6.3	5.5	82.0	
1"	inch	1.0	5.0	6.50	2.50	13.92	14.61	11.97	15.68	7.95	8.64	6.0	9.71	7.36	4.25	4.92	0.3	UNF	0.24			1.65	10.78	9.02	13.86	12.1	95.0	

C78

Full Port	Unit	Ball port	A		B	Standard design				6" bonnet				S	W		M	N	P	TxL	F	PCD	Weight (Kg /lb)						Kv
			F1	F4		C	D	G	H	C	D	G	H		F1	F4							F1		F4		Cv		
																							Std.	6"	Std.	6"			
DN15	mm	14.3	130.0	115.0	48.5	334.7	343.6	304.0	368.0	183.1	192.0	152.0	216.0	150.0	95.0	95.0	5.5	⅜"	6.0	M5X7	F03	36	3.2	2.8	3.1	2.7	26.0		
½"	inch	0.56	5.12	4.53	1.91	13.18	13.53	11.97	14.47	7.21	7.56	6.0	8.50	5.91	3.74	3.74	0.22	UNF	0.24			1.42	7.04	6.16	6.82	5.94	30.0		
DN20	mm	20.6	150.0	120.0	59.0	342.2	359.65	304.0	387	190.6	208.1	152.0	235.0	187.0	105.0	105.0	7.5	⅞"	6.0	M5X7	F04	42	4.9	4.1	4.7	3.9	43.0		
¾"	inch	0.81	5.91	4.72	2.32	13.47	14.16	11.97	15.22	7.50	8.19	6.00	9.25	7.36	4.13	4.13	0.30	UNF	0.24			1.65	10.78	9.02	10.34	8.58	50.0		
DN25	mm	25.4	160.0	125.0	63.5	353.7	371.15	304.0	398.0	202.1	219.6	152.0	247.0	187.0	115.0	115.0	7.5	⅞"	6.0	M5X7	F04	42	5.9	5.1	5.7	4.9	82.0		
1"	inch	1.0	6.30	4.92	2.50	13.92	14.61	11.97	15.68	7.95	8.64	6.0	9.71	7.36	4.53	4.53	0.30	UNF	0.24			1.65	12.98	11.22	12.54	10.78	95.0		

C73

C74


C78

½"-1" | DN15-DN25
CLASS 150/300/PN 40



Cryogenic Flanged Full Port Floating Ball

Components & Materials

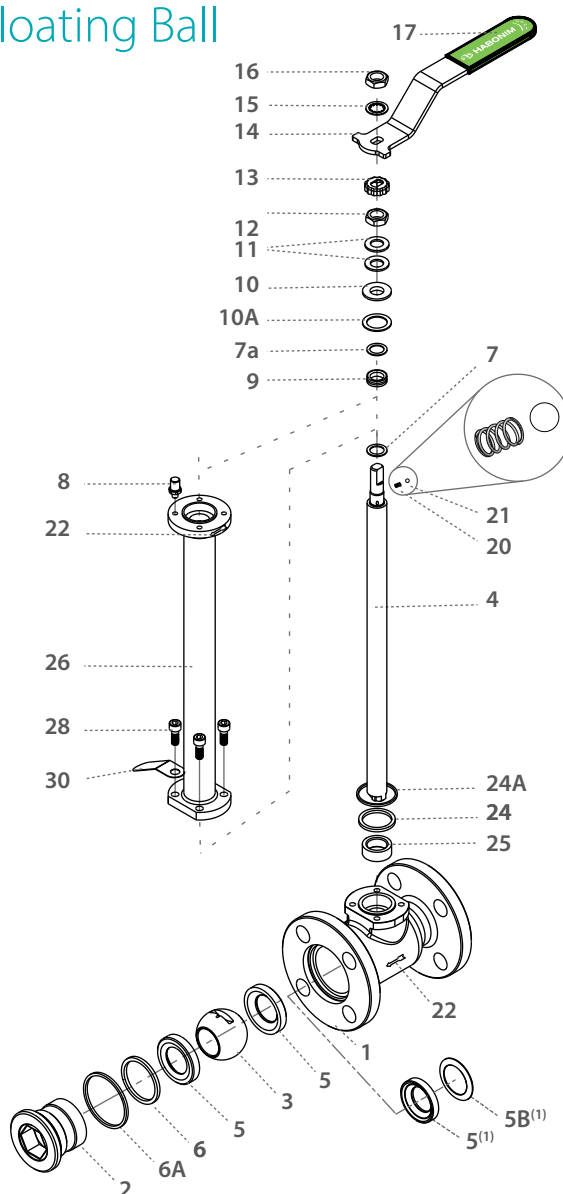

Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	Plug	Acc. Ordering Code	1
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	2
5B	Upstream Seat Spring	Inconel 718	1
6*	Inner Seal	TFM	1
6A*	Outer Seal	Acc. Ordering Code	1
7*	Stem Thrust Seal	PCTFE	1
7a*	Anti-Abrasion Ring	PCTFE	1
8	Stop Pin	S. Steel	1
9*	Stem Seal	TFM	1
10	Follower	S. Steel	1
10A	Slide Bearing	S. Steel	1
11	Disc Spring	S. Steel	2
12	Stem Nut	S. Steel	1
13	Locking Clip	S. Steel	1

Item	Description	Material specifications	Qty.
14	Handle	S. Steel	1
15	Serrated Washer	S. Steel	1
16	Handle Nut	S. Steel	1
17	Sleeve	PVC	1
20	Anti-Static Spring	S. Steel	1
21	Anti-Static Plunger	S. Steel	1
22	Arrow Flow	S. Steel	2
23	Tag (not shown)	S. Steel	1
24*	Bonnet Inner Seal	TFM	1
24A*	Bonnet Outer Seal	Acc. Ordering Code	1
25*	Stem Bearing	PTFE	1
26	Bonnet	S. Steel	1
28	Bolt	S. Steel	4
30	Dog Tag	S. Steel	1

* Maintenance kit components

⁽¹⁾ Optional Dynamic seat design

C73


C74

C78


1¼"-1½" | DN32-DN40
CLASS 150/300/PN 40

Cryogenic Flanged Full Port Floating Ball

Valve Dimensions

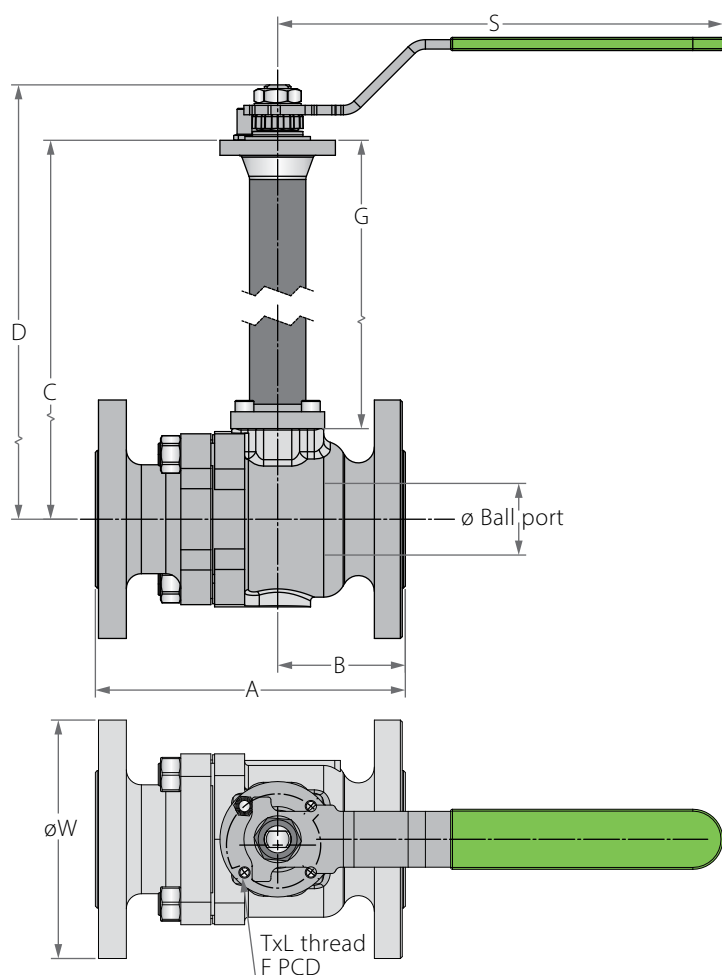

Preparation for actuation

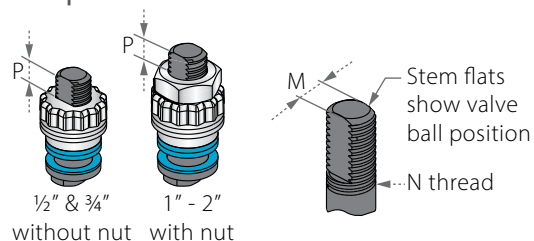

C73 C74

Full Port	Unit	Ball port	A		B		Standard design				6" bonnet				S	W		M	N	P	TxL	F	PCD	Weight (Kg /lb)				Kv
			C73	C74	C73	C74	C	D	G	H	C	D	G	H		C73	C74							C73		C74		
																								Std.	6"	Std.	6"	Cv
DN32	mm	31.8	140.0	-	59.0	-	353.3	382.8	304.0	407.0	201.7	231.2	152.0	255.0	237.0	115.0	-	8.6	9/16"	8.0	M6X8	F05	50.0	-	-	8.15	7.35	216.0
1¼"	inch	1.25	5.51	-	2.32	-	13.91	15.07	11.97	16.02	7.94	9.10	6.0	10.05	9.33	4.53	-	0.34	UNF	0.31	M6X8	F05	1.97	-	-	17.93	16.17	250.0
DN40	mm	38.1	165.0	190.5	68.0	80.5	352.3	381.75	304.0	406.0	200.7	230.2	152.0	254.0	237.0	127.0	156.0	8.6	9/16"	8.0	M6X8	F05	50.0	11.0	10.2	10.3	9.5	216.0
1½"	inch	1.50	6.50	7.50	2.68	3.17	13.87	15.03	11.97	15.97	7.90	9.06	6.0	10.01	9.33	5.0	6.14	0.34	UNF	0.31	M6X8	F05	1.97	24.2	22.44	22.66	20.9	250.0

C78

Full Port	Unit	Ball port	A		B		Standard design				6" bonnet				S	W		M	N	P	TxL	F	PCD	Weight (Kg /lb)				Kv					
			F1	F4	F1	F4	C	D	G	H	C	D	G	H		F1	F4							F1		F4			Std.	6"	Std.	6"	Cv
DN32	mm	31.8	140.0	-	59.0	-	353.3	382.8	304.0	407.0	201.7	231.2	152.0	255.0	237.0	115.0	-	8.6	9/16"	8.0	M6X8	F05	50.0	-	-	8.15	7.35	216.0					
1¼"	inch	1.25	5.51	-	2.32	-	13.91	15.07	11.97	16.02	7.94	9.10	6.0	10.05	9.33	4.53	-	0.34	UNF	0.31	M6X8	F05	1.97	-	-	17.93	16.17	250.0					
DN40	mm	38.1	165.0	190.5	68.0	80.5	352.3	381.75	304.0	406.0	200.7	230.2	152.0	254.0	237.0	127.0	156.0	8.6	9/16"	8.0	M6X8	F05	50.0	11.0	10.2	10.3	9.5	216.0					
1½"	inch	1.50	6.50	7.50	2.68	3.17	13.87	15.03	11.97	15.97	7.90	9.06	6.0	10.01	9.33	5.0	6.14	0.34	UNF	0.31	M6X8	F05	1.97	24.2	22.44	22.66	20.9	250.0					

C73

C74


C78

1¼"-1½" | DN32-DN40
CLASS 150/300/PN 40



Cryogenic Flanged Full Port Floating Ball

Components & Materials

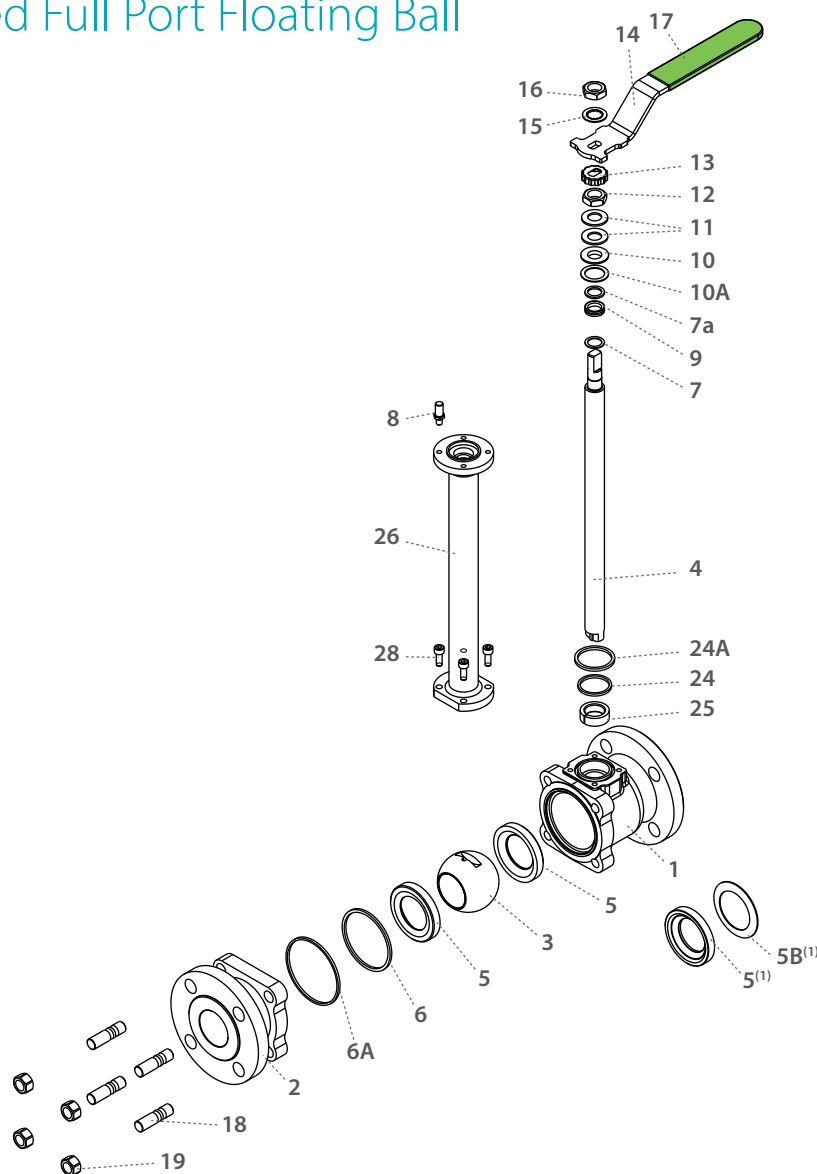

Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	End	Acc. Ordering Code	1
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	2
5B	Upstream Seat Spring	Inconel 718	1
6*	Inner Seal	TFM	1
6A*	Outer Seal	Acc. Ordering Code	1
7*	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
8	Stop Pin	S. Steel	1
9*	Stem Seal	TFM	1
10	Follower	S. Steel	1
10A*	Slide Bearing	S. Steel	1

Item	Description	Material specifications	Qty.
11	Disc Spring	S. Steel	1
12	Stem Nut	S. Steel	1
13	Locking Clip	S. Steel	1
14	Handle	S. Steel	1
15	Serated Washer	S. Steel	1
16	Handle Nut	S. Steel	1
17	Sleeve	PVC	1
18	Body Studs	S. Steel	4
19	Body Nuts	S. Steel	4
24*	Bonnet Inner Seal	TFM	1
24A*	Bonnet Outer Seal	Acc. Ordering Code	1
25*	Stem Bearing	PTFE	1
26	Bonnet	S. Steel	1
28	Bolt	S. Steel	4

* Maintenance kit components

⁽¹⁾ Optional Dynamic seat design

C73



C74

C77


2"-8"⁽¹⁾ | DN50-DN200
CLASS 150/300/PN 16

Cryogenic Flanged Full Port Floating Ball

Valve Dimensions

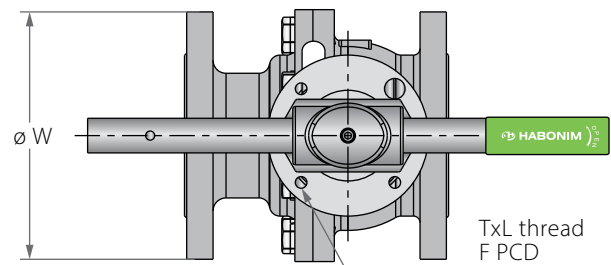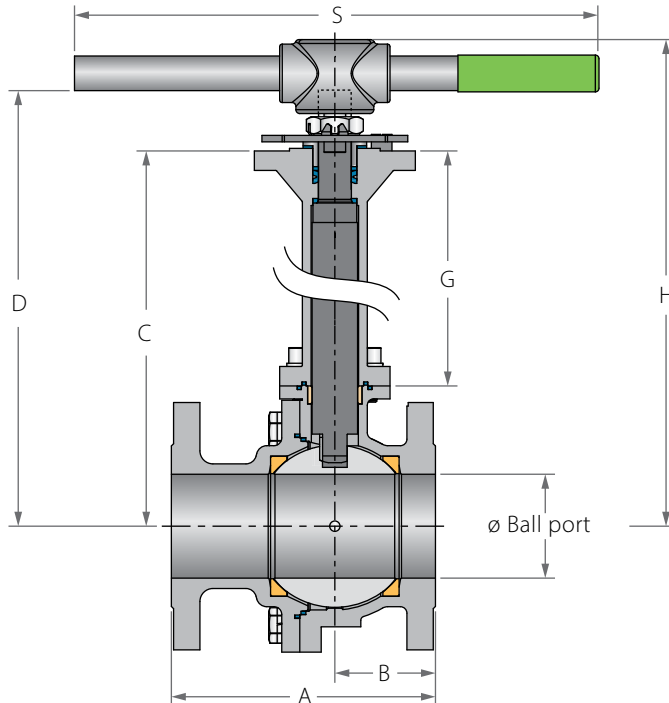

Preparation for actuation

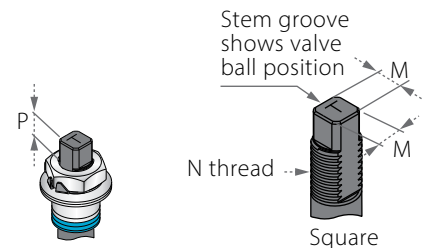

C73 C74

Full Port	Unit	Ball port	A		B		Standard Bonnet				6" bonnet				S	W		M	N	P	TxL	F	PCD	Weight (Kg /lb)					Kv
			C73	C74	C73	C74	C	D	G	H	C	D	G	H		C73	C74							C73		C74		Cv	
																								Std.	6" 1	Std.	6"		
DN50	mm	50.8	178	216.0	69.0	75.2	397.5	439.1	328.0	466.0	222.4	264.0	152.0	291.0	400.0	152.0	165.0	13.9	M20	13.5	M8x8	F07	70.0	16.2	14.5	18.9	17.2	415	
2"	inch	2.0	7.01	8.50	2.72	2.96	15.65	17.29	12.89	18.35	8.76	10.39	6.0	11.46	15.75	5.98	6.50	0.55		0.53			2.76	35.64	31.9	41.58	37.84	480	
DN65	mm	63.5	190.0	-	83.0	-	463.3	509.8	344.0	550.0	272.2	318.7	152.0	359.0	610.0	180.0	-	18.9	1"-14	16.5	M10x15	F10	102.0	30.25	27.25	-	-	735	
2½"	inch	2.50	7.48	-	3.27	-	18.24	20.07	13.52	21.66	10.72	12.55	6.0	14.14	24.02	7.09	-	0.74	UNS-2A	0.65			4.02	66.55	59.95	-	-	850	
DN80	mm	80.0	203.0	282.0	77.5	96.4	451.5	498.0	344.0	538.0	260.4	306.9	152.0	347.0	610.0	190.5	210.0	18.9	1"-14	16.5	M10x15	F10	102.0	31.0	28.0	37.2	34.2	1125	
3"	inch	3.15	7.99	11.10	3.05	3.80	17.78	19.61	13.52	21.20	10.25	12.08	6.0	13.67	24.02	7.50	8.27	0.74	UNS-2A	0.65			4.02	68.2	61.6	81.84	75.24	1300	
DN100	mm	100.0	229.0	305.0	84.5	104.5	467.5	514.0	344.0	554.0	276.4	322.9	152.0	363.0	610.0	230.0	24.0	18.9	1"-14	16.5	M10x15	F10	102.0	48.0	45.0	53.5	50.5	2076	
4"	inch	3.94	9.02	12.01	3.33	4.11	18.41	20.24	13.52	21.83	10.88	12.71	6.0	14.30	24.02	9.06	0.94	0.74	UNS-2A	0.65			4.02	105.6	99.0	117.7	111.1	2400	
DN150	mm	150.0	394.0	403.5	163.5	174.5	564.0	633.5	385.0	-	331.4	400.9	152.0	-	-	280.0	318.0	28.5	1½"-12	26.0	M12x15	F12	125.0	98.0	92.0	116.0	110.0	4671	
6"	inch	5.91	15.51	15.89	6.44	6.87	22.20	24.94	15.16	-	13.05	15.78	6.0	-	-	11.02	12.52	1.12	UNF-2A	1.02			4.92	215.6	202.4	255.2	242.0	5400	
DN200	mm	200.0	457.0	502.0	242.5	241.0	626.0	738.5	385.0	-	393.4	505.9	152.0	-	-	343.0	381.0	35.9	2"	40.0	M16x20	F14	140.0	218.0	208.0	253.0	243.0	8045	
8"	inch	7.87	17.99	19.76	9.55	9.49	24.65	29.07	15.16	-	15.49	19.92	6.0	-	-	13.50	15.0	1.41	UN-2A	1.57			5.51	479.6	457.6	556.6	534.6	9300	

¹ 6" Bonnet

C77 C78

Full Port	Unit	Ball port	A		B		Standard Bonnet				6" bonnet				S	W		M	N	P	TxL	F	PCD	Weight (Kg /lb)					Kv				
			C78	C77	C78	C77	C	D	G	H	C	D	G	H		C78	C77							C78		C77		Std.		6" ¹	Std.	6" ¹	Cv
DN50	mm	50.8	150*/230**	-	60.5	-	397.5	439.1	327.5	466.0	222.4	264.0	152.0	291.0	400.0	165.0	-	13.9	M20	13.5	M8X8	F07	70.0	16.2*/17.4**	14.5*/15.7**	-	-	415					
2"	inch	2.0	5.91/9.06	-	2.38	-	15.65	17.29	12.89	18.35	8.76	10.39	6.0	11.46	15.75	6.50	-	0.55		0.53			2.76	35.6/38.3	31.9/34.5	-	-	480					
DN65	mm	63.5	170.0	-	83	-	463.3	509.8	344	550	272.2	318.7	152	359	610	185.0	-	18.9	1"-14	16.5	M10X15	F10	102.0	29.0	26.0	-	-	735					
2½"	inch	2.50	6.69	-	3.27	-	18.24	20.07	13.52	21.66	10.72	12.55	6.0	14.14	24.02	7.28	-	0.74	UNS-2A	0.65			4.02	63.8	57.2	-	-	850					
DN80	mm	80.0	-	180.0	-	77.5	451.5	498.0	344.0	538.0	260.4	306.9	152.0	347.0	610.0	-	200.0	18.9	1"-14	16.5	M10X15	F10	102.0	-	-	35.0	32.0	1125					
3"	inch	3.15	-	7.09	-	3.05	17.78	19.61	13.52	21.20	10.25	12.08	6.0	13.67	24.02	-	7.87	0.74	UNS-2A	0.65			4.02	-	-	77.0	70.4	1300					
DN100	mm	100.0	-	190.0	-	84.5	467.5	514.0	344.0	554.0	276.4	322.9	152.0	363.0	610.0	-	220.0	18.9	1"-14	16.5	M10X15	F10	102.0	-	-	48.0	45.0	2076					
4"	inch	3.94	-	7.48	-	3.33	18.41	20.24	13.52	21.83	10.88	12.71	6.0	14.30	24.02	-	8.66	0.74	UNS-2A	0.65			4.02	-	-	105.6	99.0	2400					
DN150	mm	150.0	-	350.0	-	163.5	564.0	633.5	385.0	-	331.4	400.9	152.0	-	-	-	285	28.5	1½"-12	26	M12X15	F12	125.0	-	-	104.0	98.0	4671					
6"	inch	5.91	-	13.78	-	6.44	22.20	24.94	15.16	-	13.05	15.78	6.0	-	-	-	11.2	1.12	UNF-2A	1.02			4.92	-	-	228.8	215.6	5400					

¹ 6" Bonnet

C73

C74


C77

2"-8"⁽¹⁾ | DN50-DN200
CLASS 150/300/PN 16



Cryogenic Flanged Full Port Floating Ball

Components & Materials

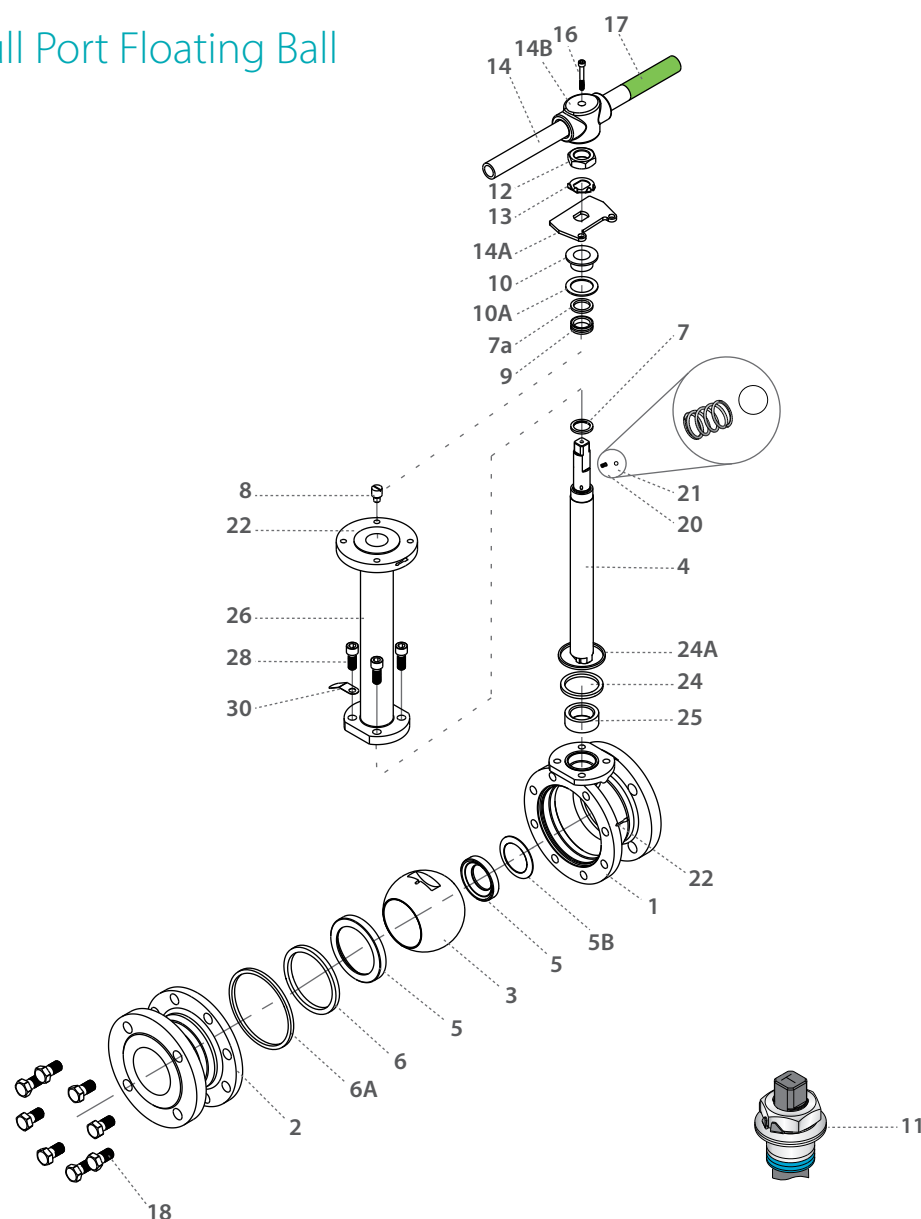

Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	End	Acc. Ordering Code	1
3	Ball	Acc. Ordering Code	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	2
5B	Upstream Seat Spring	Inconel 718	1
6*	Inner Seal	TFM	1
6A*	Outer Seal	Acc. Ordering Code	1
7*	Stem Thrust Seal	PCTFE	1
7a*	Anti-Abrasion Ring	PCTFE	1
8	Stop Pin	S. Steel	1
9*	Stem Seal	TFM	1
10	Follower	S. Steel	1
10A*	Slide Bearing	S. Steel	1
11	Disc Spring	S. Steel	2
12	Stem Nut	S. Steel	1
13	Tab Lock Washer	S. Steel	1
14**	Handle	S. Steel	1

Item	Description	Material specifications	Qty.
14A	Stop Plate	S. Steel	1
14B	Wrench Head	S. Steel	1
16	Wrench Bolt	S. Steel	1
17	Sleeve	PVC	1
18	Body Bolt	S. Steel	8-10
20	Anti-Static Spring	S. Steel	2
21	Anti-Static Plunger	S. Steel	2
22	Arrow Flow	S. Steel	2
23	Tag (not shown)	S. Steel	1
24*	Bonnet Inner Seal	TFM	1
24A*	Bonnet Outer Seal	Acc. Ordering Code	1
25*	Stem Bearing	PTFE	1
26	Bonnet	S. Steel	1
28	Bolt	S. Steel	4
30	Dog Tag	S. Steel	1

* Maintenance kit components

** Gear operator should be used for size 6" DN150 and above (handle components are not included)

⁽¹⁾ C77 up to 6"

C73-BD



C74-BD

C77-BD


2"-8"⁽¹⁾ | DN50-DN200
CLASS 150/300/PN 16

Cryogenic Flanged Full Port Floating Ball; BD - Bidirectional

Valve Dimensions

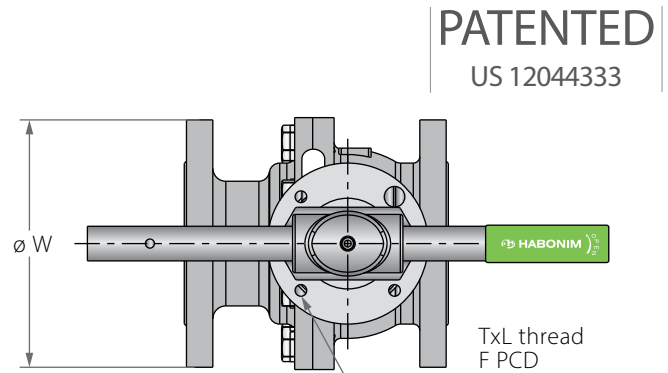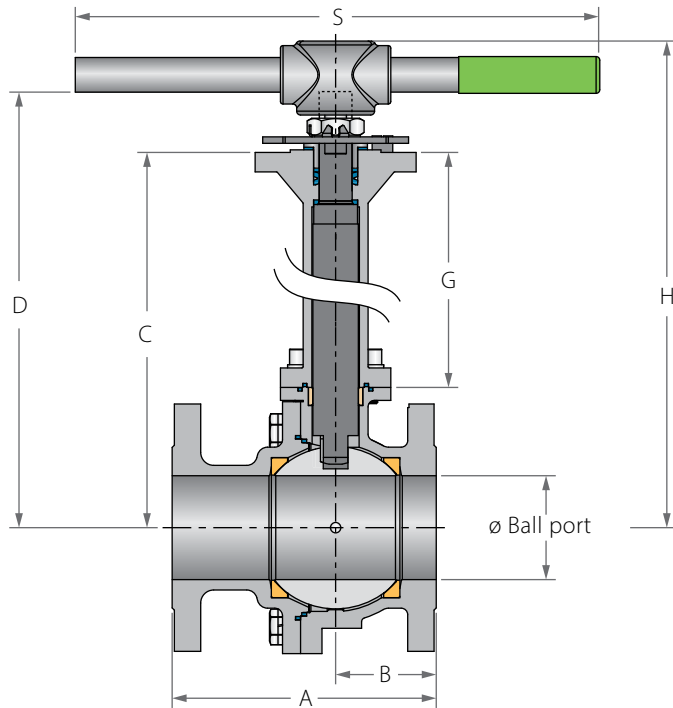PATENTED
US 12044333

Preparation for actuation

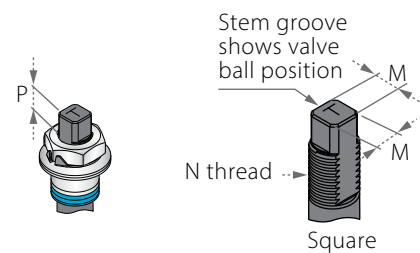

C73 C74

Full Port	Unit	Ball port	A		B		Standard Bonnet				6" bonnet				S	W		M	N	P	TxL	F	PCD	Weight (Kg /lb)				Kv
			C73	C74	C73	C74	C	D	G	H	C	D	G	H		C73	C74							C73		C74		
																								Std.	6" *	Std.	6" *	
DN50	mm	508	178.0	216.0	68.0	80.5	397.5	439.1	328.0	466.0	222.4	264.0	152.0	291.0	400.0	152.0	165.0	13.9	M20	13.5	M8X8	F07	16.2	14.5	-	-	433	415
2"	inch	2.00	7.01	8.50	2.68	3.17	15.65	17.29	12.89	18.35	8.76	10.39	6.0	11.46	15.75	5.98	6.50	0.55		0.53			35.64	31.9	-	-	500	480
DN65	mm	635	190.0	-	83.0	-	463.3	509.8	344.0	550.0	272.2	318.7	152.0	359.0	610.0	180.0	-	18.9	1"-14	16.5	M10X15	F10	30.25	27.25	-	-	735	735
2½"	inch	2.50	7.48	-	3.27	-	18.24	20.07	13.52	21.66	10.72	12.55	6.0	14.14	24.02	7.09	-	0.74	UNS-2A	0.65			66.55	59.95	-	-	850	850
DN80	mm	800	203.0	282.0	77.5	96.4	451.5	498.0	344.0	538.0	260.4	306.9	152.0	347.0	610.0	190.5	210.0	18.9	1"-14	16.5	M10X15	F10	31.0	28.0	37.2	34.2	1125	1125
3"	inch	3.15	7.99	11.10	3.05	3.80	17.78	19.61	13.52	21.20	10.25	12.08	6.0	13.67	24.02	7.50	8.27	0.74	UNS-2A	0.65			68.2	61.6	81.84	75.24	1300	1300
DN100	mm	1000	229.0	305.0	84.5	104.5	467.5	514.0	344.0	554.0	276.4	322.9	152.0	363.0	610.0	230.0	24.0	18.9	1"-14	16.5	M10X15	F10	48.0	45.0	53.5	50.5	2076	2076
4"	inch	3.94	9.02	12.01	3.33	4.11	18.41	20.24	13.52	21.83	10.88	12.71	6.0	14.30	24.02	9.06	0.94	0.74	UNS-2A	0.65			105.6	99.0	117.7	111.1	2400	2400
DN150	mm	1500	394.0	403.5	163.5	174.5	564.0	633.5	385.0	-	331.4	400.9	152.0	-	-	280.0	318.0	28.5	1½"-12	26	M12X15	F12	98.0	92.0	116.0	110.0	4671	4671
6"	inch	5.91	15.51	15.89	6.44	6.87	22.20	24.94	15.16	-	13.05	15.78	6.0	-	-	11.02	12.52	1.12	UNF-2A	1.02			215.6	202.4	255.2	242.0	5400	5400
DN200	mm	2000	457.0	502.0	242.5	241.0	626.0	738.5	385.0	-	393.4	505.9	152.0	-	-	343.0	381.0	35.9	2"	40	M16X20	F14	218.0	208.0	253.0	243.0	8045	8045
8"	inch	7.87	17.99	19.76	9.55	9.49	24.65	29.07	15.16	-	15.49	19.92	6.0	-	-	13.50	15.0	1.41	UN-2A	1.57			479.6	457.6	556.6	534.6	9300	9300

* 6" Bonnet

C77 C78

Full Port	Unit	Ball port	A		B		Standard Bonnet				6" bonnet				S	W		M	N	P	TxL	F	PCD	Weight (Kg /lb)				Kv
			C78	C77	C78	C77	C	D	G	H	C	D	G	H		C78	C77							C78		C77		
																								Std.	6" *	Std.	6" *	
DN50	mm	50.8	150.0	-	83.0	-	327.5	369.1	328.0	396.0	152.4	194.0	152.0	221.0	610.0	165.0	-	18.9	1"-14	16.5	M10X15	F10	102.0	16.2	14.5	-	-	433
2"	inch	2.00	5.91	-	3.27	-	12.89	14.53	12.89	15.59	6.0	7.64	6.0	8.70	24.02	6.50	-	0.74	UNS-2A	0.65			4.02	35.64	31.9	-	-	500
DN65	mm	63.5	170.0	-	83.0	-	463.3	509.8	344.0	550.0	272.2	318.7	152.0	359.0	610.0	185.0	-	18.9	1"-14	16.5	M10X15	F10	102.0	29.0	26.0	-	-	735
2½"	inch	2.50	6.69	-	3.27	-	18.24	20.07	13.52	21.66	10.72	12.55	6.0	14.14	24.02	7.28	-	0.74	UNS-2A	0.65			4.02	63.8	57.2	-	-	850
DN80	mm	80.0	-	180.0	-	77.5	451.5	498.0	344.0	538.0	260.4	306.9	152.0	347.0	610.0	-	200.0	18.9	1"-14	16.5	M10X15	F10	102.0	-	-	35.0	32.0	1125
3"	inch	3.15	-	7.09	-	3.05	17.78	19.61	13.52	21.20	10.25	12.08	6.0	13.67	24.02	-	7.87	0.74	UNS-2A	0.65			4.02	-	-	77.0	70.4	1300
DN100	mm	100.0	-	190.0	-	84.5	467.5	514.0	344.0	554.0	276.4	322.9	152.0	363.0	610.0	-	220.0	18.9	1"-14	16.5	M10X15	F10	102.0	-	-	48.0	45.0	2076
4"	inch	3.94	-	7.48	-	3.33	18.41	20.24	13.52	21.83	10.88	12.71	6.0	14.30	24.02	-	8.66	0.74	UNS-2A	0.65			4.02	-	-	105.6	99.0	2400
DN150	mm	150.0	-	350.0	-	163.5	564.0	633.5	385.0	-	331.4	400.9	152.0	-	-	-	28.05	28.5	1½"-12	26	M12X15	F12	125.0	-	-	104.0	98.0	4671
6"	inch	5.91	-	13.78	-	6.44	22.20	24.94	15.16	-	13.05	15.78	6.0	-	-	-	11.22	1.12	UNF-2A	1.02			4.92	-	-	228.8	215.6	5400

* 6" Bonnet

C73-BD

C74-BD

C77-BD


2"-8"⁽¹⁾ | DN50-DN200
CLASS 150/300/PN 16

Cryogenic Flanged Full Port Floating Ball

Components & Materials

PATENTED

US 12044333

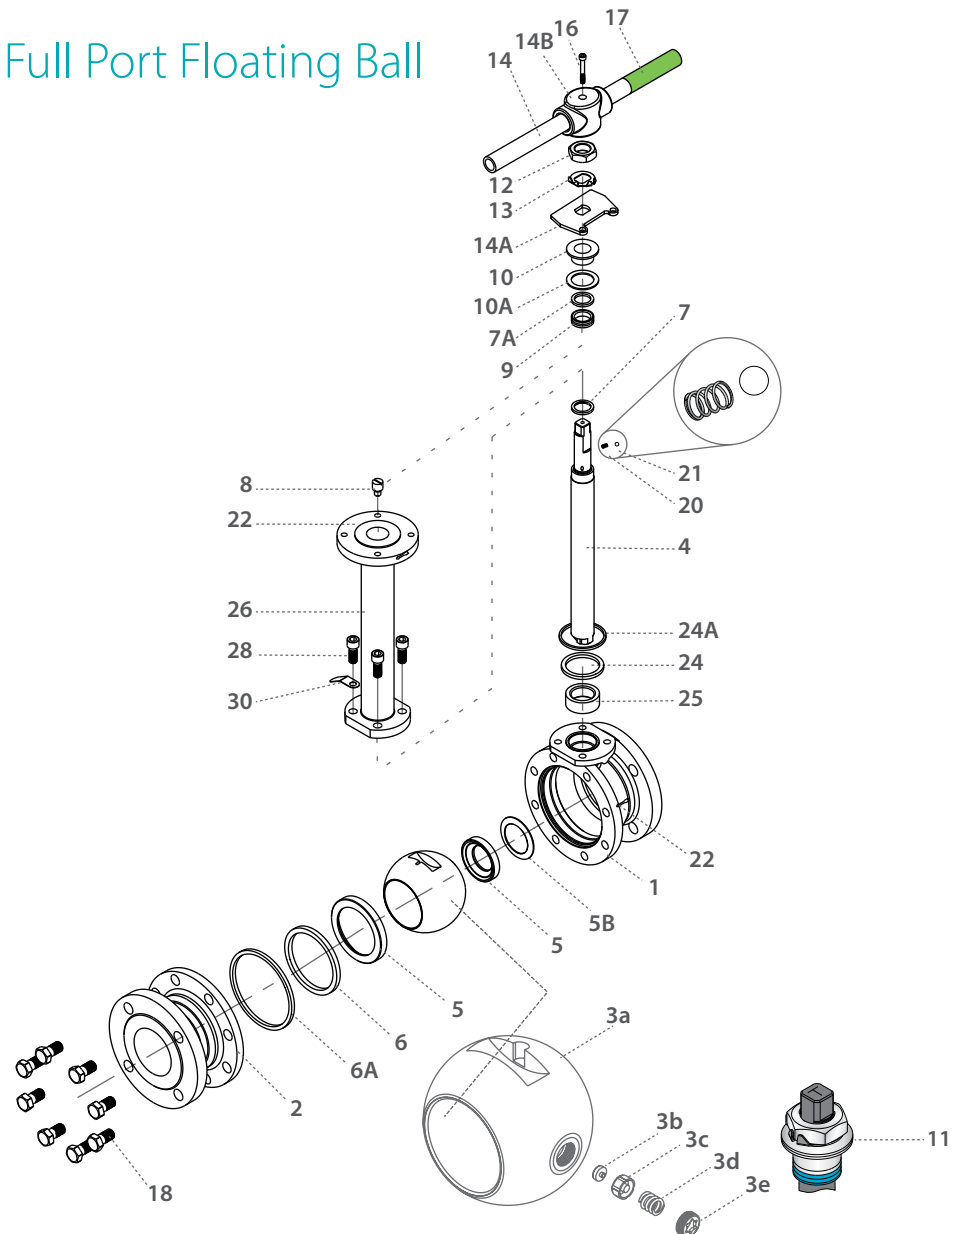

Item	Description	Material specifications	Qty.
1	Body	Acc. Ordering Code	1
2	End	Acc. Ordering Code	1
3a	Ball With Integrated PRV	S.Steel	1
3b	Insert	MOD PTFE, CF PTFE, PCTFE	1
3c	Piston	S.Steel	1
3d	Spring	INCONEL® X-750	1
3e	Nut	S.Steel	1
4	Stem	Acc. Ordering Code	1
5*	Seat	Acc. Ordering Code	2
5B	Upstream Seat Spring	Inconel 718	1
6*	Inner Seal	TFM	1
6A*	Outer Seal	Acc. Ordering Code	1
7*	Stem Thrust Seal	PCTFE	1
7A*	Anti-Abrasion Ring	PCTFE	1
8	Stop Pin	S.Steel	1
9*	Stem Seal	TFM	1
10	Follower	S.Steel	1
10A*	Slide Bearing	S.Steel	1
11	Disc Spring	S.Steel	2
12	Stem Nut	S.Steel	1
13	Tab Lock Washer	S.Steel	1

Item	Description	Material specifications	Qty.
14**	Handle	S. Steel	1
14A	Stop Plate	S. Steel	1
14B	Wrench Head	S. Steel	1
16	Wrench Bolt	S. Steel	1
17	Sleeve	PVC	1
18	Body Bolt	S. Steel	8-10
20	Anti-Static Spring	S. Steel	2
21	Anti-Static Plunger	S. Steel	2
22	Arrow Flow	S. Steel	2
23	Tag (not shown)	S. Steel	1
24*	Bonnet Inner Seal	TFM	1
24A*	Bonnet Outer Seal	Acc. Ordering Code	1
25*	Stem Bearing	PTFE	1
26	Bonnet	S. Steel	1
28	Bolt	S. Steel	4
30	Dog Tag	S. Steel	1

* Maintenance kit components

** Gear operator should be used for size 6" DN150 and above (handle components are not included)

⁽¹⁾ C77 up to 6"

C31

C32

C73

C74

C77

C78



C31-BD

C32-BD

C73-BD

C74-BD

C77-BD

Cryogenic Flanged Full Port Floating Ball - Ordering Code System

"Mandatory option" options are marked with **green background** | "Standard offer" options are marked with **light green background**

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	.	.	.	30
4	0			F	C	7	3	W	-	6	6	6	M	A	A	G	/	1	5	0		-					
Size		Features				Series		Design		Body/ End		Ball material	Seat material	Seat/ Seals				End connection				Special features					

Size (1-2)		
Code	inch	mm
05	½"	15
07	¾"	20
10	1"	25
12*	1¼"	32
15	1½"	40
20	2"	50
25*	2½"	65
30	3"	80
40	4"	100
60	6"	150
80	8"	200

* only for series C73/C78

Features (3-6)	
C	Cryogenic
F	Fire safe
N	Control service
Series (7-8)	
31	ANSI #150 std. port
32	ANSI #300 std. port
73	ANSI #150 full port
74	ANSI #300 full port
77	DIN PN 16 full port
78	DIN PN 40 full port
Design (9)	
W	Total HermetiX Integrity package
Body material (11)	
6	CF8M
7	Monel
End material (12)	
6	CF8M
7	Monel

Ball material (13)	
6	S. St.
7	Monel
Stem material (14)	
M	High Strength S. Steel
Z	Inconel
Seat material (15)	
A	TFM
C	PCTFE
P	CF PTFE
Inner Seal Material (16)	
A	TFM
G	Expanded graphite
Outer Seal Material (17)	
G	Expanded graphite
A	TFM

End connections (19-22)	
Flanged	
150(2)*	ASME B16.5 #150 RF
300(2)**	ASME B16.5 #300 RF
PN16(2)***	EN1092 PN16 RF
PN40(2)****	EN1092 PN40 RF

* C31, 73 series

** C32, C74 series

*** C77 series

**** C78 series


Special Features (24-30)	
BD	Bidirectional design
6.0	Short bonnet
SPR	Spring loaded seat, valve 2½" Full port and up
SPR*	Spring loaded seat, up to 2½" std. port
B	Body made from rolled bar
BSQ	Body made from square bar
FF	Flat face
F1**	F1 - DIN 3202-1 RF face-to-face size
F4***	F4 - DIN 3202-1 RF face-to-face size
F5****	F5 - DIN 3202-1 RF face-to-face size
Vxx	V port (xx = angle)
VBxx	Characterized control ball

* Applicable to Uni-directional valves only.

** Standard offer: 1½" & 2"

*** Standard offer: ½" to 1¼" & 2½" to 4"

**** Standard offer: 6"

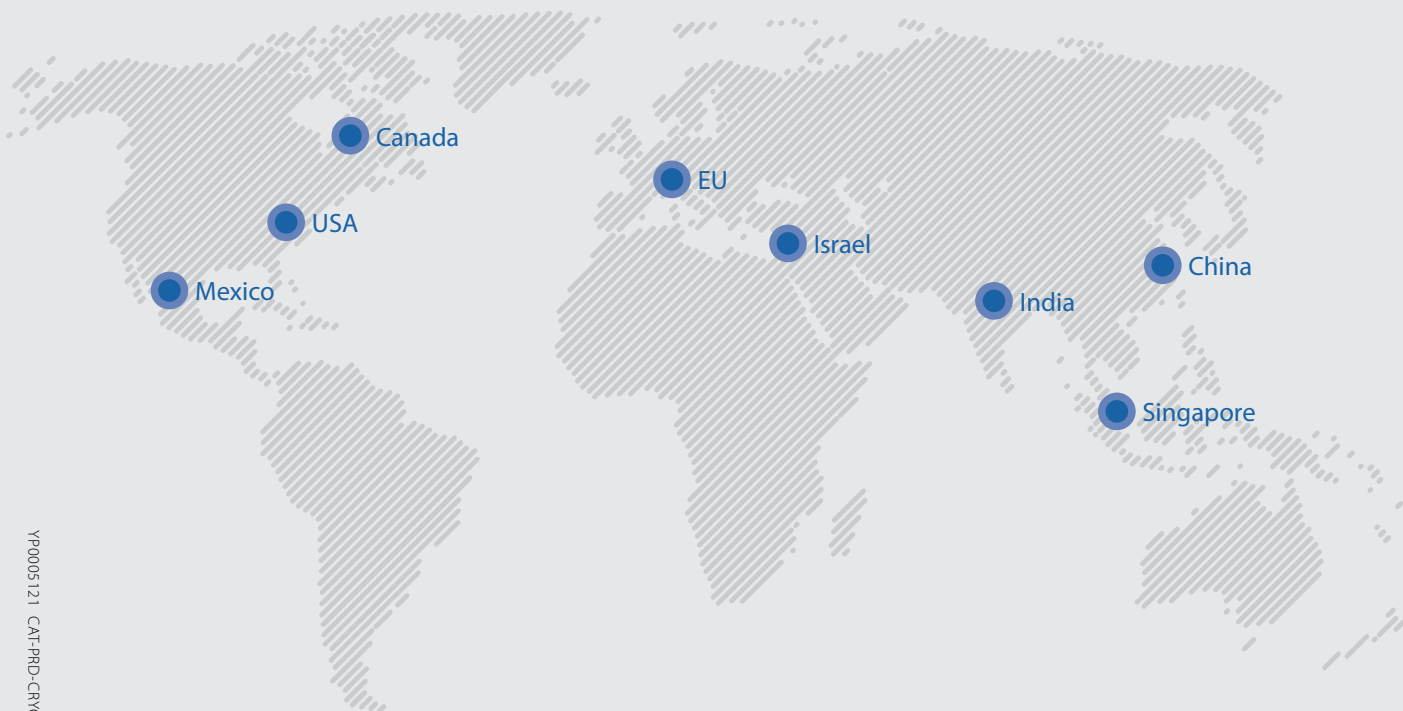

YP0005121 CAT-PRD-CRYO ver 04_090926

About Habonim

Ball Valves & Actuators for the most demanding, challenging and hazardous applications are our passion and profession for the last 70 years.

We believe in designing, manufacturing and supplying control and shutoff components and solutions that improves the overall safety, integrity and sustainability of the systems they are installed in.

Designed, manufactured and tested according to the highest standards, our products allow us to partner within systems that flow and control varied gases and liquids in diverse markets especially where extreme temperatures and pressures are involved, hazardous materials are used and system performances are critical.

We are leading in cryogenic ball valve-based control solutions, emergency shutoff and specially designed solutions.

Believing that supplying and developing the most effective, safe and reliable products for the global leaders in the LNG and Gas distribution market continually challenges us to improve our capabilities and products.

Best coping with our prestigious customers' most challenging requirements technically, operationally and commercially is our promise fulfilled for decades.

Performing in Demanding Applications



www.habonim.com

Habonim USA +1 866 261 8400 | Habonim Canada +1 866 261 8400 | Habonim EU +31 79 204 0781 | Habonim Singapore +65 8127 0221
Habonim China +86 186 168 08766 | Habonim Israel +972 (0) 4 691 4911 | Habonim India +972 (0) 4 691 4911 | Habonim Mexico +52 55 1384 3048